
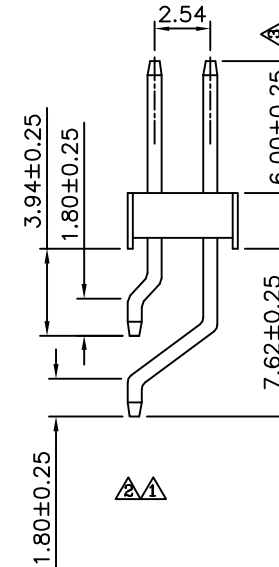
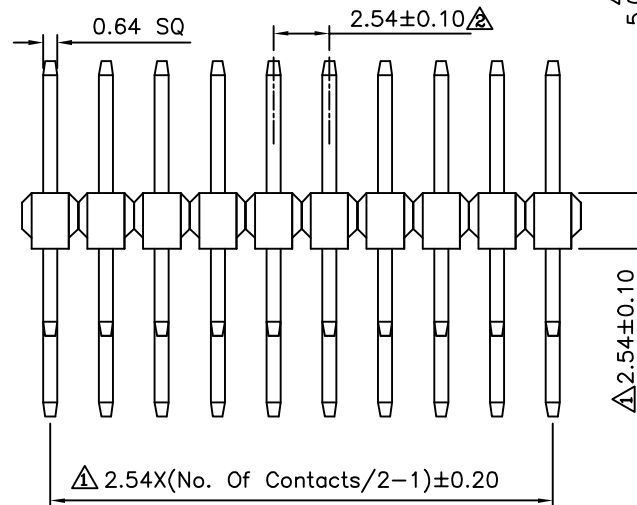
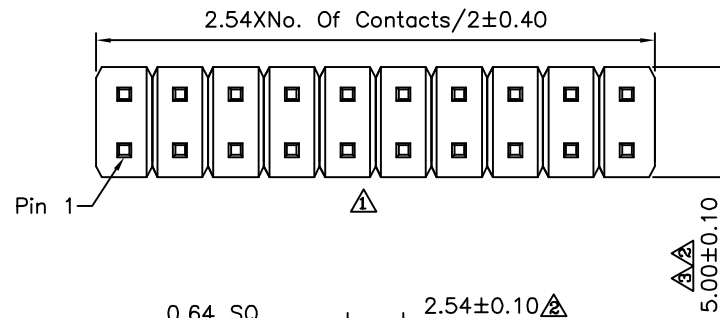


# SPECIFICATION

Current:3A  
 Insulation Resistance:1000 Megaohms Min.  
 Withstanding Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~80 Contacts  
 RoHS Compliant

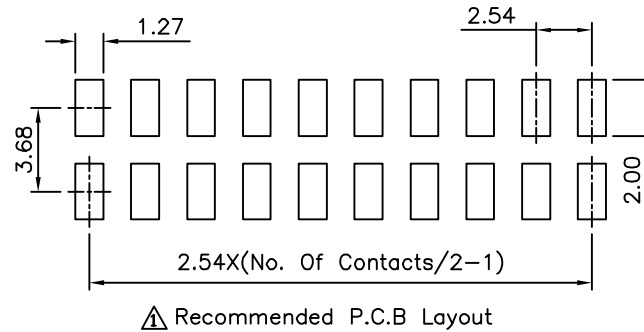

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

11178

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

UNIT

mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A3  |      | Modify Data | HZF | 12/13/2013 |
| A2  |      | Modify Data | HZF | 04/02/2012 |
| A1  |      | Modify Data | HZF | 01/26/2011 |
| A0  |      | NEW RELEASE | HZF | 01/18/2007 |