



SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

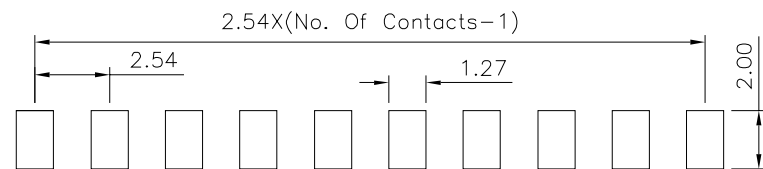


Recommended P.C.B. Layout




1X2P~1X36P




1X37P,1X38P,1X39P



1X40P

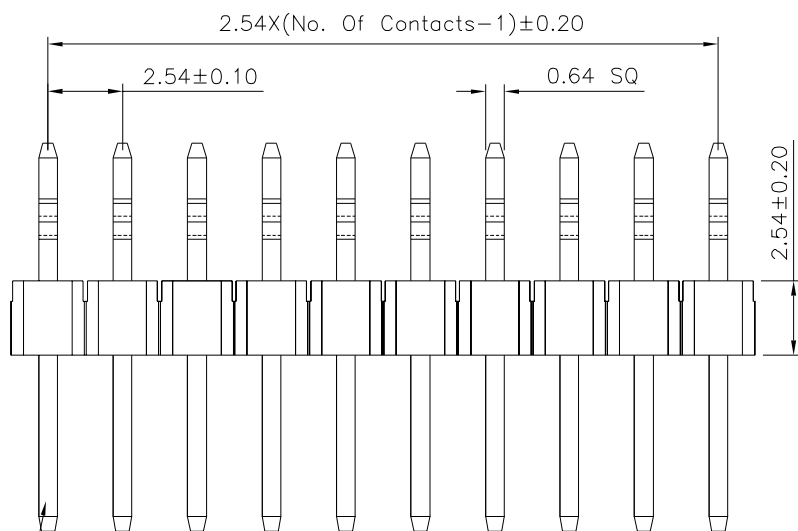

Pin 1

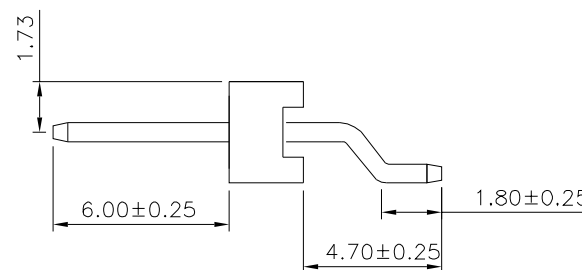

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11188

SCALE

NONE

REV.

B1

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
.XXX ±0.05

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ B1

Modify Data

HZF

03/20/2025

△ B0

NEW RELEASE

HZF

10/16/2019