




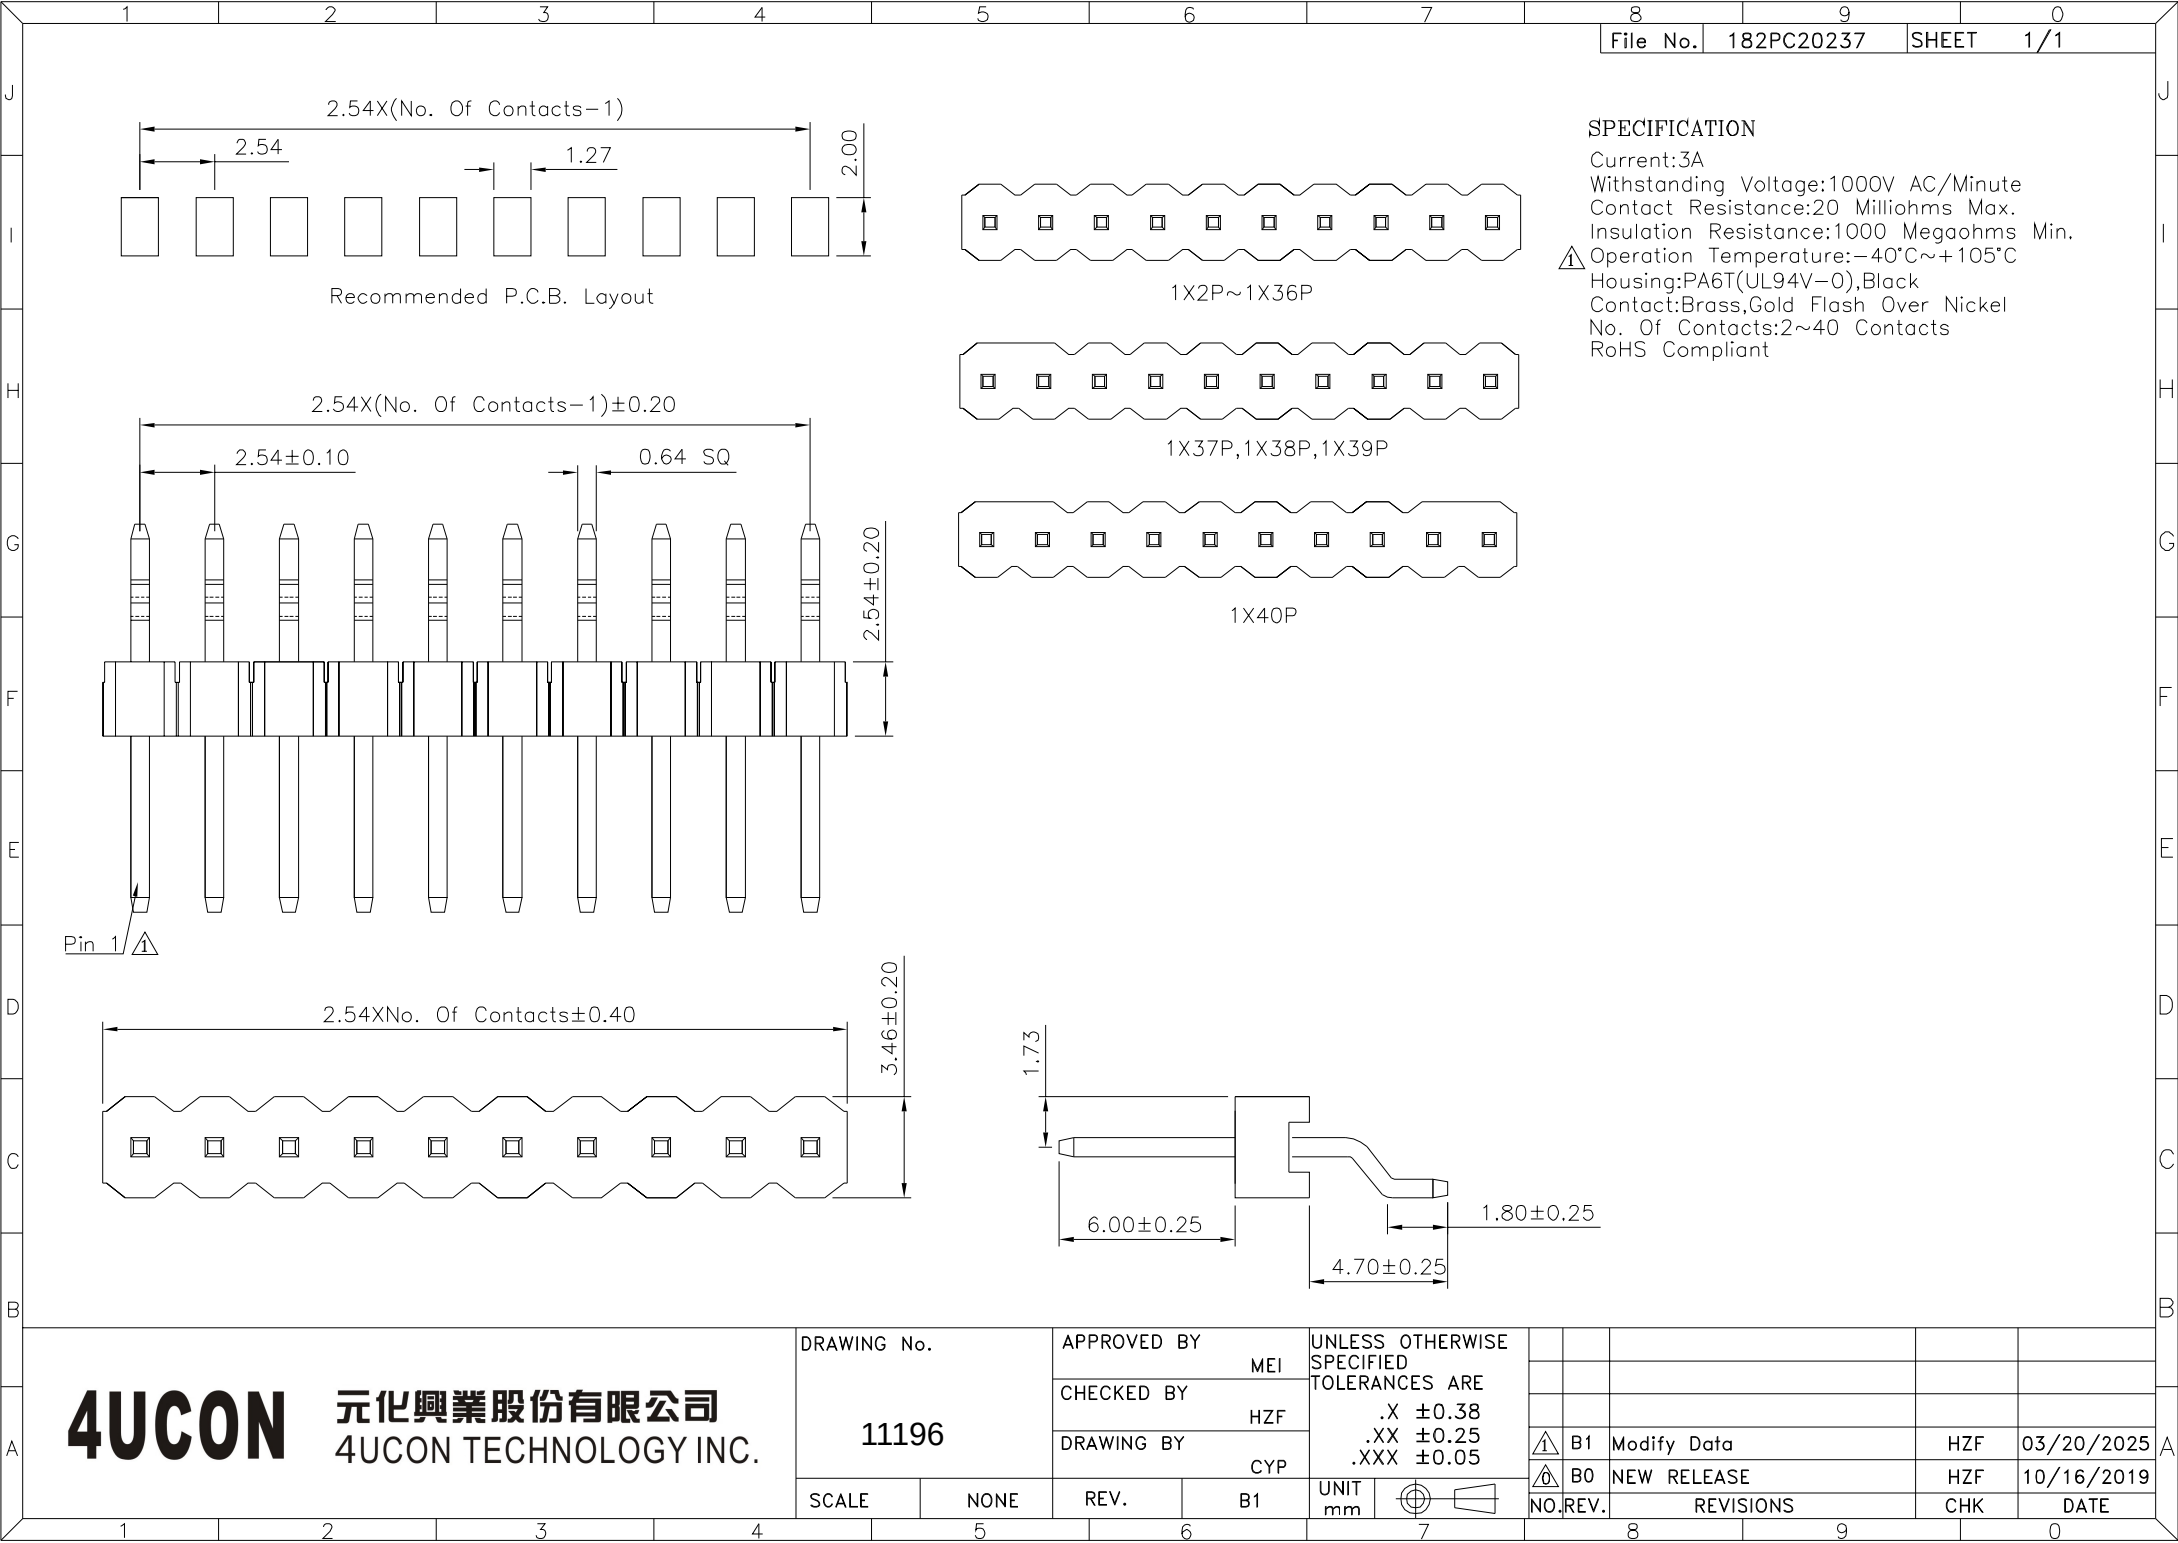


SPECIFICATION
Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠ Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant





1X2P~1X36P



1X37P,1X38P,1X39P



1X40P

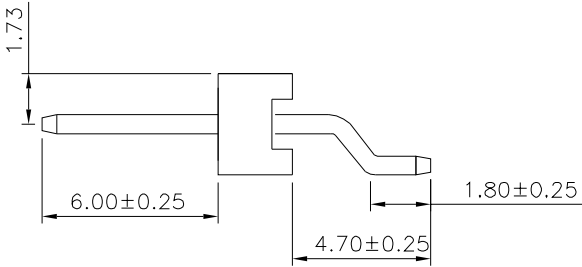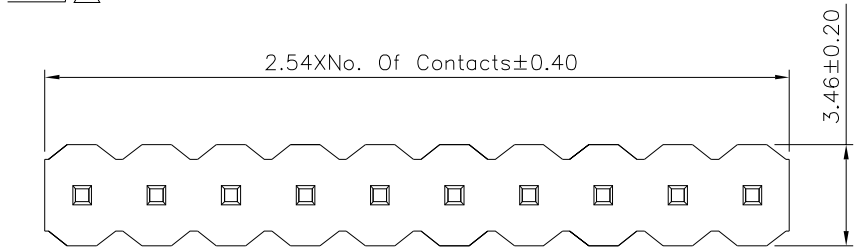

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.

11196

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

.XXX ± 0.05

UNIT
mm



B1

Modify Data

HZF

03/20/2025



B0

NEW RELEASE

HZF

10/16/2019

NO. REV.

REVISIONS

CHK

DATE