



Recommended P.C.B. Layout



1X2P~1X36P





1X37P, 1X38P, 1X39P



1X40P

### SPECIFICATION

Current: 3A  
 Withstanding Voltage: 1000V AC/Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Housing: PA6T(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 No. Of Contacts: 2~40 Contacts  
 RoHS Compliant

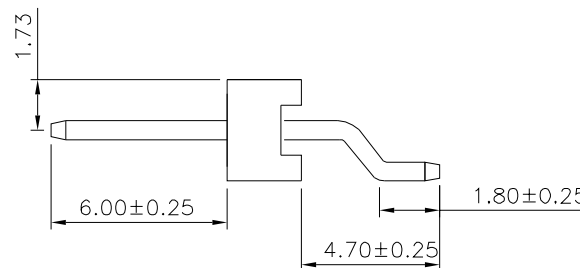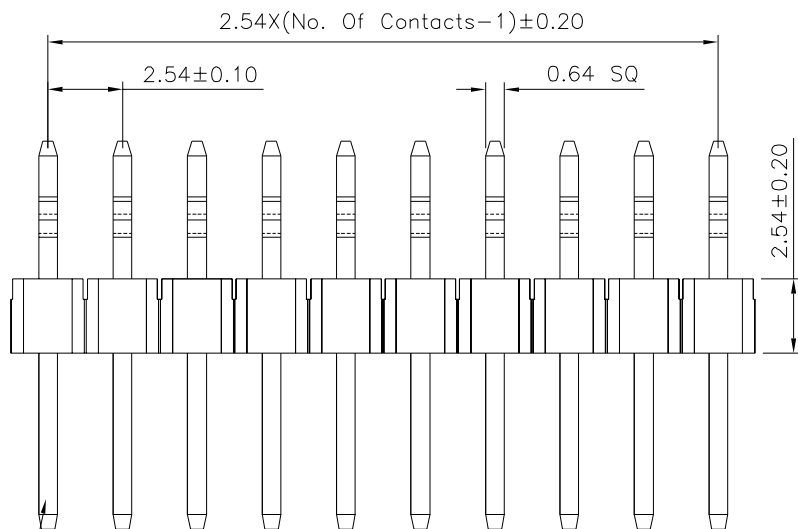

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

11214

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1


UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | B1   | Modify Data | HZF | 03/20/2025 |
| △   | B0   | NEW RELEASE | HZF | 10/16/2019 |