


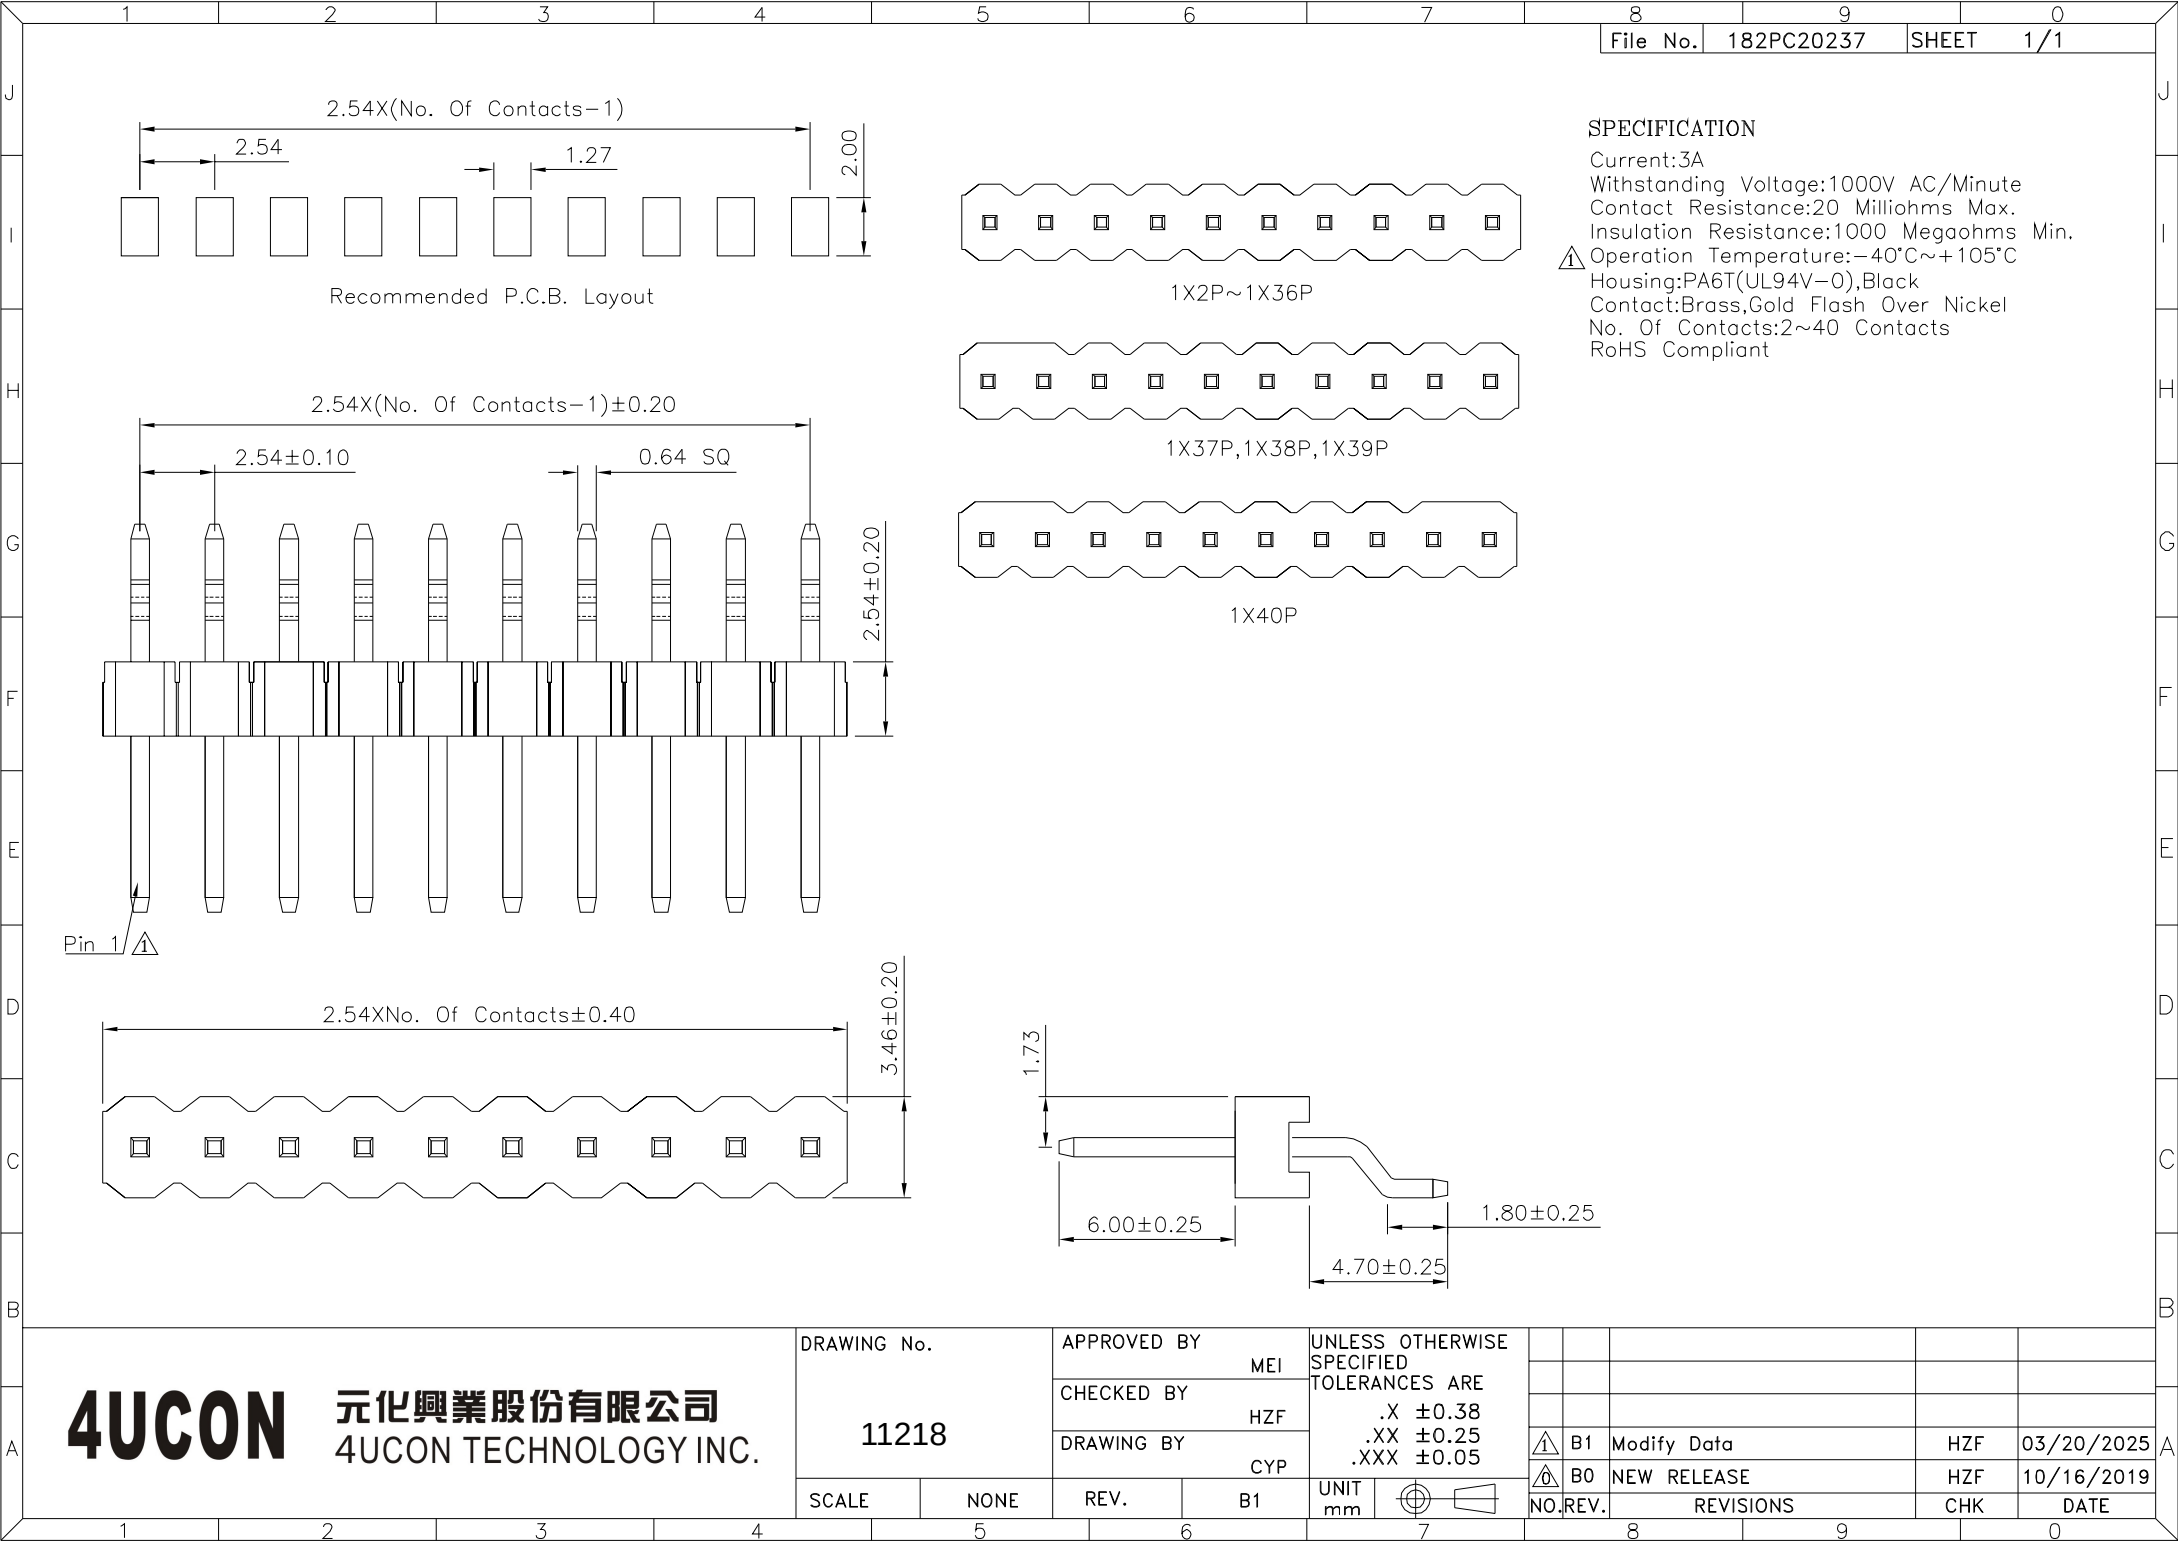

SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠ Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.
11218

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
.XXX ±0.05


SCALE

NONE

REV.

B1

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	B1	Modify Data	HZF	03/20/2025
⚠	B0	NEW RELEASE	HZF	10/16/2019