


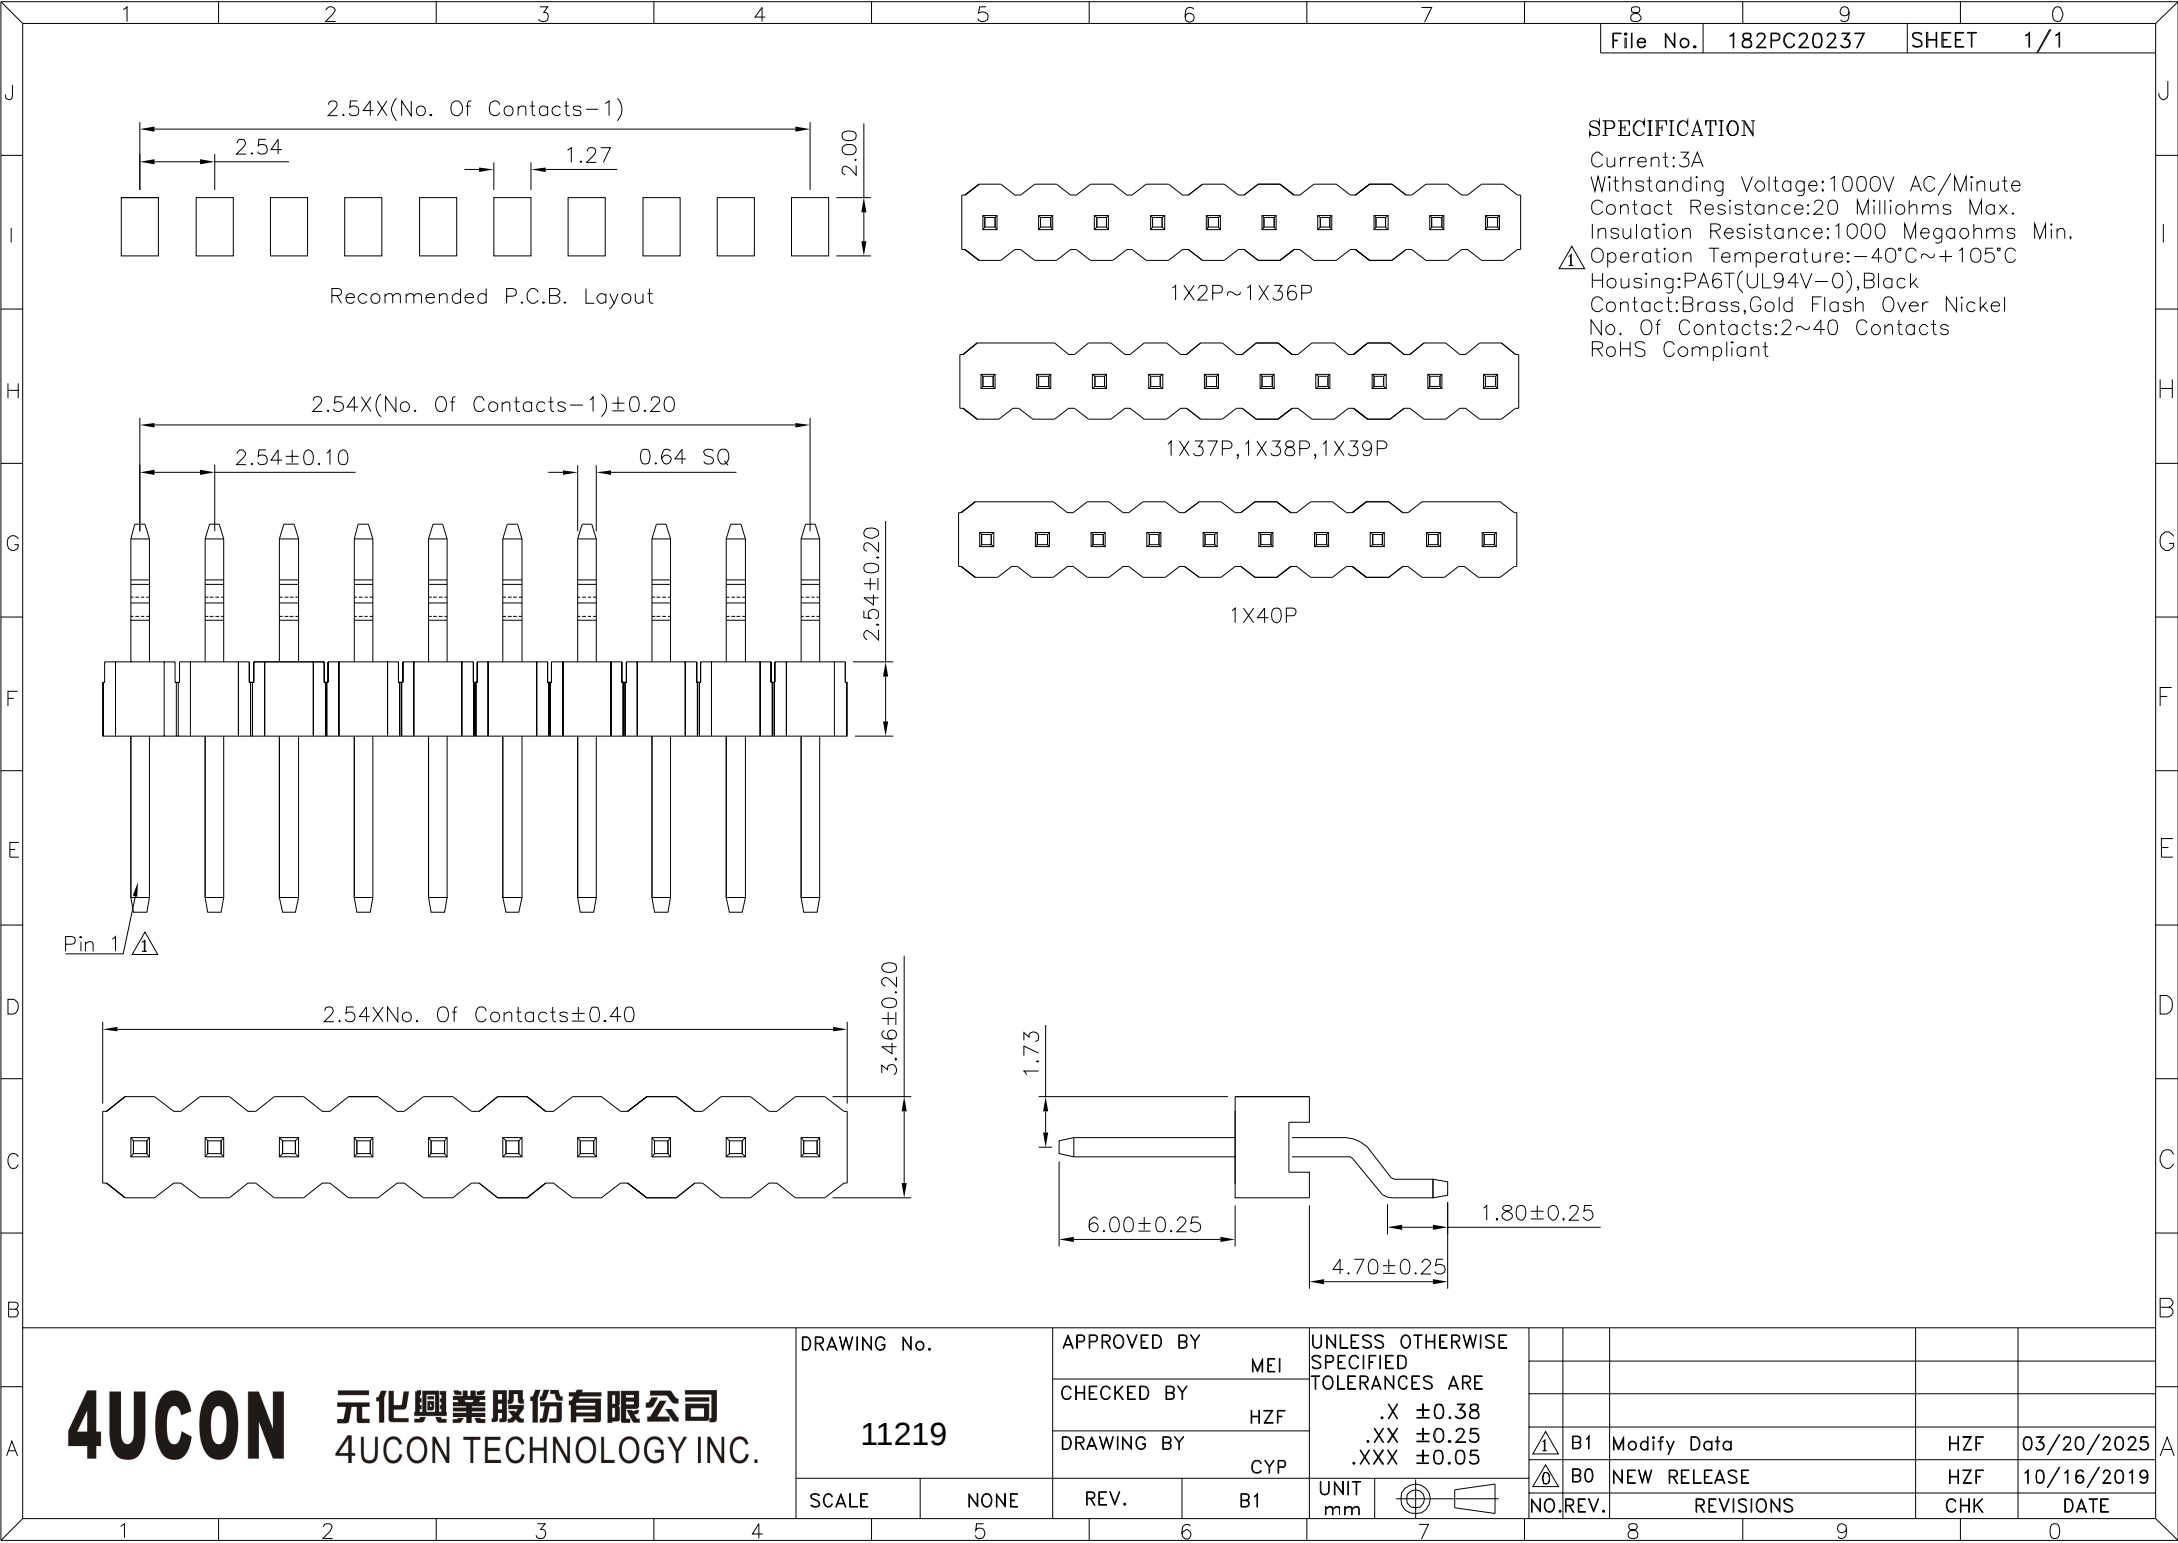

SPECIFICATION
Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠ Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 11219		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY		.X ±0.38 .XX ±0.25 .XXX ±0.05	⚠ B1	Modify Data		HZF	03/20/2025	A
		CYP			⚠ B0	NEW RELEASE		HZF	10/16/2019	
SCALE	NONE	REV.	B1	UNIT mm		NO. REV.	REVISIONS		CHK	DATE