


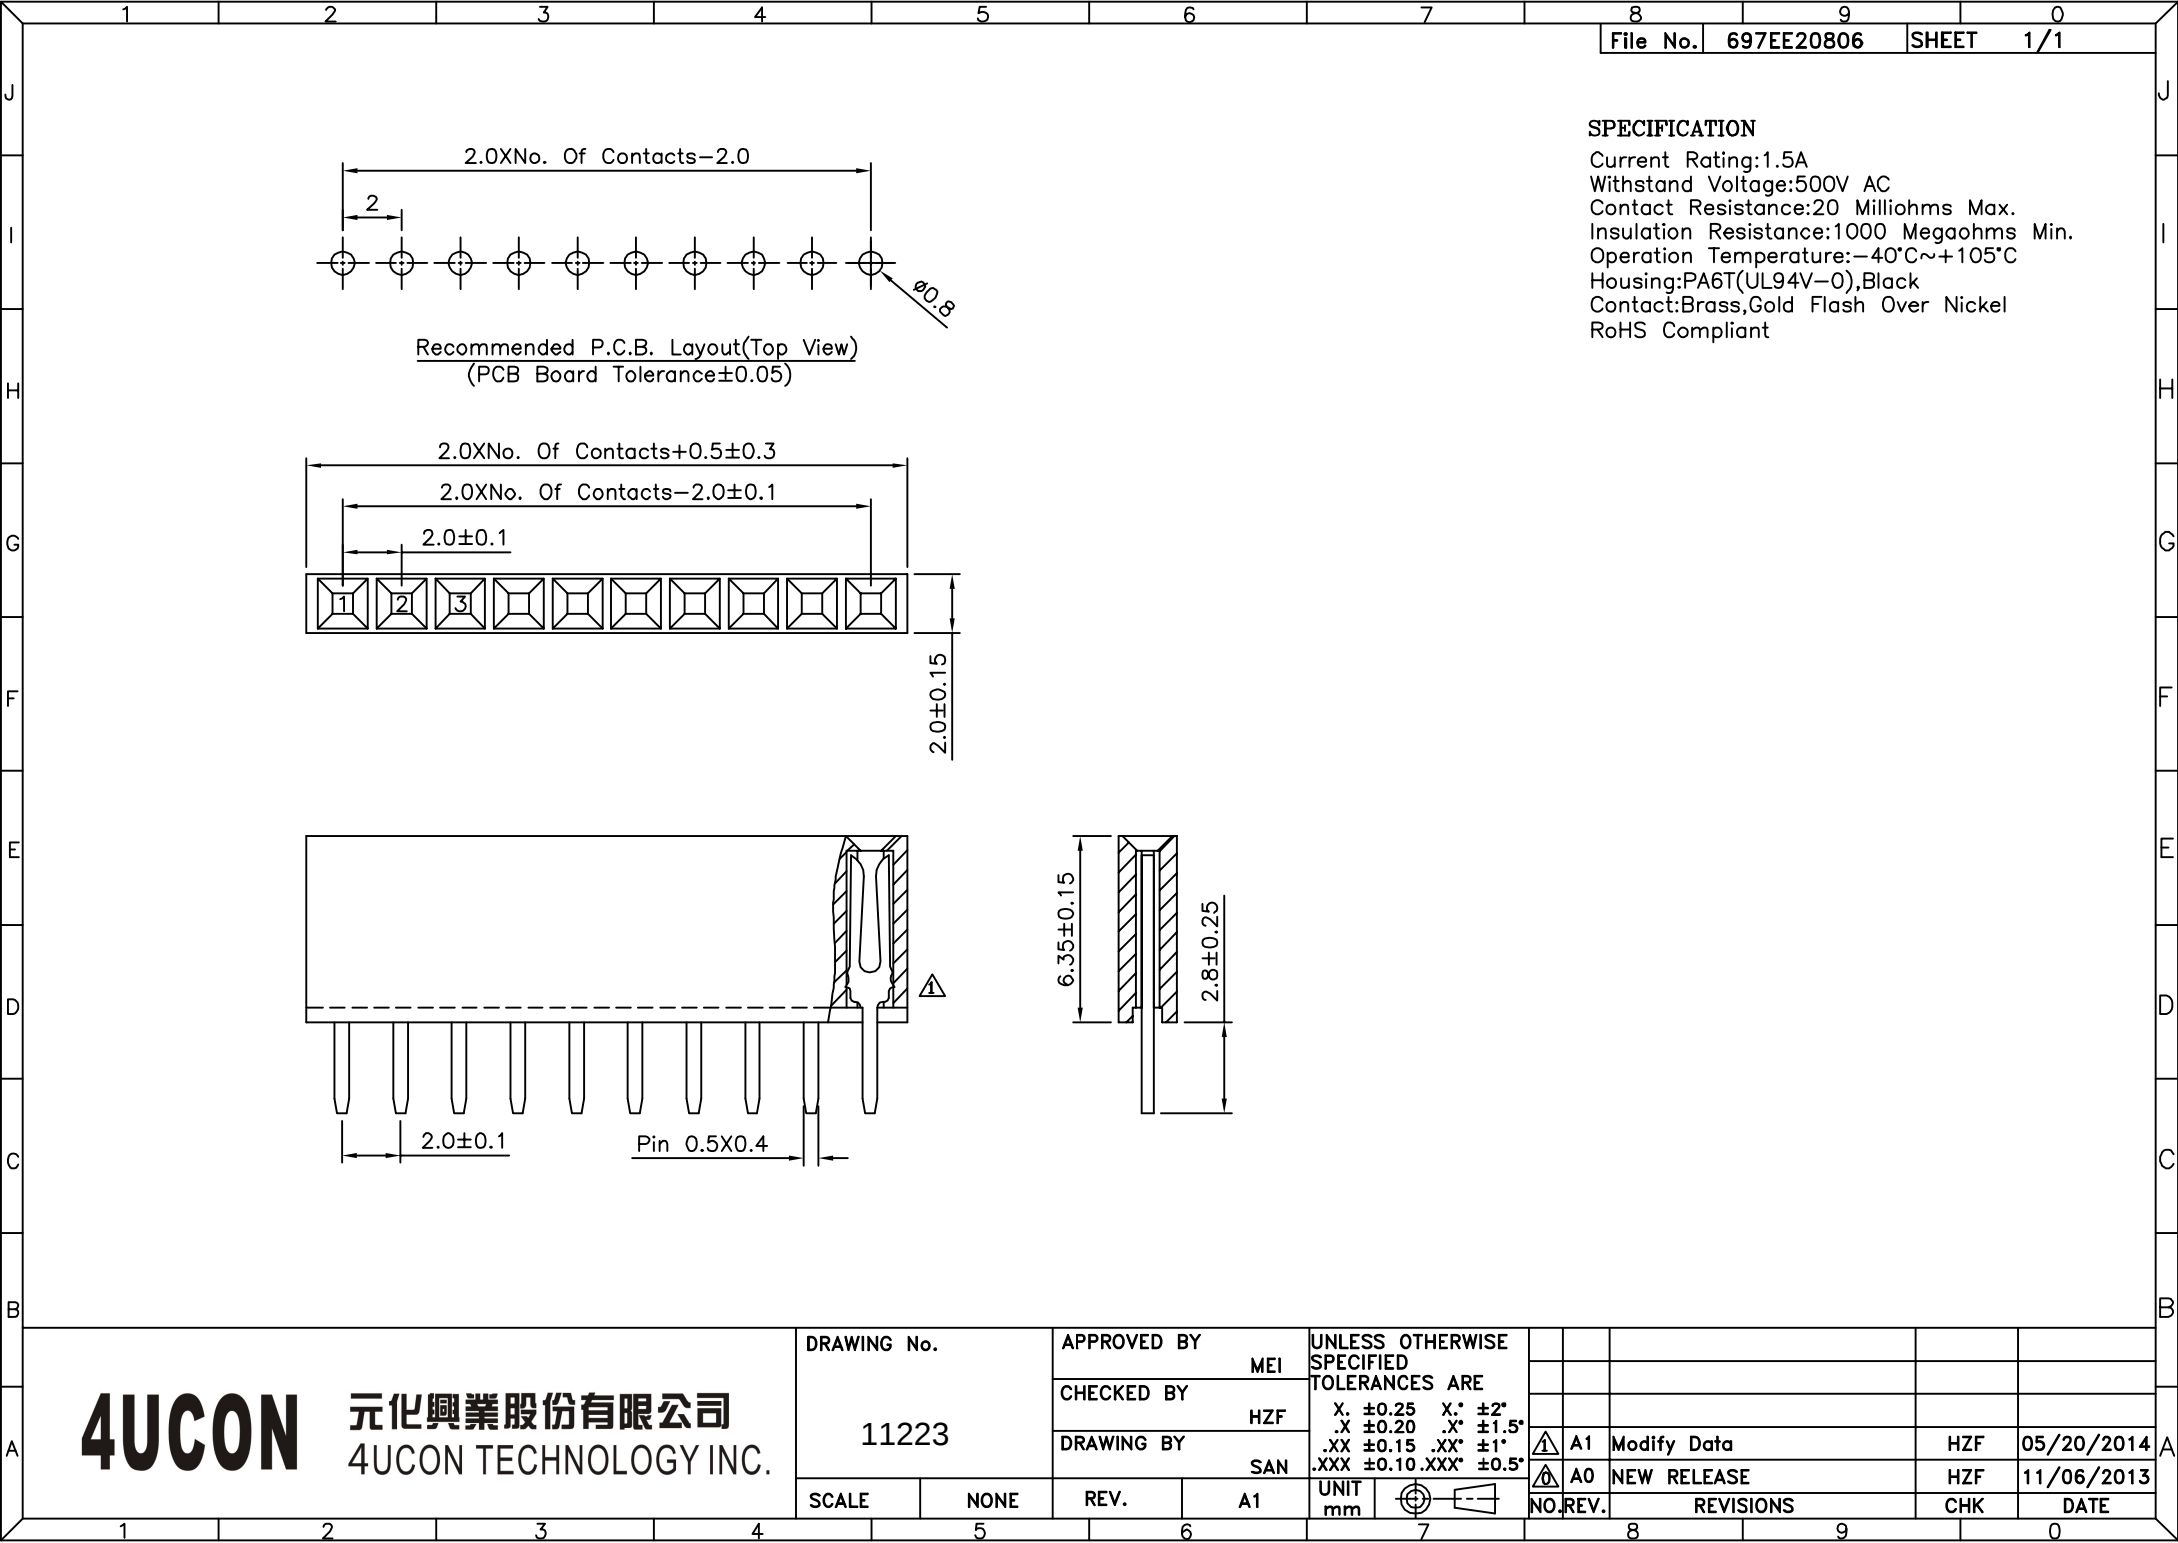

SPECIFICATION
Current Rating:1.5A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

DRAWING No. 11223		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2" .X ±0.20 .X* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"						
		CHECKED BY HZF								
		DRAWING BY SAN								
SCALE	NONE	REV.	A1	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE
						A1		Modify Data	HZF	05/20/2014
						A0		NEW RELEASE	HZF	11/06/2013