
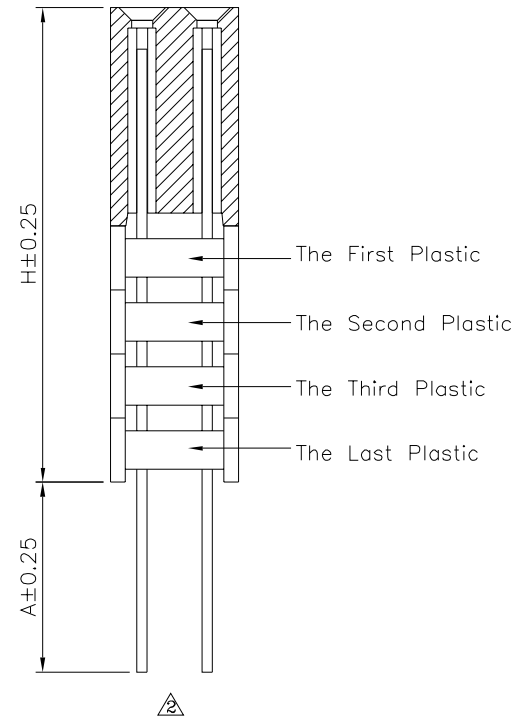
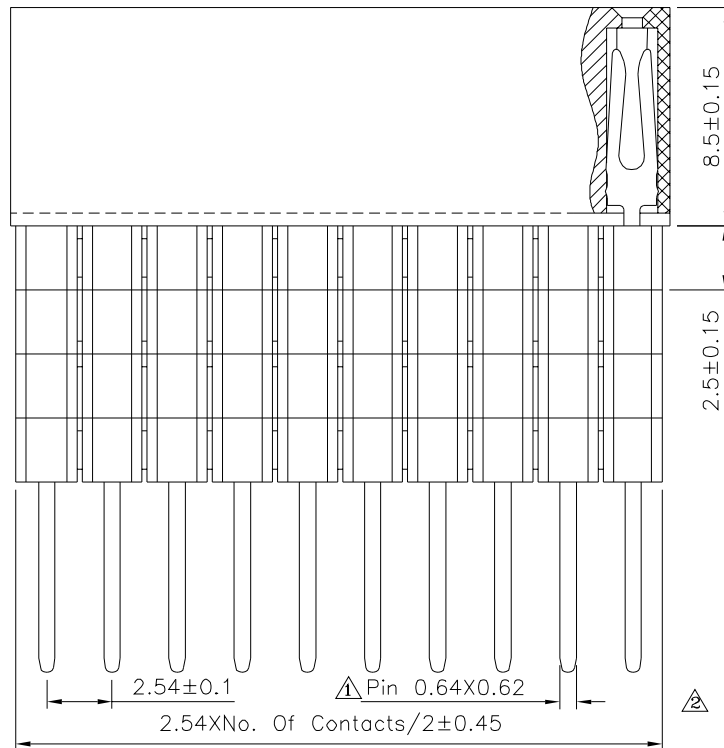


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

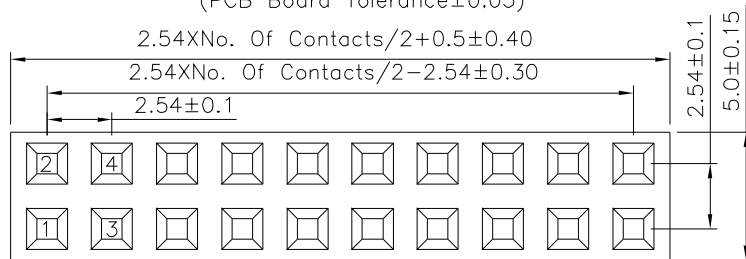

### SPECIFICATION

Current Rating:3A

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C

- Insulator:PA9T(UL94V-O),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

| Series no. | Plastic Q'ty | H     | A     |
|------------|--------------|-------|-------|
| 0196       | 1            | 11.00 | 2.30  |
| 0196       | 1            | 11.00 | 7.00  |
| 0196       | 1            | 11.00 | 12.30 |
| 0197       | 2            | 13.50 | 4.50  |
| 0197       | 2            | 13.50 | 9.80  |
| 0198       | 3            | 16.00 | 2.00  |
| 0198       | 3            | 16.00 | 7.30  |
| 0199       | 4            | 18.50 | 4.80  |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

11264

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.


A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X  $\pm 0.30$  X  $\pm 2^\circ$   
.XX  $\pm 0.25$  .X  $\pm 1.5^\circ$   
.XXX  $\pm 0.20$  .XX  $\pm 1.0^\circ$   
.XXX  $\pm 0.15$  .XXX  $\pm 0.5^\circ$

UNIT

mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 01/26/2024 |
| A1  |      | Modify Data | HZF | 12/20/2023 |
| A0  |      | NEW RELEASE | HZF | 05/03/2014 |