

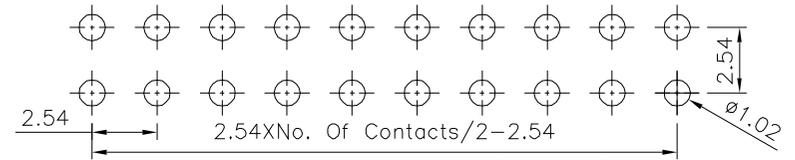
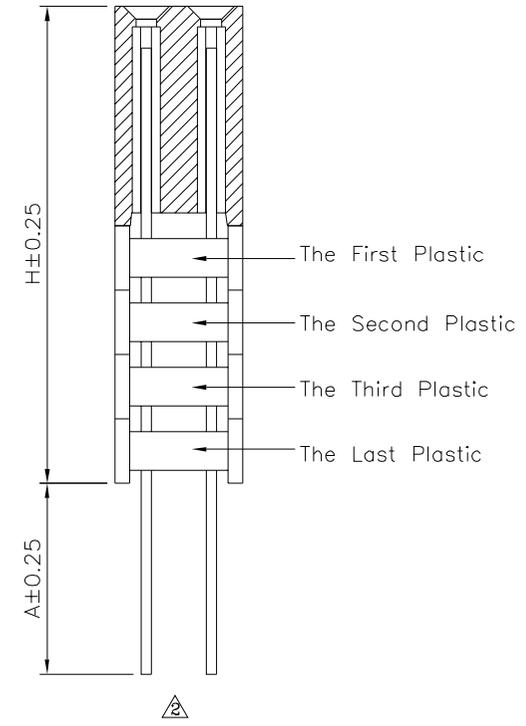


SPECIFICATION
 Current Rating:3A
 ⚠ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 ⚠ Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

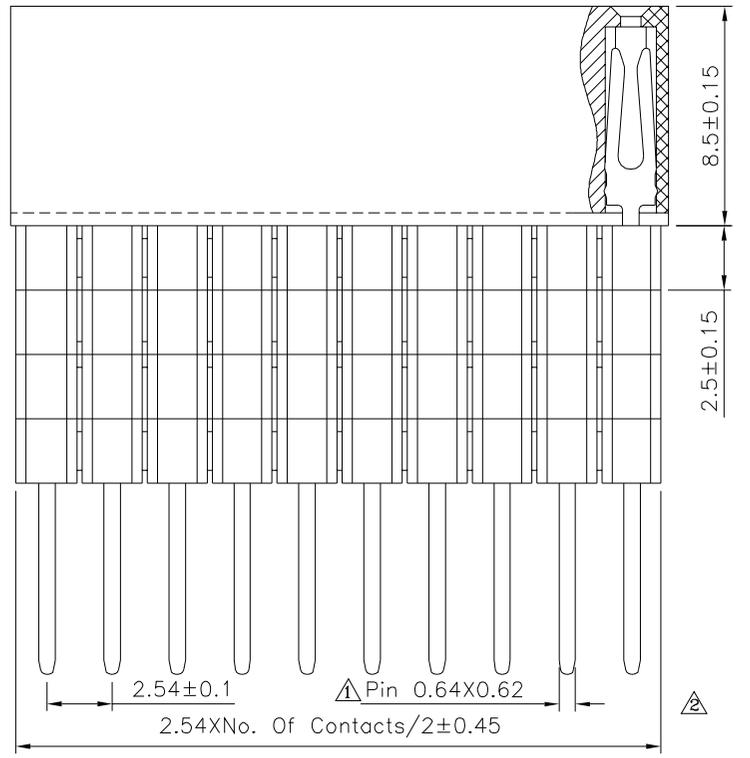

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

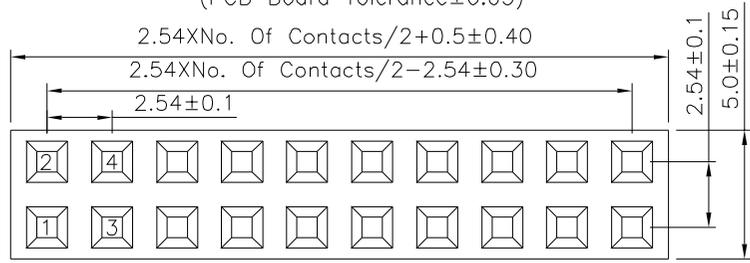

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠x. ±0.30 x. ±2° .x ±0.25 .x. ±1.5° .xx ±0.20 .xx. ±1.0° .xxx ±0.15 .xxx. ±0.5°
11297		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		HAO		
SCALE	NONE	REV.	A2	NO. REV.

⚠ A2	Modify Data	HZF	01/26/2024
⚠ A1	Modify Data	HZF	12/20/2023
⚠ A0	NEW RELEASE	HZF	05/03/2014
NO. REV.	REVISIONS	CHK	DATE