




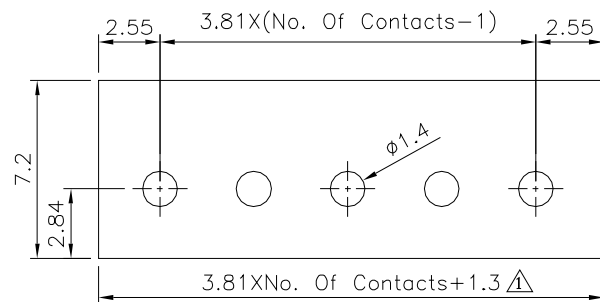


△ Recommended P.C.B. Layout

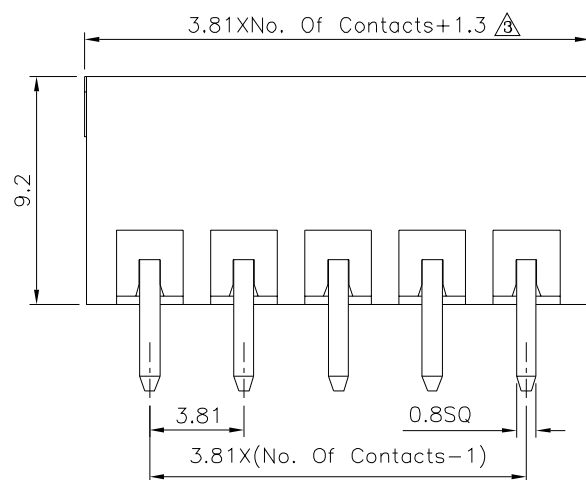

2P To 6P Open Type
Above 7P (Including 7P)
Close Type

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

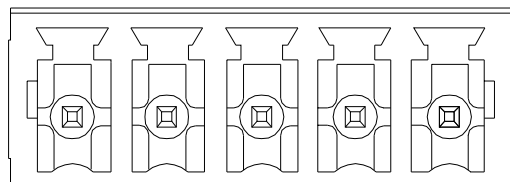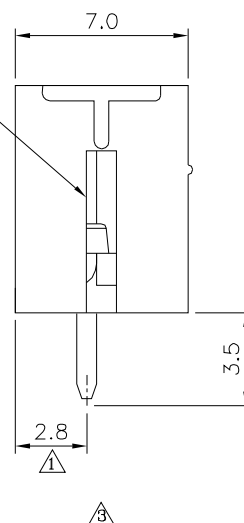

△△ SPECIFICATION

Current Rating:12A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:1600V AC/Minute
Operation Temperature:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△

11410

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △


X. ±0.50

.X ±0.40

.XX ±0.30

ANG. ±1°

UNIT
mm



NO.

REV.

REVISIONS

CHK

DATE

△ A3

△ A2

△ A1

△ A0

Modify Mata

Modify Mata

Modify Mata

NEW RELEASE

HZF

HZF

HZF

HZF

06/15/2026

01/30/2016

08/14/2012

04/10/2009