



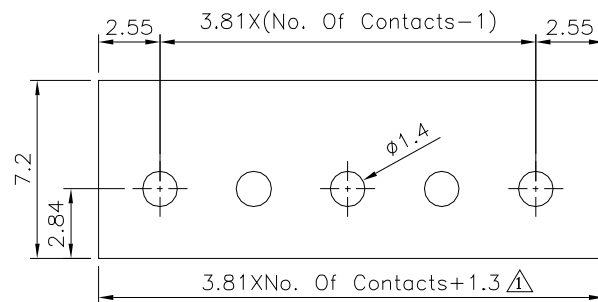


△3 Recommended P.C.B. Layout

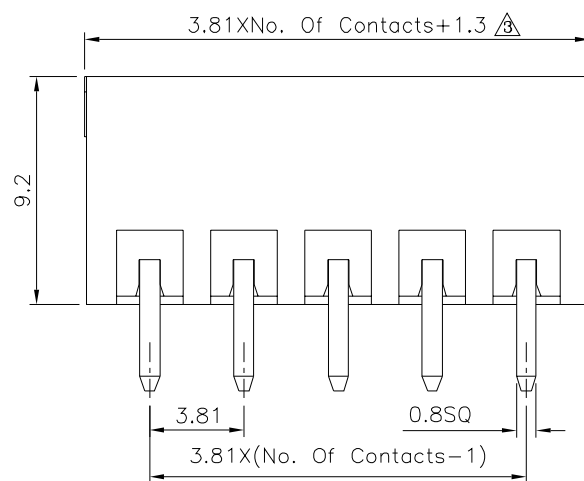


2P To 6P Open Type ☐
Above 7P (Including 7P)
Close Type

Length(L)	Tolerances
0~30	± 0.30
30~60	± 0.40
60~120	± 0.50
120~220	± 0.60

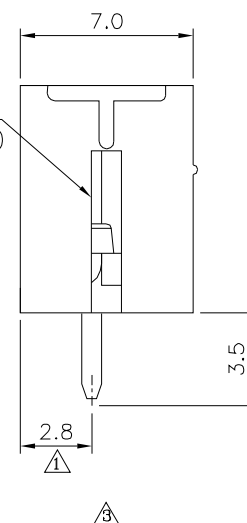

△₃△₁ SPECIFICATION

Current Rating:12A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:1600V AC/Minute
Operation Temperature:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

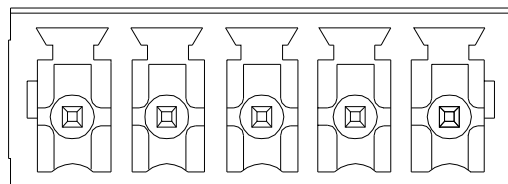

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 1 2

11411

APPROVED BY

Jason Wu

CHECKED BY

Leo Han


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE $\triangle 3$

 $X, \pm 0.50$

.X ± 0.40

 ± 0.30

	UNIT mm
--	------------



	A3	

	A3
	A2

$\triangle 2$	AZ
$\triangle$	A1

	A1
.	

		AO
--	---	----

6	Modify Mata
---	-------------

mean/ mat	
Modif: Mat	

-	Modify Mata
---	-------------

Modify Mata

NEW RELEASES

a

a

a

SE

HZF

H2E
H7E

HZF
HZF

HZF

HZF

06/15/2026

01 / 30 / 2016

01/30/2016	
02/11/2016	

08/14/2012	
------------	--

04/10/2009