

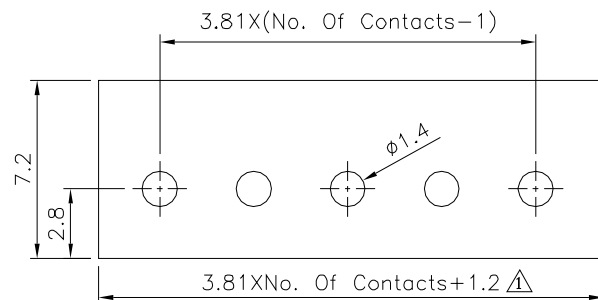
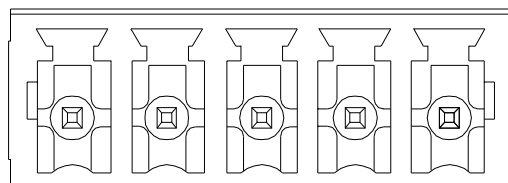


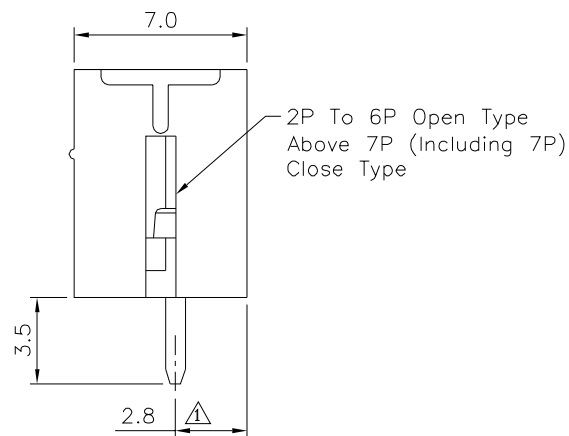

Recommended P.C.B. Layout

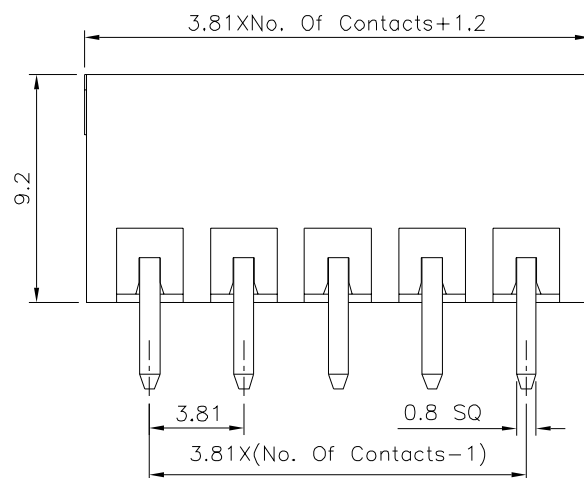

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC(1 Minute)
 Test Time=60s/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body:Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△

11414

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT mm

SCALE NONE

REV. A2

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	01/30/2016
△1	A1	Modify Data	HZF	08/14/2012
△0	A0	NEW RELEASE	HZF	04/10/2009