

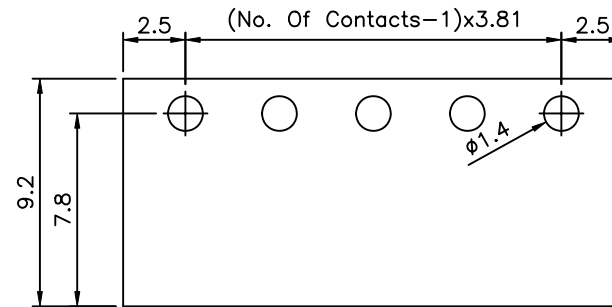
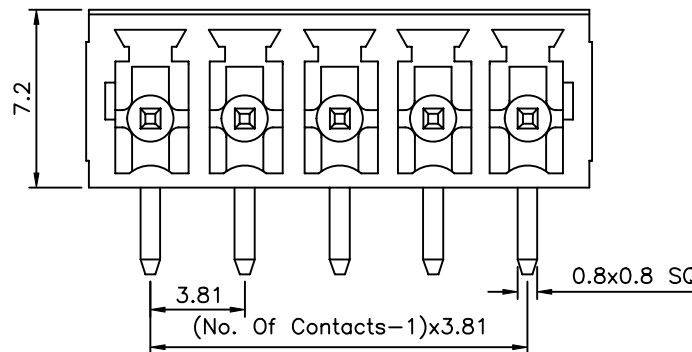


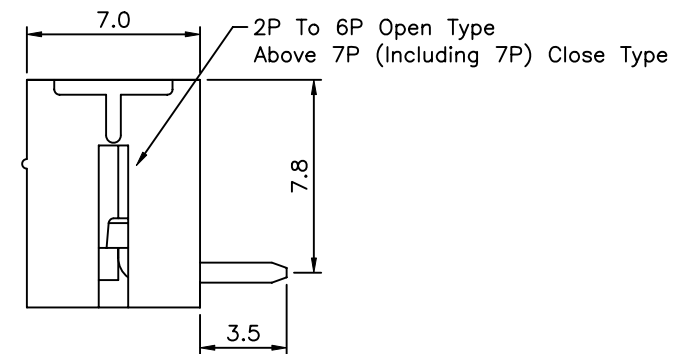

P.C.B Layout

SPECIFICATION

Current Rating:8A
Voltage Rating:250V AC
Withstanding Voltage:AC 1200V(1Minute)
Insulation Resistance:500 Megaohms At DC 500V
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5Seconds Max.
Insulator Body(Housing):Polyamide
(Glass Filled)UL94V-0,Green
Solder Pin:Brass,Tin Plated
RoHS Compliant

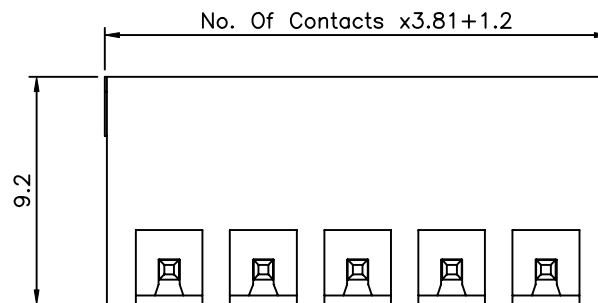

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11417

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HYY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

SCALE

NONE

REV.

A0

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

04/10/2009

DATE