

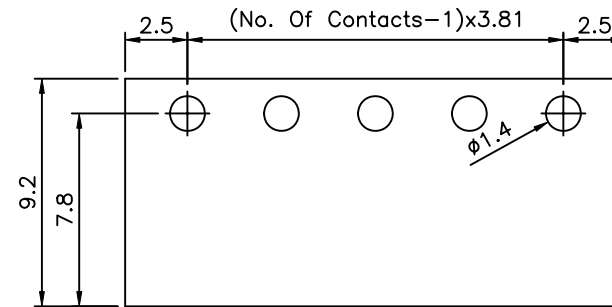
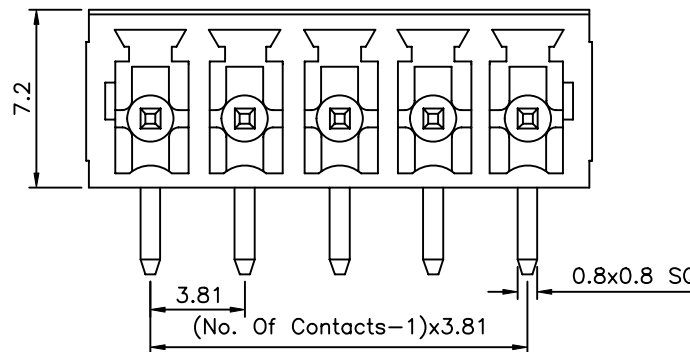


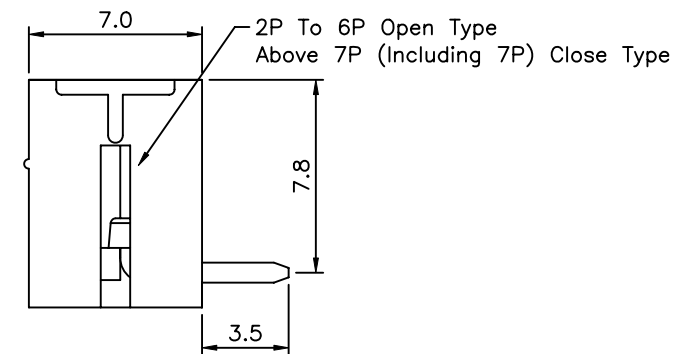

P.C.B Layout

SPECIFICATION

Current Rating:8A
 Voltage Rating:250V AC
 Withstanding Voltage:AC 1200V(1Minute)
 Insulation Resistance:500 Megaohms At DC 500V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5Seconds Max.
 Insulator Body(Housing):Polyamide
 (Glass Filled)UL94V-0,Green
 Solder Pin:Brass,Tin Plated
 RoHS Compliant

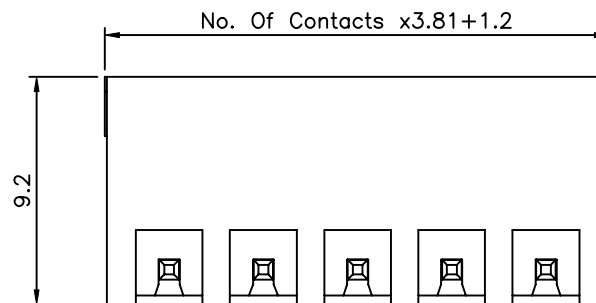

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11420

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HYY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 1^\circ$

SCALE

NONE

REV.

A0

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

04/10/2009

DATE