

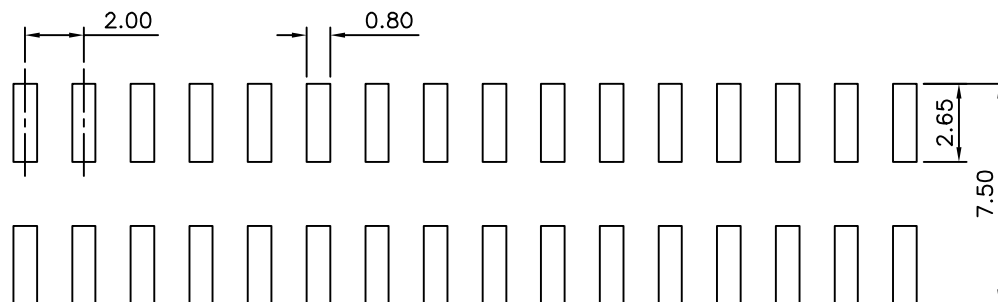
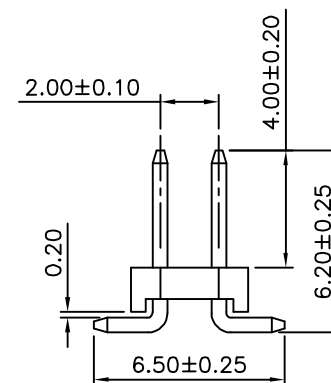


SPECIFICATION

Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

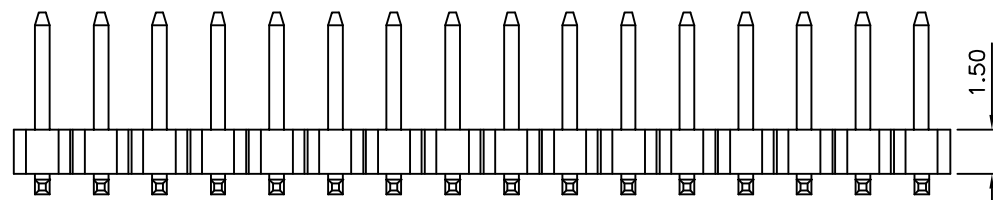

Recommended P.C.B. Layout

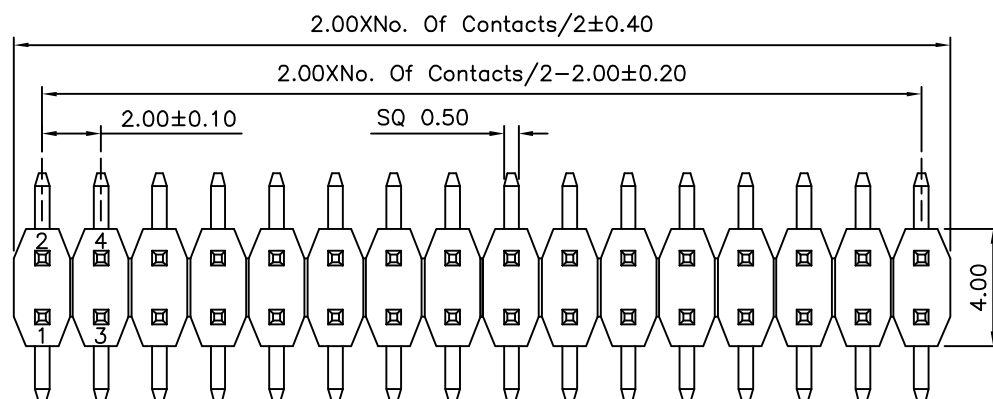

DRAWING No.

11514

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT mm



NO.

REV.

AO

NEW RELEASE

REVISIONS

HZF

CHK

05/03/2012

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.