File No. 689GA30806 SHEET 1/1

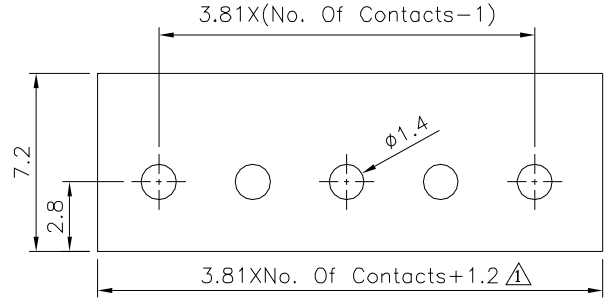

Recommended P.C.B. Layout

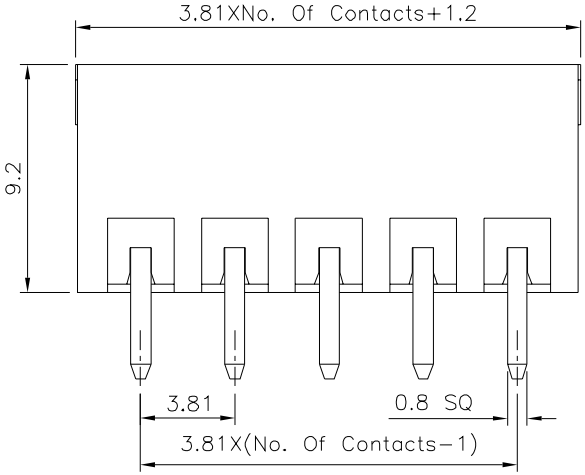

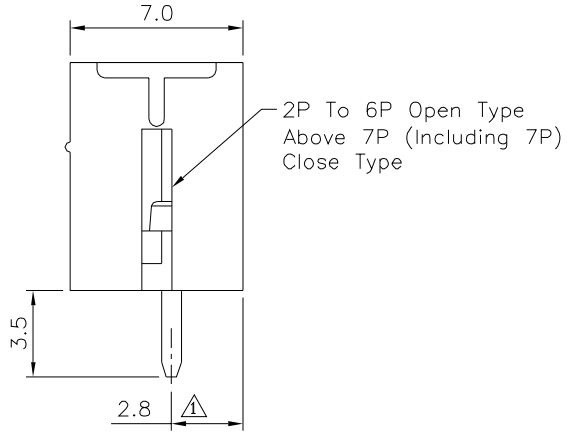

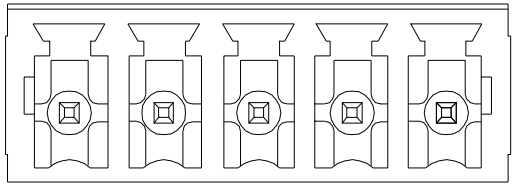

⚠1 SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60s/1 PCS
Operation Temperature:−40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V−0),Green
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. ⚠2⚠1	11669
APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	CYP
SCALE	NONE
REV.	A2
UNIT	mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
⚠2	A2	Modify Data	HZF	01/30/2016
⚠1	A1	Modify Data	HZF	08/14/2012
⚠0	A0	NEW RELEASE	HZF	04/10/2009