File No.	689	SHEET	1/1

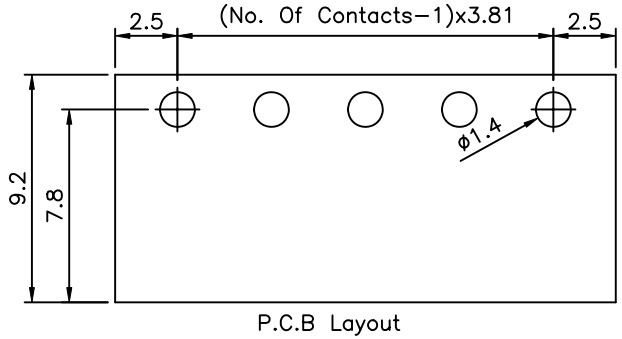

P.C.B Layout

SPECIFICATION
Current Rating:8A
Voltage Rating:250V AC
Withstanding Voltage:AC 1200V(1Minute)
Insulation Resistance:500 Megaohms At DC 500V
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5Seconds Max.
Insulator Body(Housing):Polyamide
(Glass Filled)UL94V−0,Green
Solder Pin:Brass,Tin Plated
RoHS Compliant

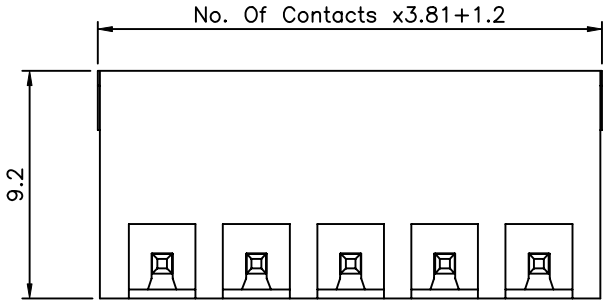

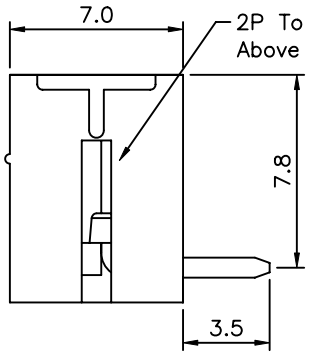

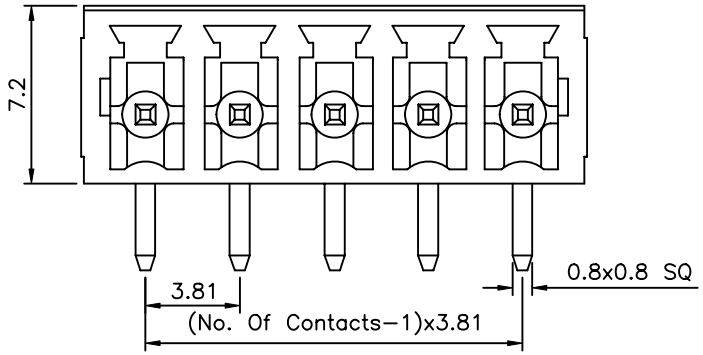

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
11675	MEI	X. ±0.50				
	CHECKED BY HZF	.X ±0.30				
	DRAWING BY HYY	.XX ±0.20				
		ANG. ±1°				
SCALE NONE	REV. A0	UNIT mm	⚠0	A0	NEW RELEASE	HZF 04/10/2009
			NO.	REV.	REVISIONS	CHK DATE