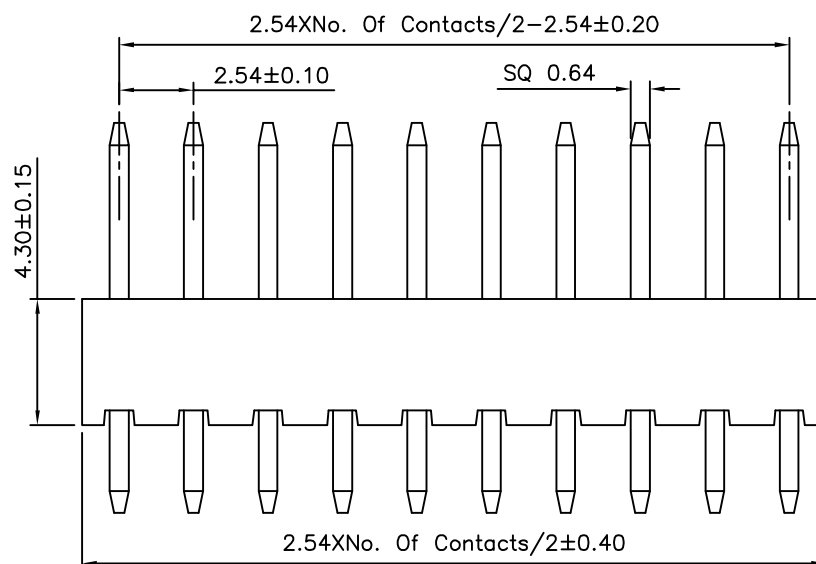
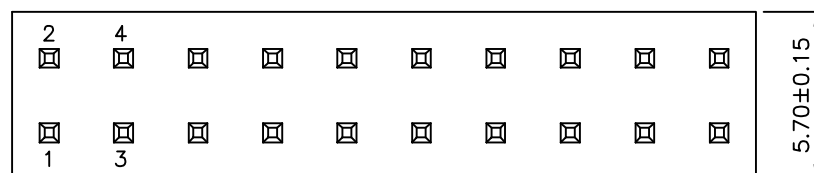



Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

11886

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO


Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

.X ± 0.40

.XX ±0.25

.XXX ±0.15
ANO 1.78

	UNIT
	mm



AO	
NO.	REV.

0	NEW RELEASE
Y.	REVIS

HZF
CHK

08/26/2012
DATE