
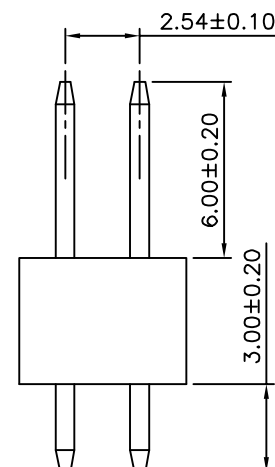
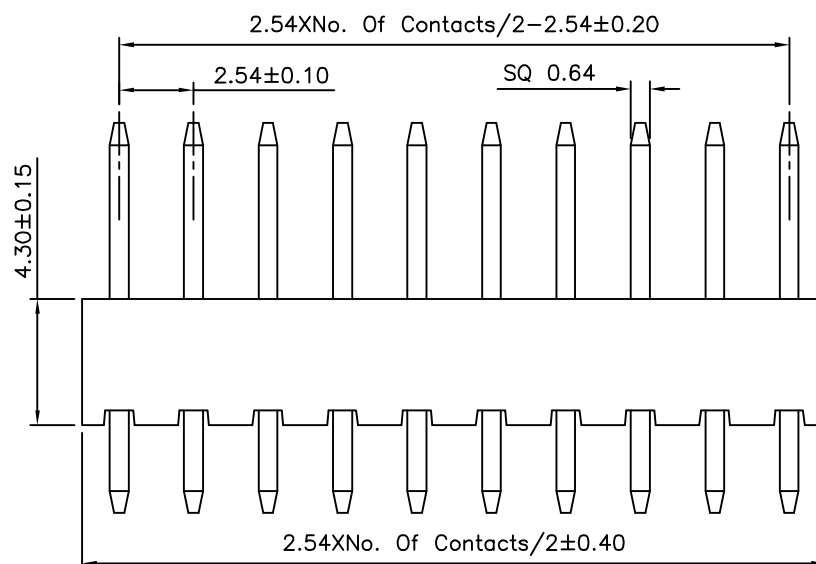


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

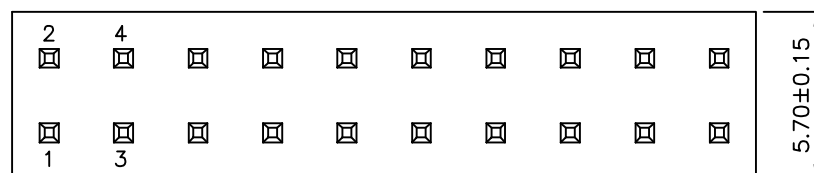

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

DRAWING No.

APPROVED BY

EMILY

CHECKED BY	
------------	--

HZF


DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.40
.XX	± 0.25
.XXX	± 0.15
ANG.	$\pm 3^\circ$

	UNIT
	mm



AO	
NO.	REV.

0	NEW RELEASE
Y.	REVIS

HZF
CHK

08/26/2012
DATE

SCALE

NONE

REV.

AO

	UNIT
	mm

NO.	REV.
-----	------

REVISIONS

CHK

08/20/2012
DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.