
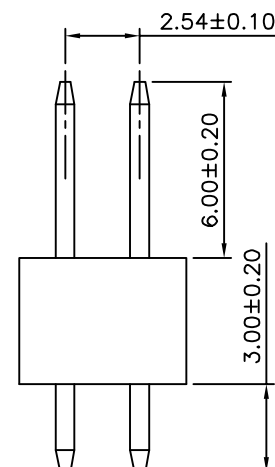
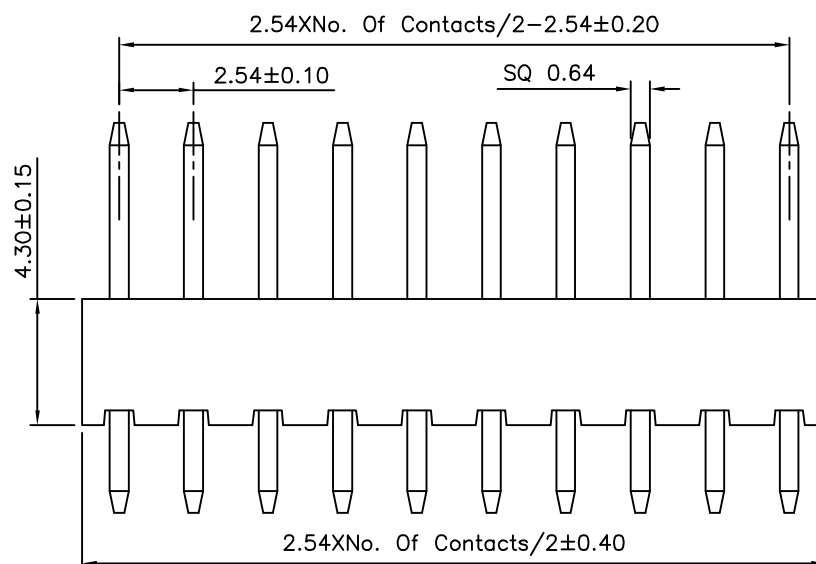


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

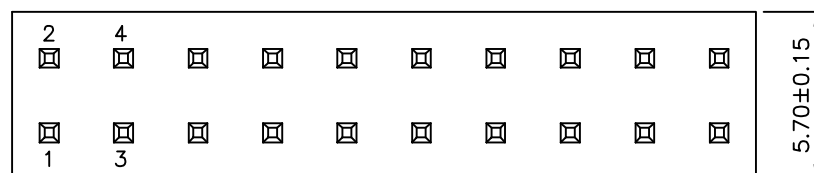

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

DRAWING No.

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

AO

UNIT
12.122

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X	± 0.40
.XX	± 0.25
.XXX	± 0.15
ANG.	$\pm 3^\circ$

AO	NO REV
----	--------

D	NEW RELEASE
V	REVIS

REVISIONS

HZF
CHK

08/26/2012
DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.