
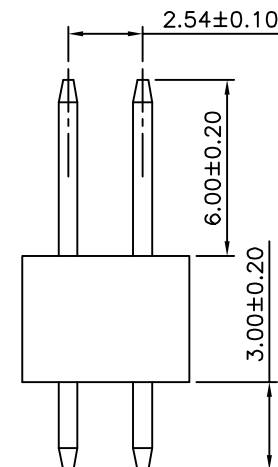
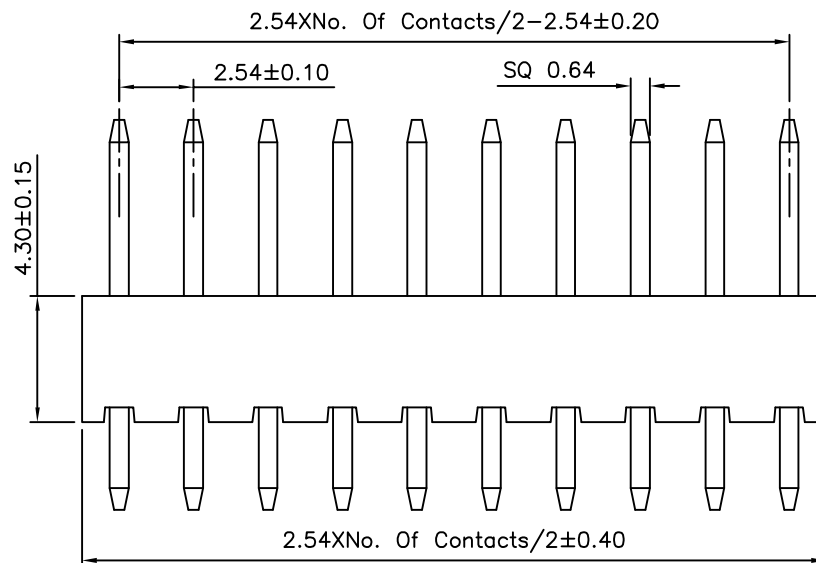


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

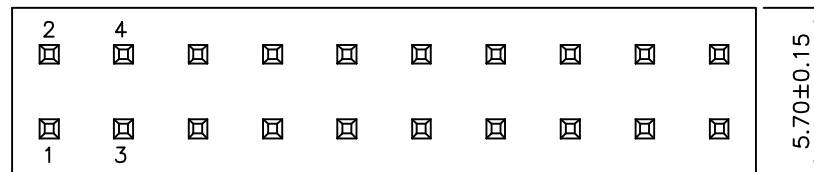

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

DRAWING No.

11916

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

GAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
	.X ± 0.40
	.XX ± 0.25
	.XXX ± 0.15
	ANG. $\pm 3^\circ$

	UNIT
	mm



AO	
NO.	REV.

	NEW RELEASE
.	REVIS

HZF
CHK

08/26/2012
DATE

SCALE

NONE

REV.

AO

AO	
NO.	REV.

	NEW RELEASE
.	REVIS

HZF
CHK

08/26/2012
DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.