

SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant





12187

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

4UCON

1.10
 1.67±0.25

Pin	A	B	C	Pin	A	B	C
10	9.35	6.99	5.08	56	38.56	36.20	34.29
12	10.62	8.26	6.35	58	39.83	37.47	35.56
14	11.89	9.53	7.62	60	41.10	38.74	36.83
16	13.16	10.80	8.89	62	42.37	40.01	38.10
18	14.43	12.07	10.16	64	43.64	41.28	39.37
20	15.70	13.34	11.43	66	44.91	42.55	40.64
22	16.97	14.61	12.70	68	46.18	43.82	41.91
24	18.24	15.88	13.97	70	47.45	45.09	43.18
26	19.51	17.15	15.24	72	48.72	46.36	44.45
28	20.78	18.42	16.51	74	49.99	47.63	45.72
30	22.05	19.69	17.78	76	51.26	48.90	46.99
32	23.32	20.96	19.05	78	52.53	50.17	48.26
34	24.59	22.23	20.32	80	53.80	51.44	49.53
36	25.86	23.50	21.59	82	55.07	52.71	50.80
38	27.13	24.77	22.86	84	56.34	53.98	52.07
40	28.40	26.04	24.13	86	57.61	55.25	53.34
42	29.67	27.31	25.40	88	58.88	56.52	54.61
44	30.94	28.58	26.67	90	60.15	57.79	55.88
46	32.21	29.85	27.94	92	61.42	59.06	57.15
48	33.48	31.12	29.21	94	62.69	60.33	58.42
50	34.75	32.39	30.48	96	63.96	61.60	59.69
52	36.02	33.66	31.75	98	65.23	62.87	60.96
54	37.29	34.93	33.02	100	66.50	64.14	62.23

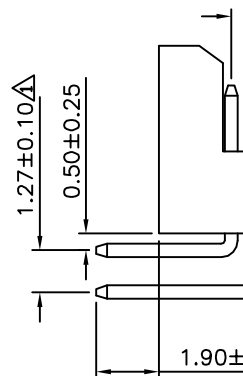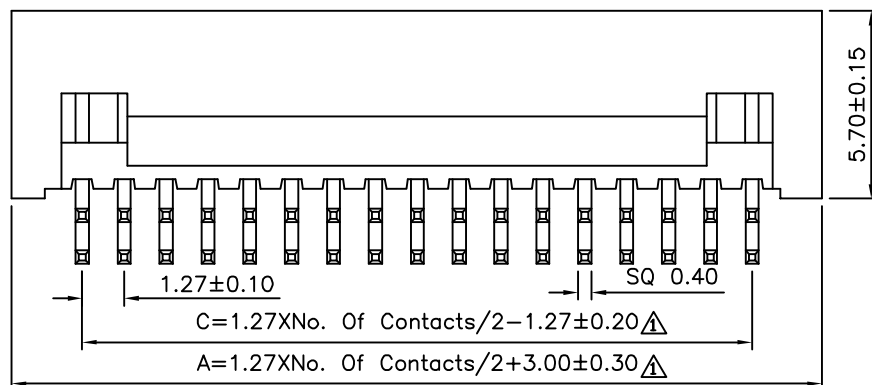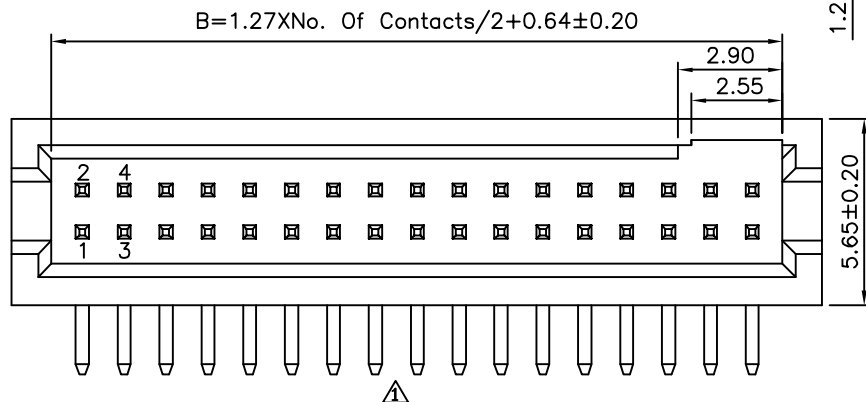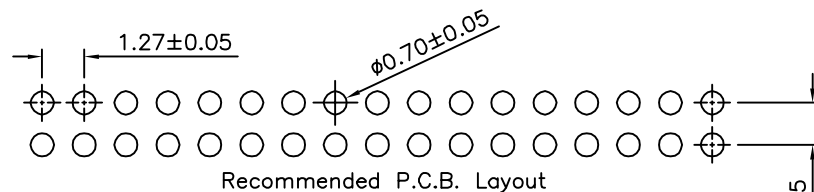

DRAWING No.

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A1

UNITS
 SPE
 TOL

UK
 mm

ISE

REVISIONS

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	04/07/2015
△	A0	NEW RELEASE	HZF	07/31/2014