

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:1 Amp

Withstand Voltage:500V AC/DC

Contact Resistance: 20 Milliohms Max.




Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Plated Over Nickel

Insulator:PA6T+30%G.F.(UL94V-0),Black

RoHS Compliant

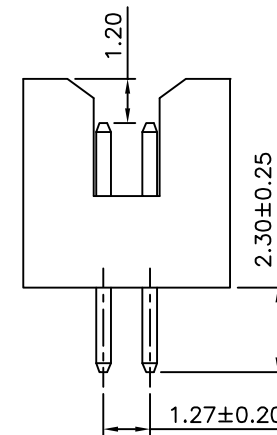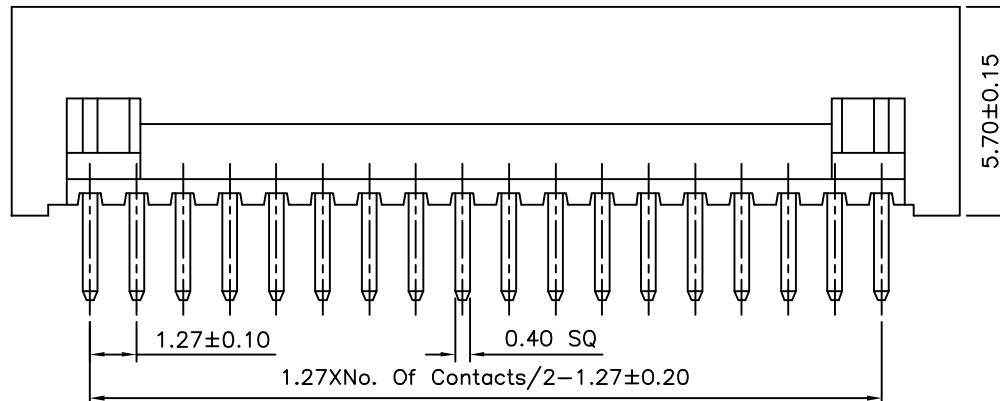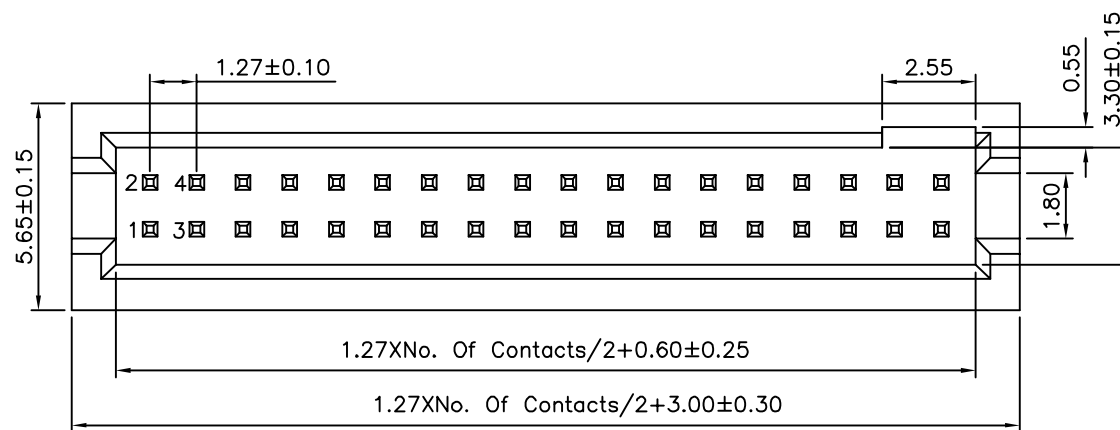

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

APPROVED BY

EMILY

CHECKED BY	
------------	--

HZF

DRAWING BY

SONG


SCALE

NONE

REV.

AO

UNLESS OTHERWISE SPECIFIED	TOLERANCES ARE
.X	± 0.40
.XX	± 0.25
.XXX	± 0.15
ANG.	$\pm 3^\circ$



AO	
NO.	REV.

	NEW RELEASE
--	-------------

REVISIONS

HZF

05/01/2011

CHK

	DATE
--	------