


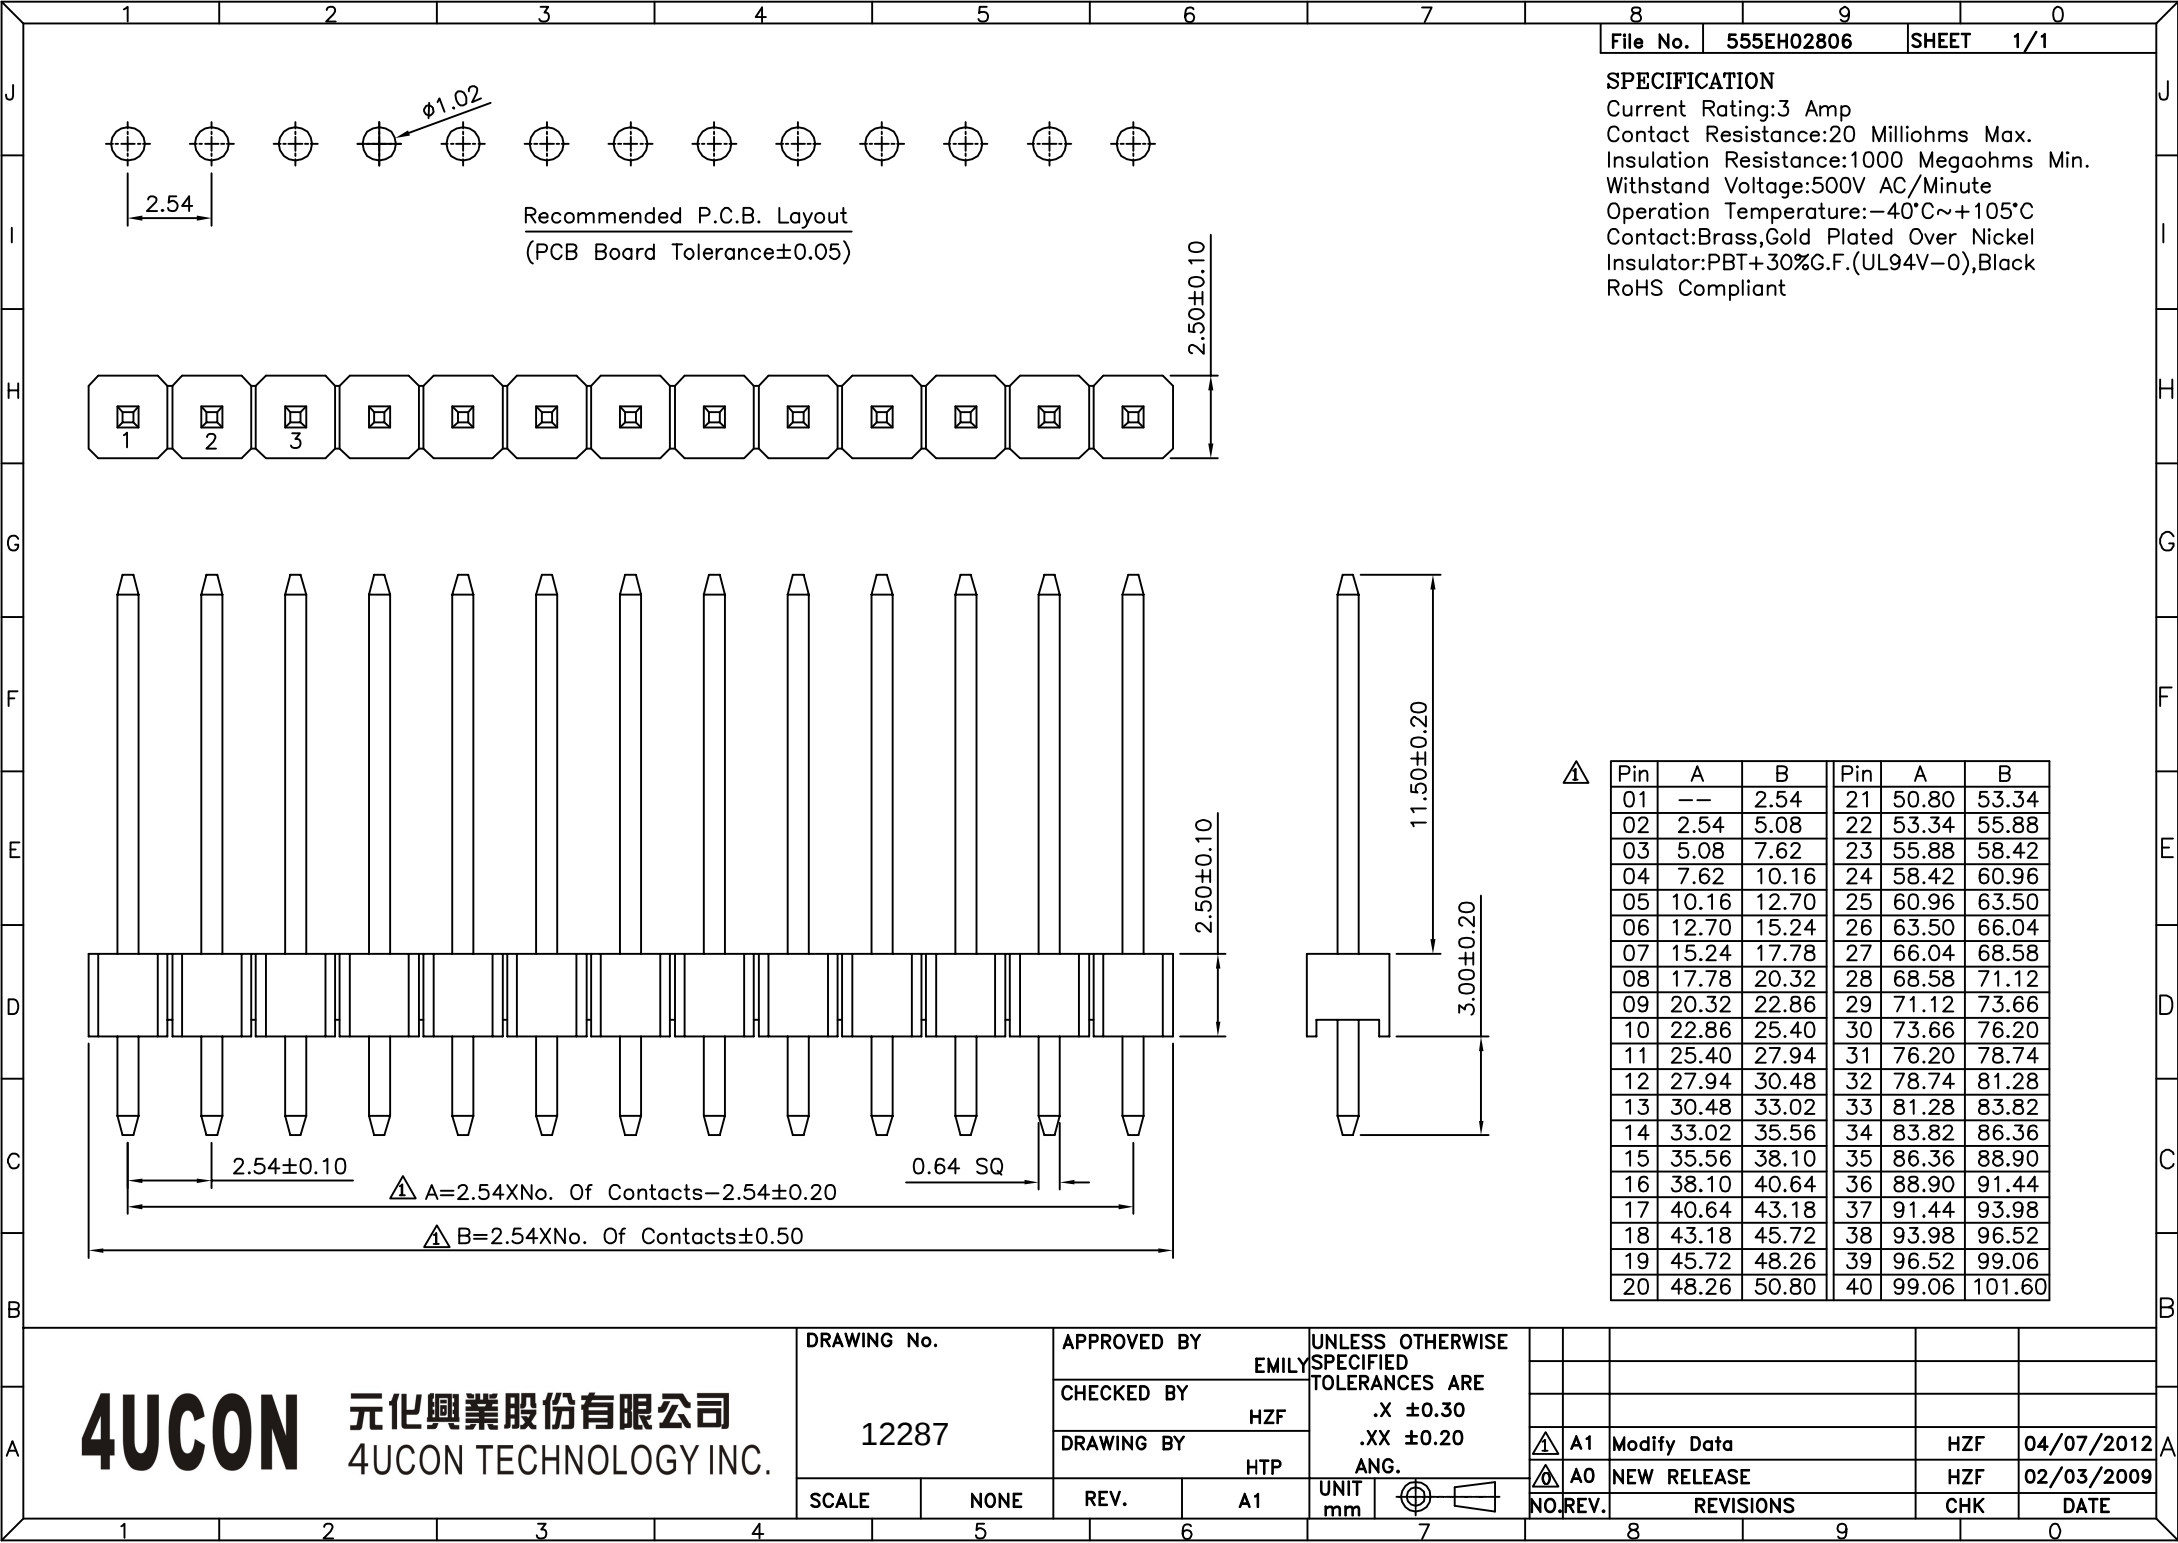

SPECIFICATION
Current Rating:3 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:500V AC/Minute
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V−0),Black
RoHS Compliant

△	Pin	A	B	Pin	A	B
	01	--	2.54	21	50.80	53.34
	02	2.54	5.08	22	53.34	55.88
	03	5.08	7.62	23	55.88	58.42
	04	7.62	10.16	24	58.42	60.96
	05	10.16	12.70	25	60.96	63.50
	06	12.70	15.24	26	63.50	66.04
	07	15.24	17.78	27	66.04	68.58
	08	17.78	20.32	28	68.58	71.12
	09	20.32	22.86	29	71.12	73.66
	10	22.86	25.40	30	73.66	76.20
	11	25.40	27.94	31	76.20	78.74
	12	27.94	30.48	32	78.74	81.28
	13	30.48	33.02	33	81.28	83.82
	14	33.02	35.56	34	83.82	86.36
	15	35.56	38.10	35	86.36	88.90
	16	38.10	40.64	36	88.90	91.44
	17	40.64	43.18	37	91.44	93.98
	18	43.18	45.72	38	93.98	96.52
	19	45.72	48.26	39	96.52	99.06
	20	48.26	50.80	40	99.06	101.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
12287		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		HTP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
ANG.
UNIT mm



△ A1	Modify Data		HZF	04/07/2012	
△ A0	NEW RELEASE		HZF	02/03/2009	
NO. REV.	REVISIONS	CHK	DATE		