

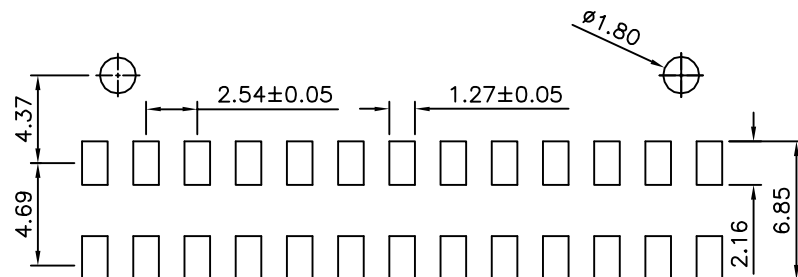
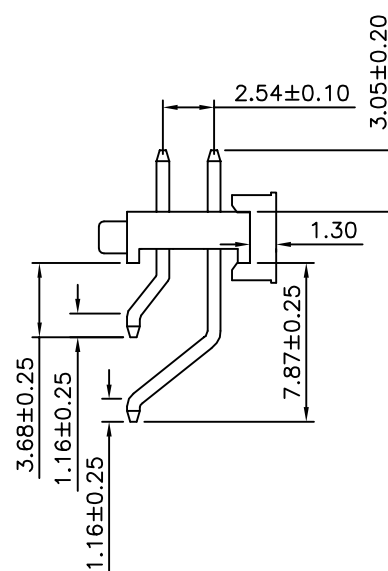


SPECIFICATION

Current Rating:3A
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-O),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

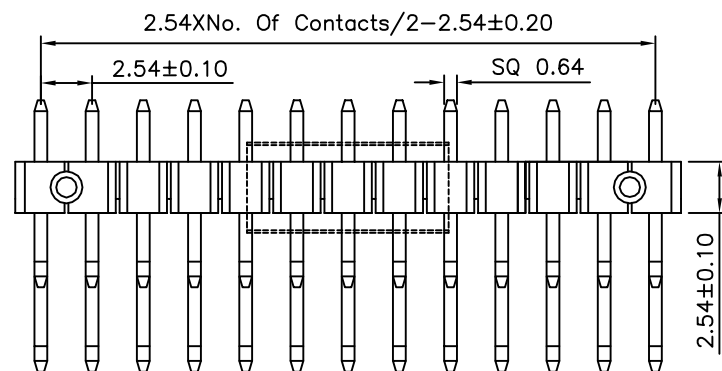

Recommended P.C.B. Layout

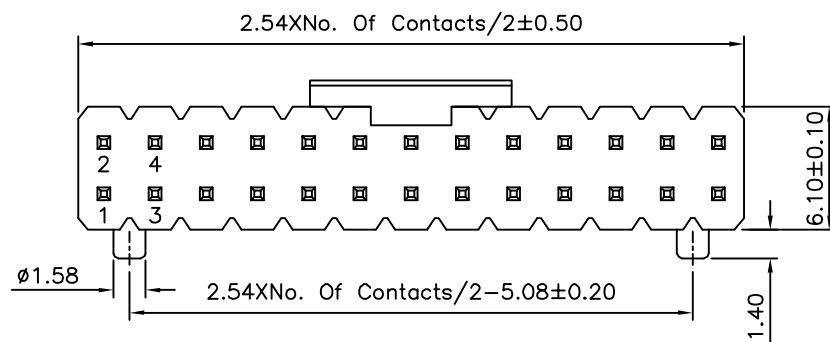

Pin	A	B	Pin	A	B
06	5.08	7.62	44	53.34	55.88
08	7.62	10.16	46	55.88	58.42
10	10.16	12.70	48	58.42	60.96
12	12.70	15.24	50	60.96	63.50
14	15.24	17.78	52	63.50	66.04
16	17.78	20.32	54	66.04	68.58
18	20.32	22.86	56	68.58	71.12
20	22.86	25.40	58	71.12	73.66
22	25.40	27.94	60	73.66	76.20
24	27.94	30.48	62	76.20	78.74
26	30.48	33.02	64	78.74	81.28
28	33.02	35.56	66	81.28	83.82
30	35.56	38.10	68	83.82	86.36
32	38.10	40.64	70	86.36	88.90
34	40.64	43.18	72	88.90	91.44
36	43.18	45.72	74	91.44	93.98
38	45.72	48.26	76	93.98	96.52
40	48.26	50.80	78	96.52	99.06
42	50.80	53.34	80	99.06	101.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12303

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SAN

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20

UNIT
 mm



NO. REV.

NEW RELEASE

HZF

01/11/2014

REVISIONS

CHK

DATE