

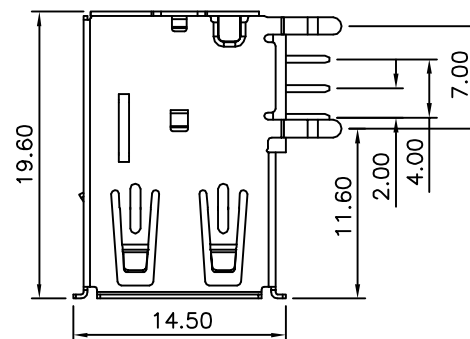

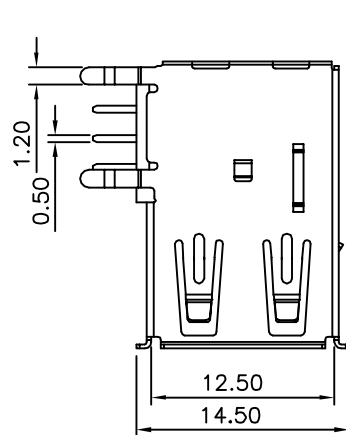


SPECIFICATION

Current Rating:1A
Dielectric Withstanding Voltage:500V AC RMS
Insulation Resistance:1000 Megaohms Min. At 500V DC
Operating Temperature:-40°C~+85°C
Contact Resistance:30 Milliohms Max.
Housing:PBT(UL94V-0)
12333:White
02974:Black
Cover:LCP(UL94V-0),Black
Contact:Brass
Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel
Shell:Brass,Nickel Plated
RoHS Compliant

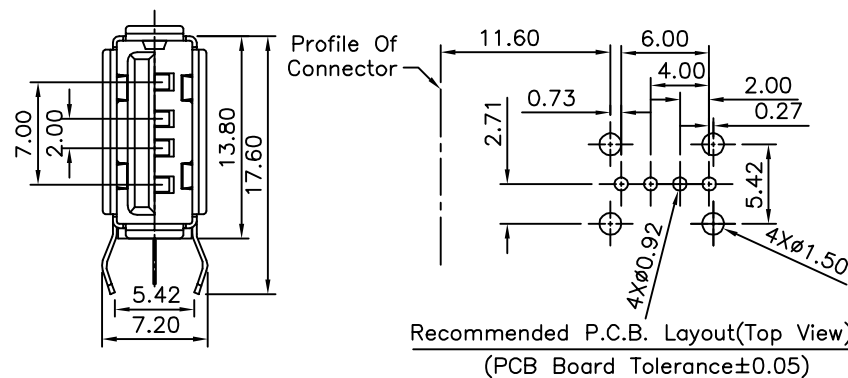

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12333

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
XX ± 0.38
XXX ± 0.25
ANG. $\pm 2^\circ$

UNIT
mm

NO. REV.

A0 NEW RELEASE
REVISIONSHZF
CHK05/27/2015
DATE