


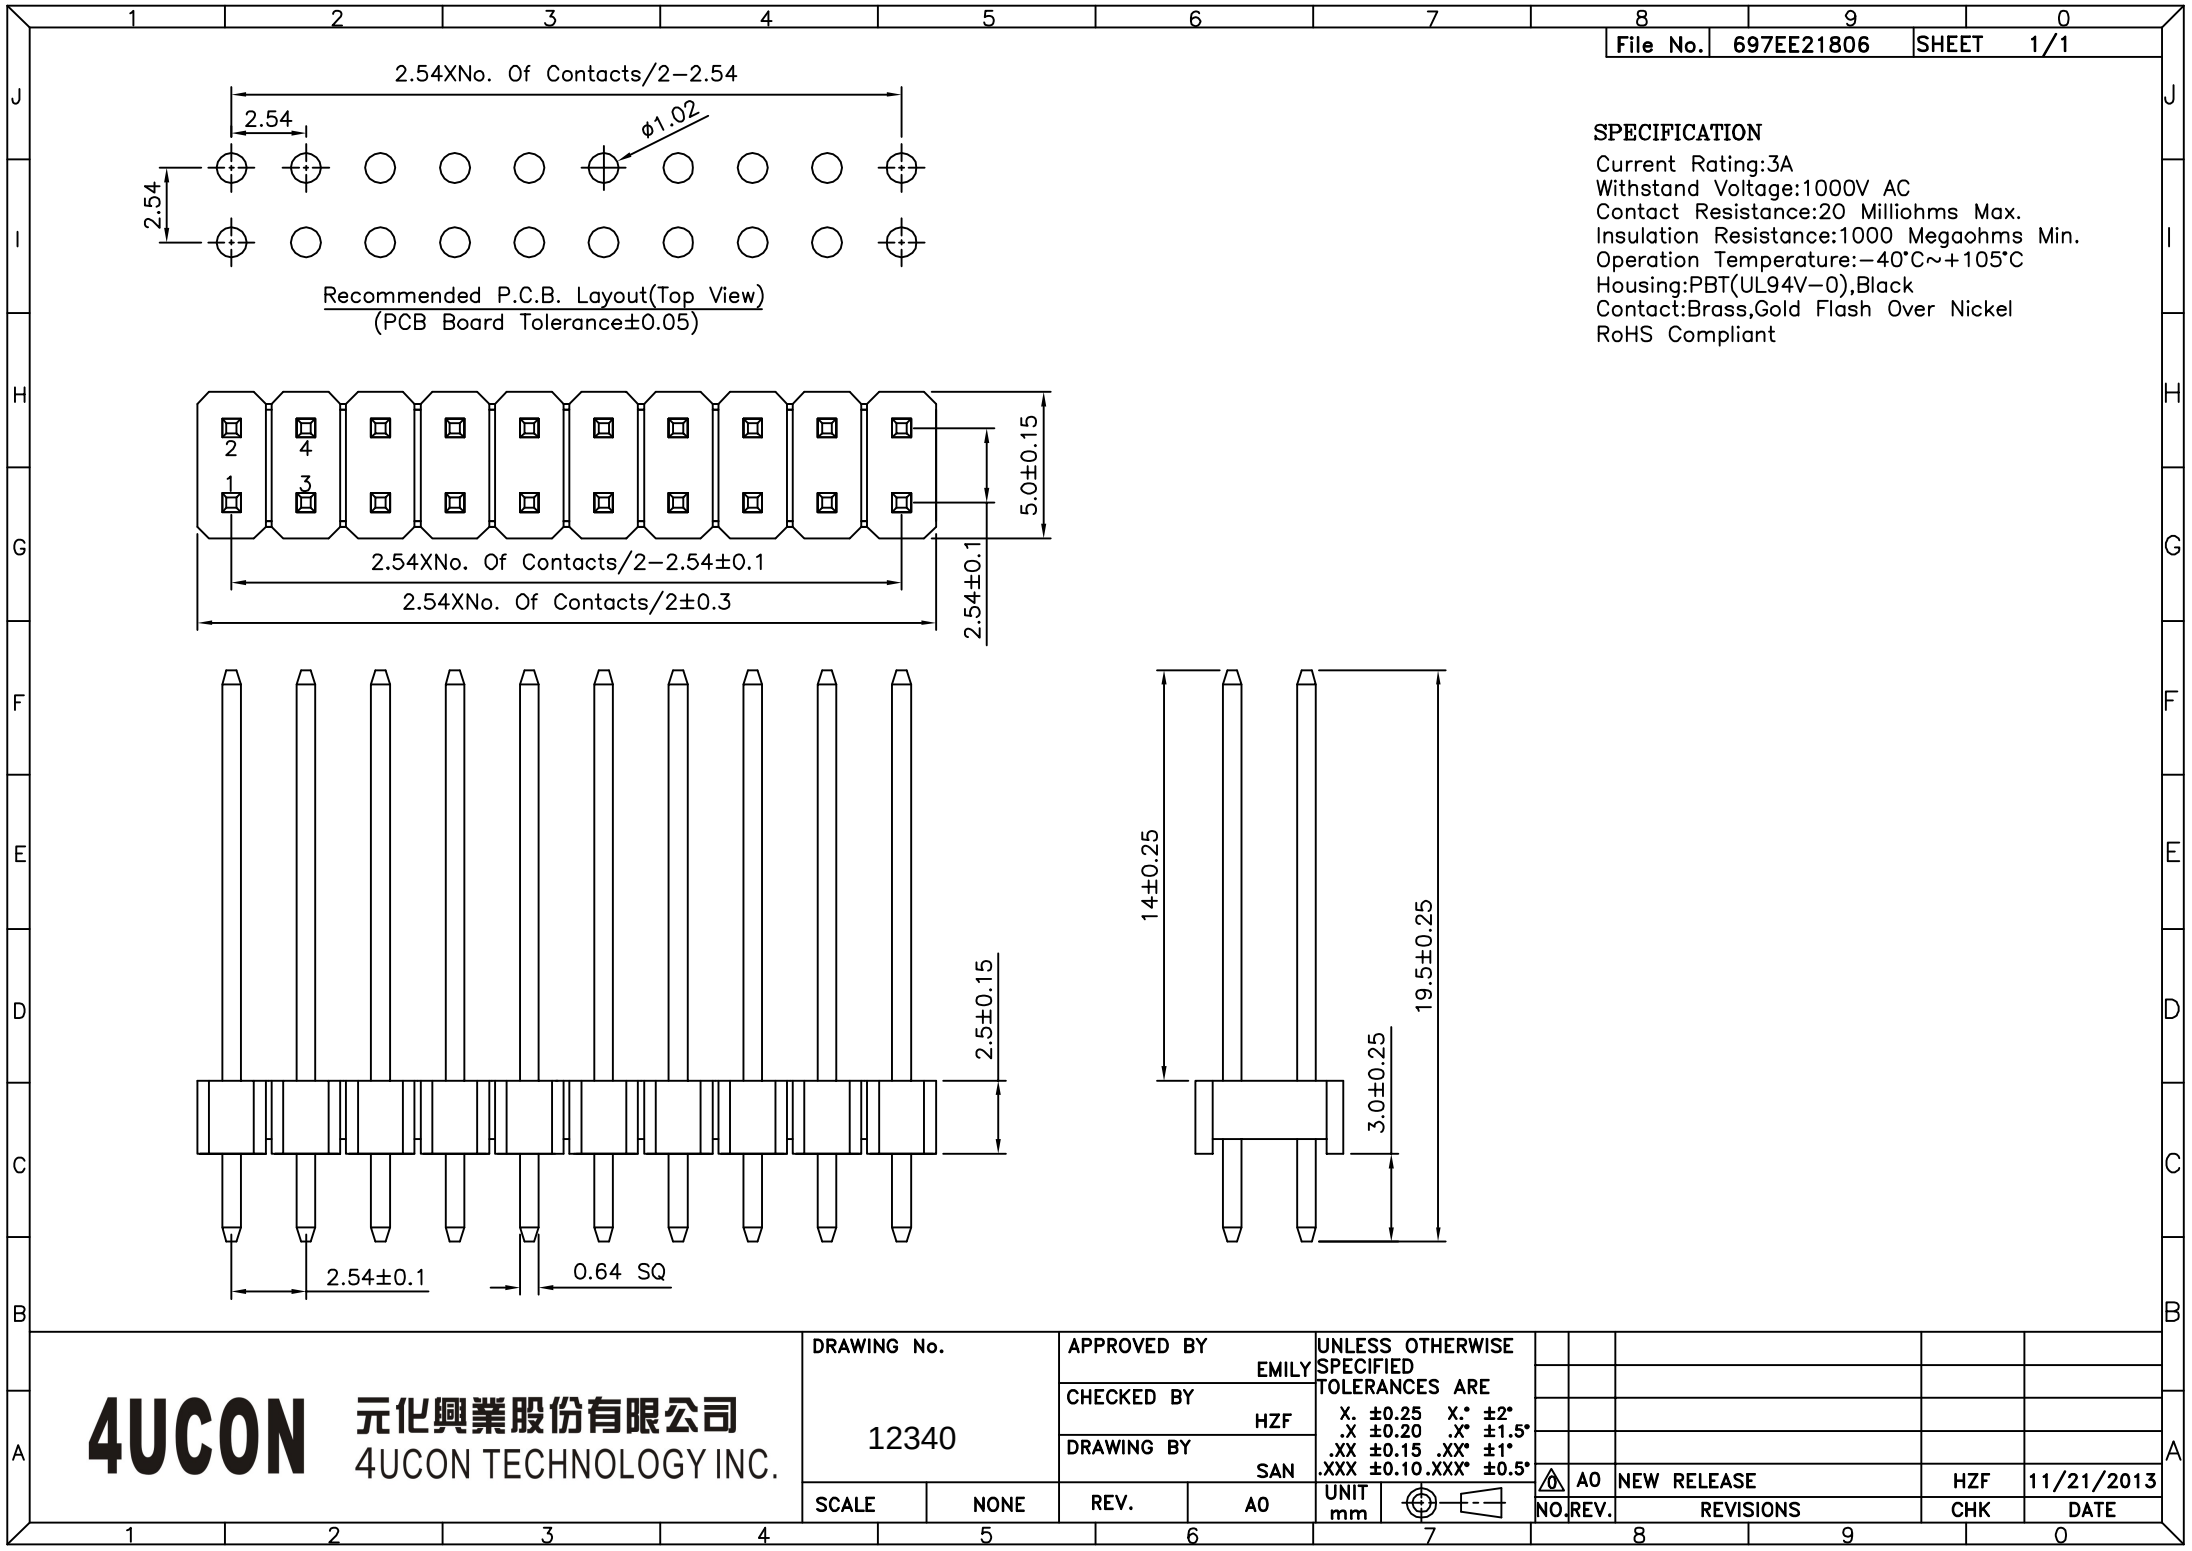

**SPECIFICATION**  
Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Housing:PBT(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |
|-------------|------|-------------|----|
| DRAWING No. |      | APPROVED BY |    |
| 12340       |      | EMILY       |    |
|             |      | CHECKED BY  |    |
|             |      | HZF         |    |
|             |      | DRAWING BY  |    |
|             |      | SAN         |    |
| SCALE       | NONE | REV.        | A0 |

|                                           |    |     |      |           |             |      |            |
|-------------------------------------------|----|-----|------|-----------|-------------|------|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |    |     |      |           |             |      |            |
| X. $\pm 0.25$ X.* $\pm 2^\circ$           |    |     |      |           |             |      |            |
| .X $\pm 0.20$ .X* $\pm 1.5^\circ$         |    |     |      |           |             |      |            |
| .XX $\pm 0.15$ .XX* $\pm 1^\circ$         |    |     |      |           |             |      |            |
| .XXX $\pm 0.10$ .XXX* $\pm 0.5^\circ$     |    |     |      |           |             |      |            |
| UNIT                                      | mm | NO. | REV. | A0        | NEW RELEASE | HZF  | 11/21/2013 |
|                                           |    |     |      | REVISIONS | CHK         | DATE |            |