

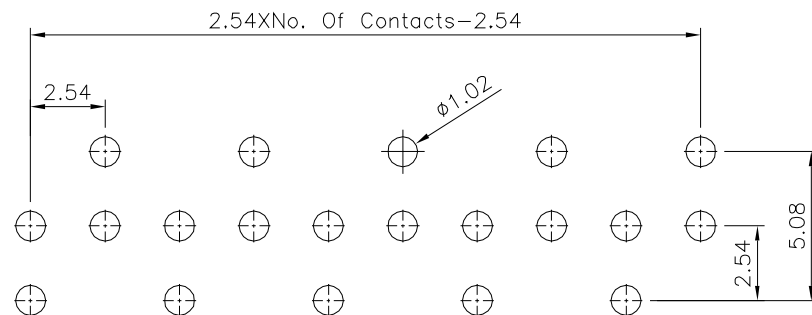




Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

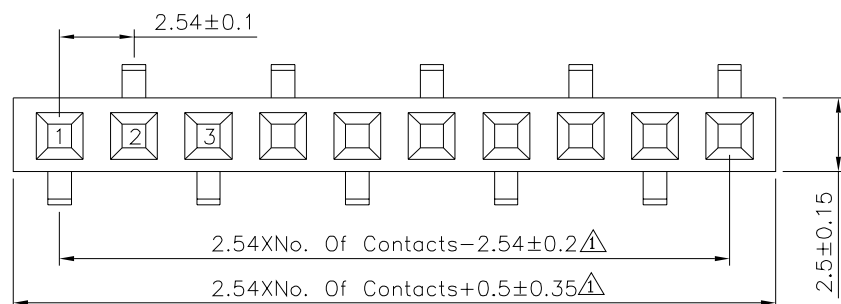

SPECIFICATION

Current Rating:3A
 Δ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12581

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
mm



Δ

A1

Modify Data

Δ

A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

Δ

A1

Modify Data

Δ

A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE