

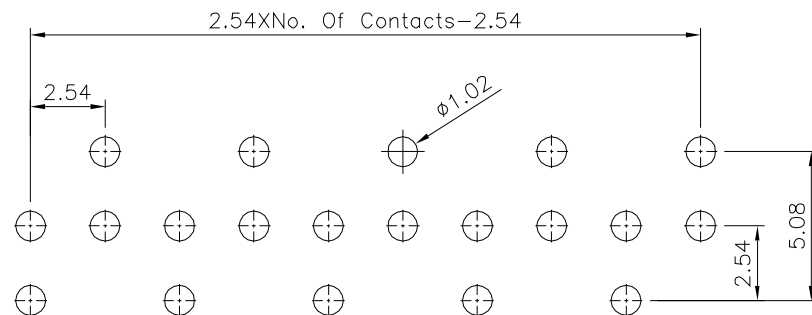



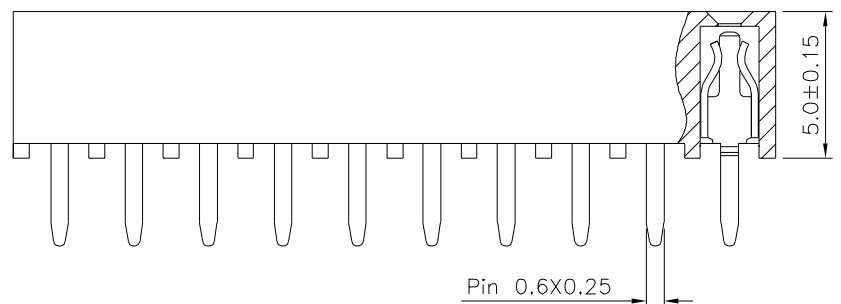

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

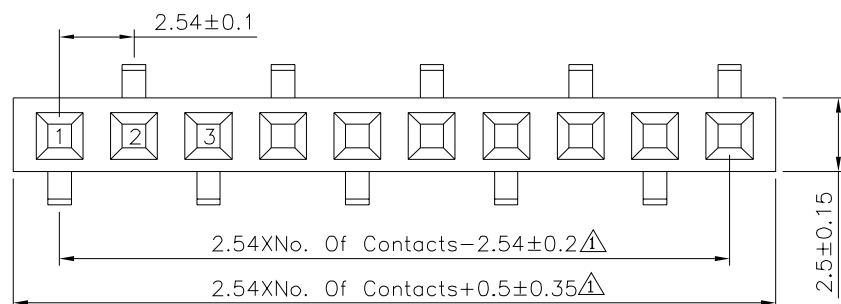

SPECIFICATION

Current Rating:3A
 Δ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
 Housing:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12586

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

SCALE

NONE


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
mm



5*				
5*		A1 Modify Data	HZF	07/26/2021
		A0 NEW RELEASE	HZF	11/19/2013
	NO.REV.	REVISIONS	CHK	DATE