
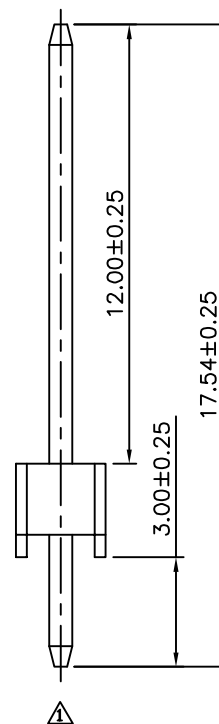
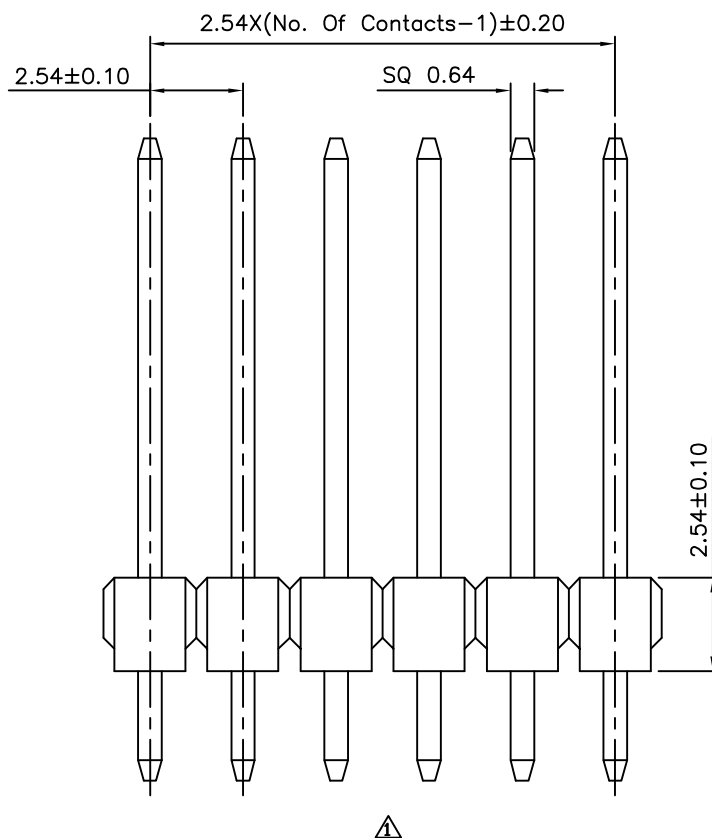
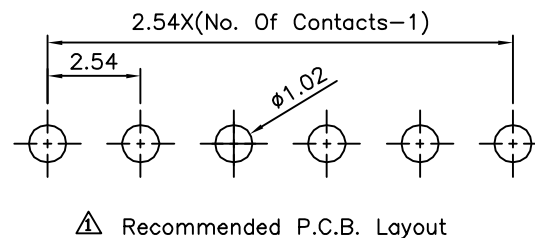


△ SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

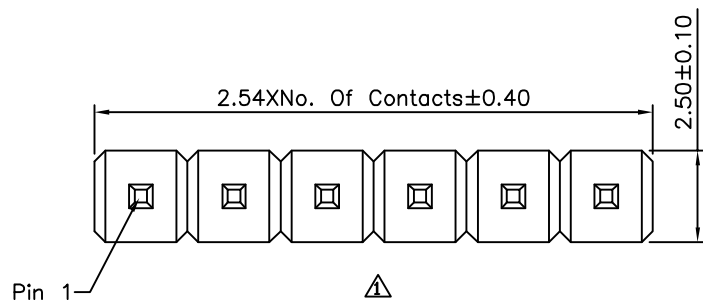

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12597

APPROVED BY
 EMILY

CHECKED BY
 HZF

DRAWING BY
 SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ .X ±0.38
 .XX ±0.25
 ANG. ±5°


SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Data	HZF	03/02/2013
△ A0	NEW RELEASE		