


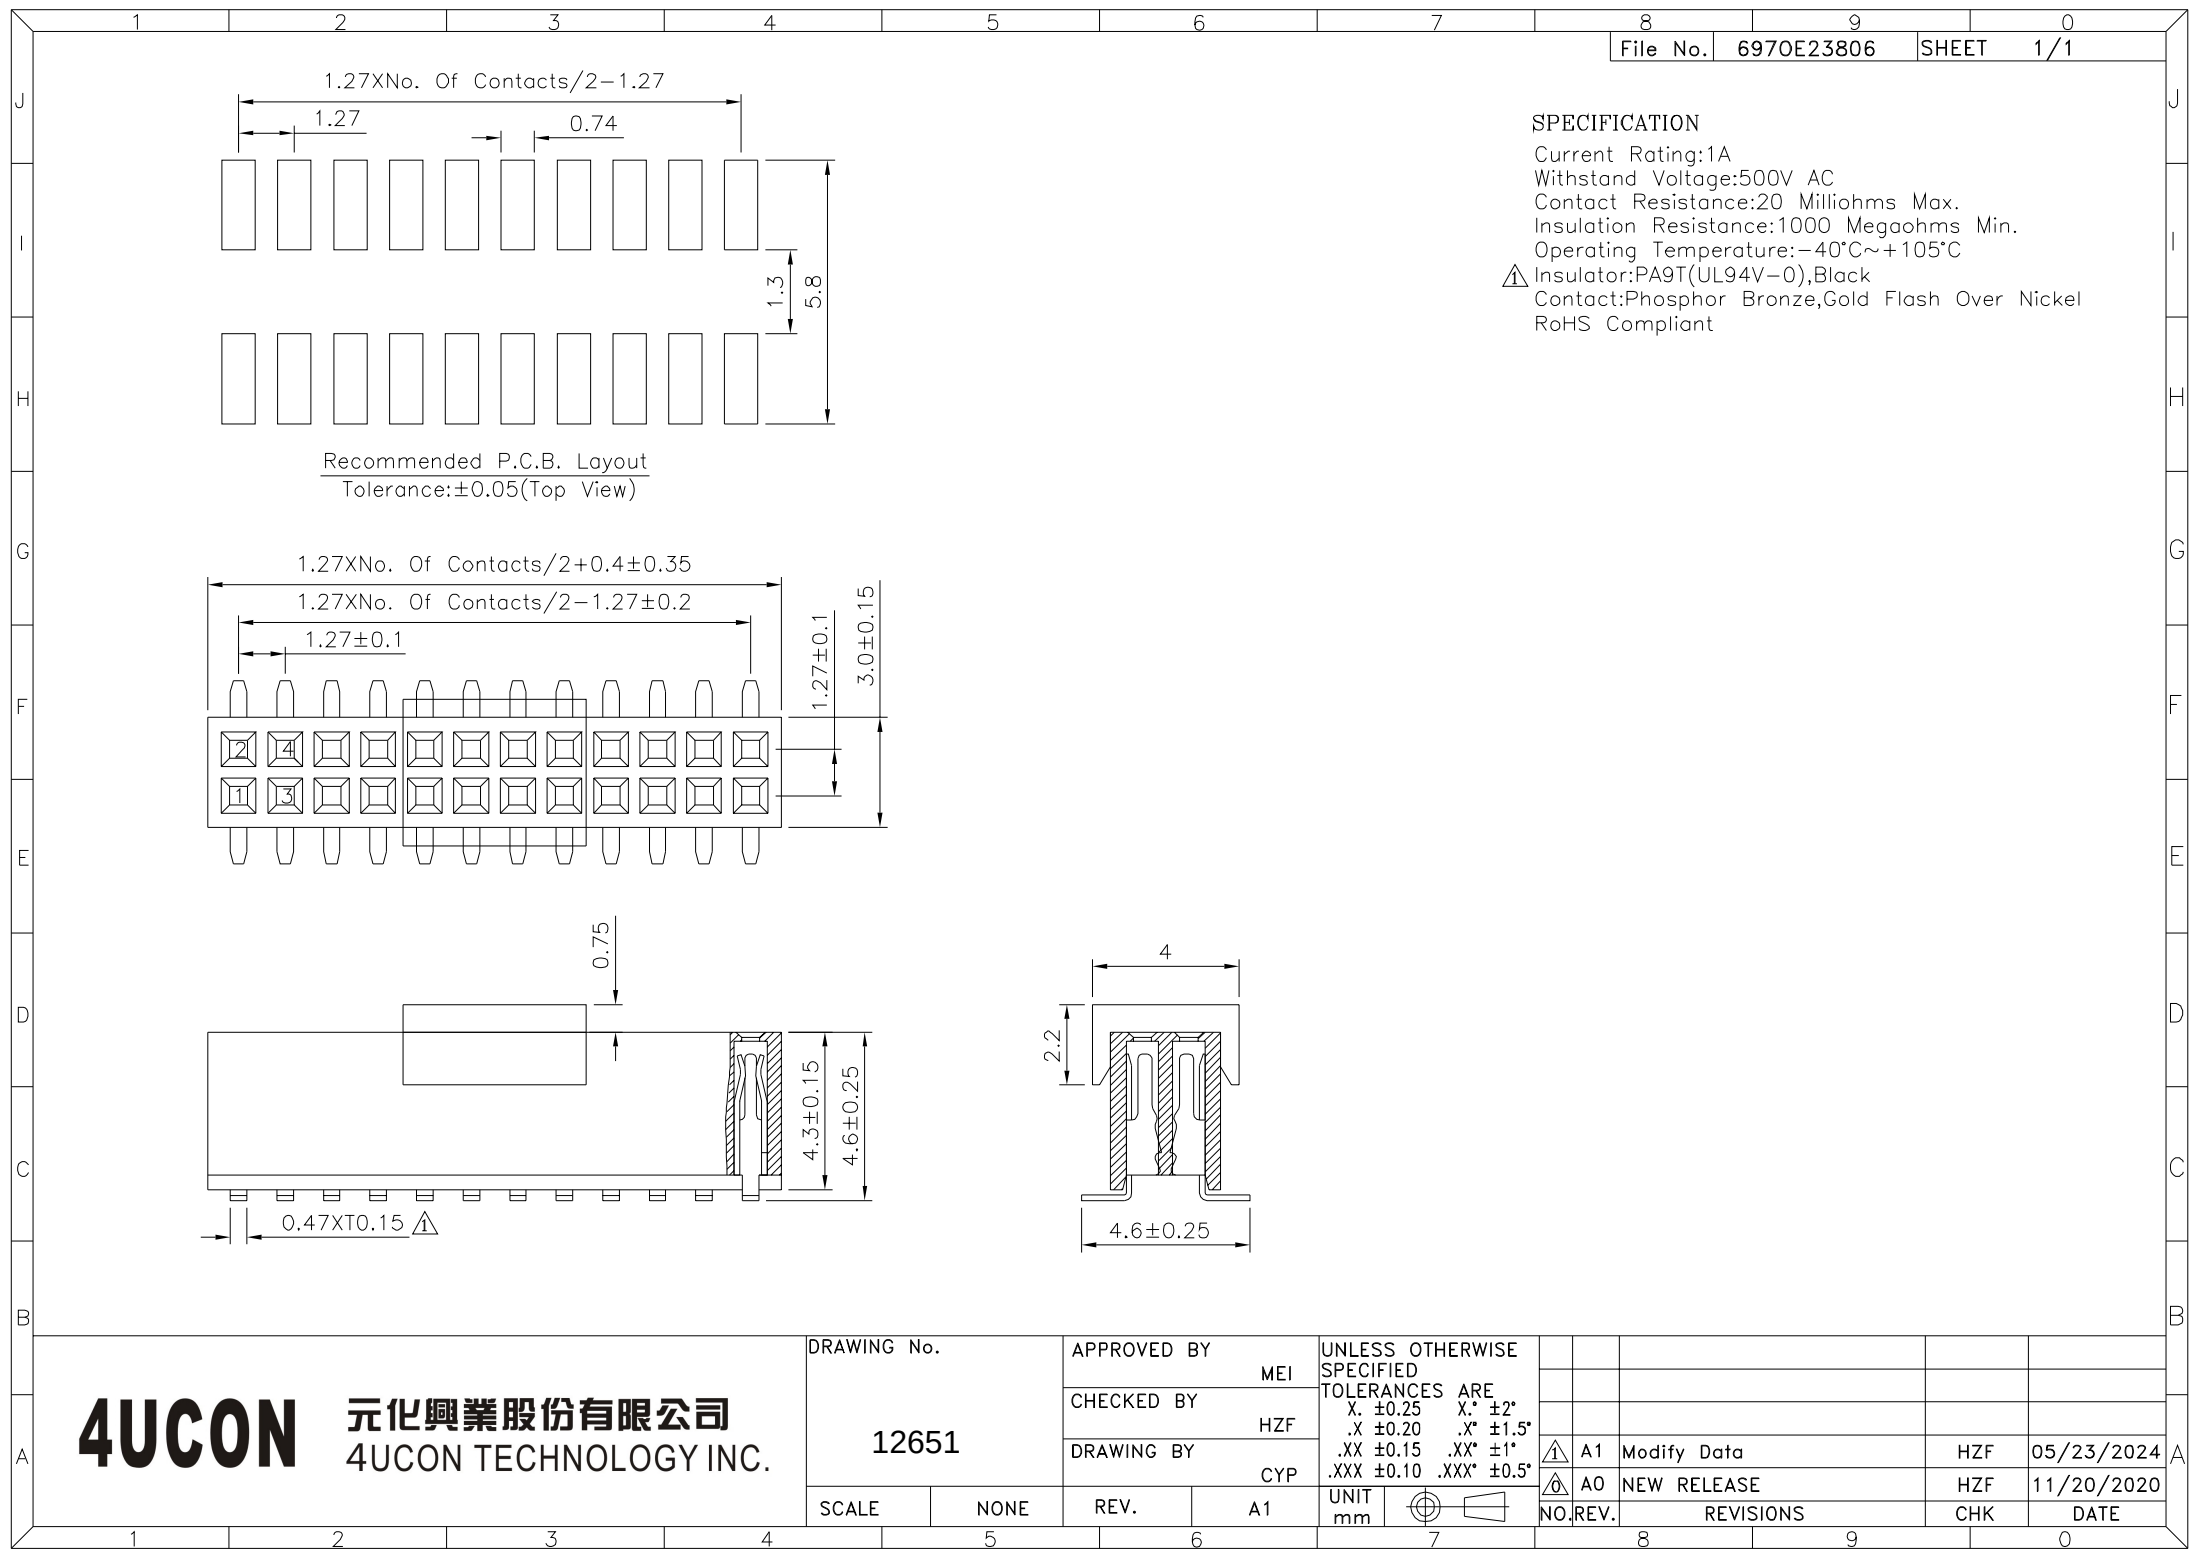

SPECIFICATION
Current Rating:1A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 12651		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2" .X ±0.20 .X* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"					
		CHECKED BY HZF							
		DRAWING BY CYP			⚠ A1	Modify Data	HZF	05/23/2024	
					⚠ A0	NEW RELEASE	HZF	11/20/2020	
SCALE	NONE	REV.	A1	UNIT mm		NO. REV.	REVISIONS	CHK	DATE