

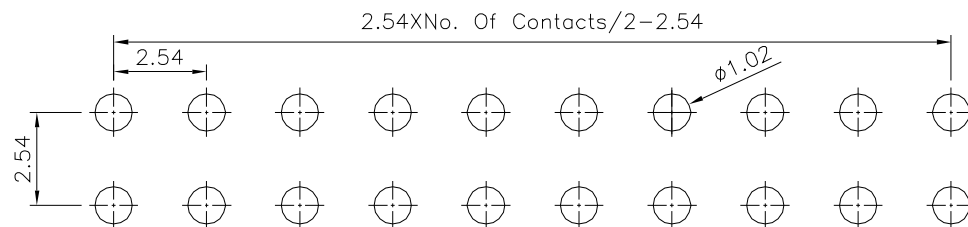



SPECIFICATION

- Current Rating:3 Amps
- Withstanding Voltage:1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Housing:PA6T(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Flash Over Nickel
- RoHS Compliant

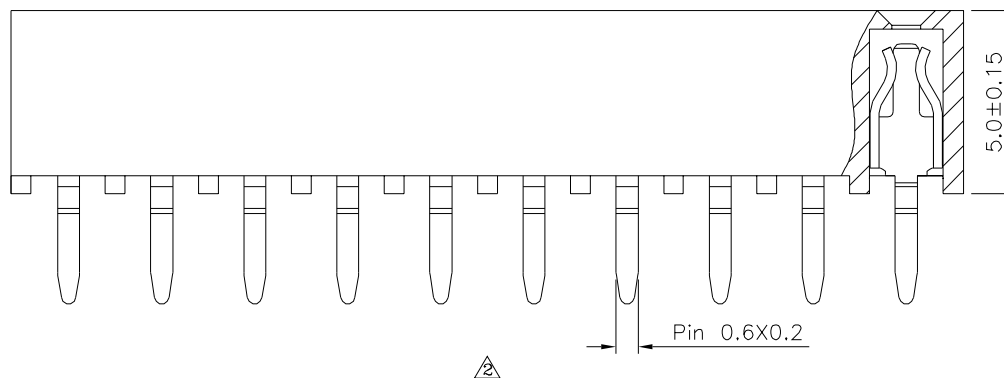

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

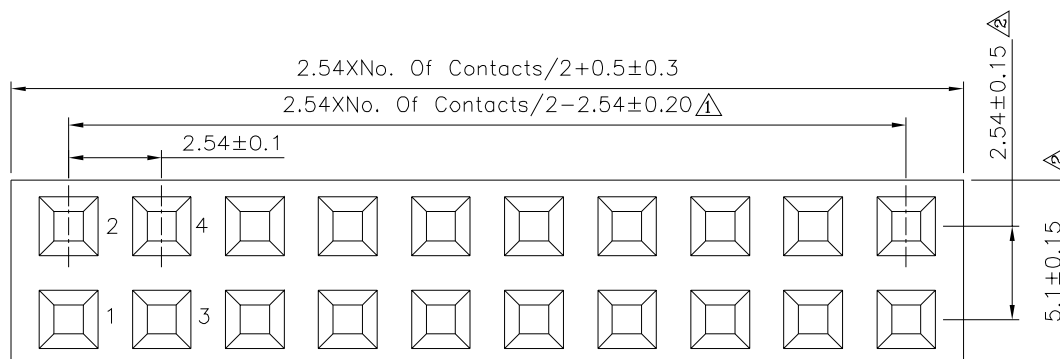

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12777

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2°
.X ±0.20 .X* ±1.5°
.XX ±0.15 .XX* ±1°
.XXX ±0.10 .XXX* ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△A2	A2	Modify Data	HZF	08/13/2019
△A1	A1	Modify Data	HZF	04/21/2015
△A0	A0	NEW RELEASE	HZF	07/03/2013