

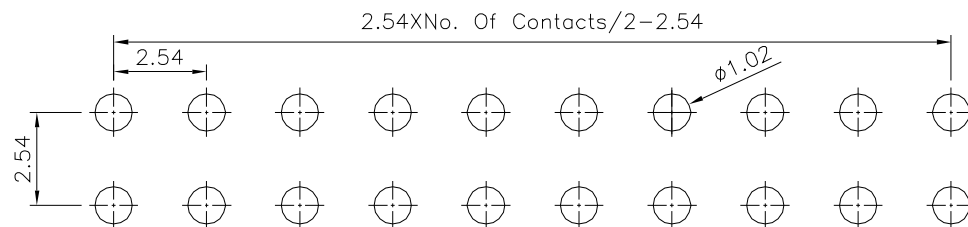



# SPECIFICATION

- Current Rating:3 Amps
- Withstanding Voltage:1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Housing:PA6T(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Flash Over Nickel
- RoHS Compliant

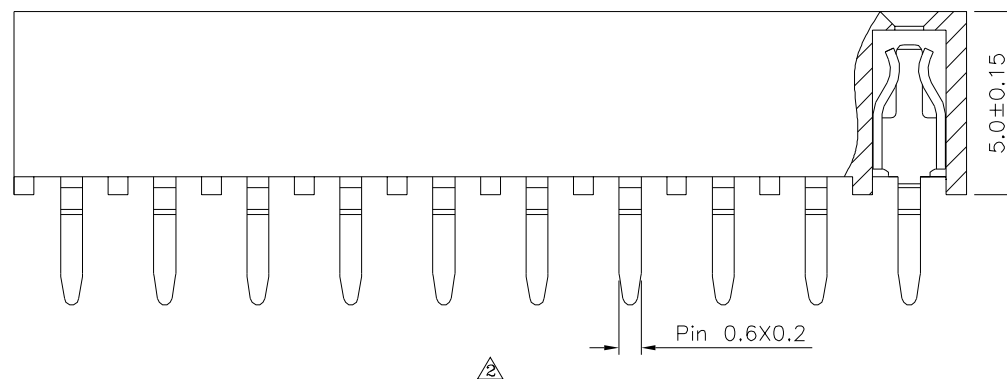

Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

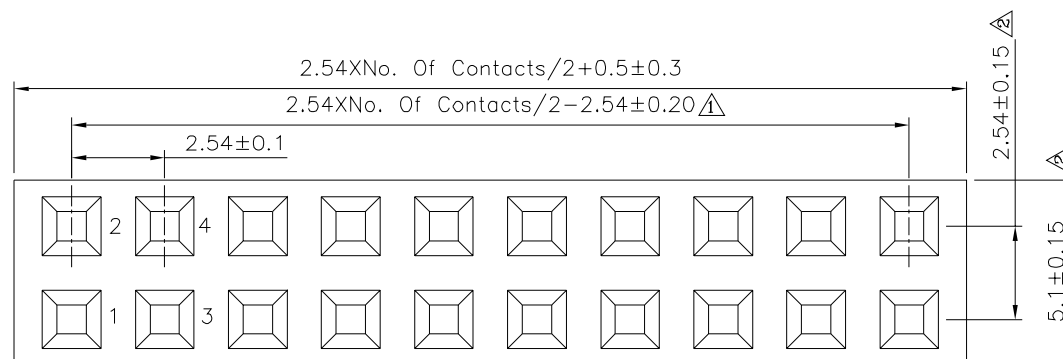

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

12782

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.25 X.\* ±2°  
.X ±0.20 .X\* ±1.5°  
.XX ±0.15 .XX\* ±1°  
.XXX ±0.10 .XXX\* ±0.5°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A2   | Modify Data | HZF | 08/13/2019 |
| △   | A1   | Modify Data | HZF | 04/21/2015 |
| △   | A0   | NEW RELEASE | HZF | 07/03/2013 |