

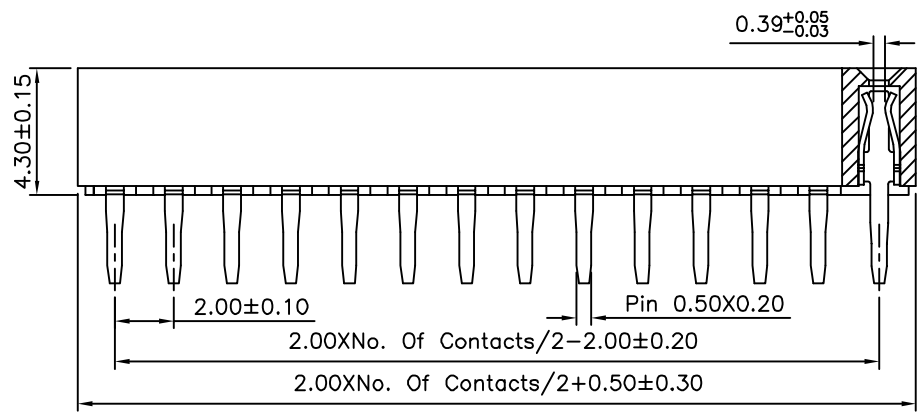


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

△ SPECIFICATION

- Current Rating:2.0 Amp
- Withstand Voltage:500V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C
- △ Insulator:PA9T+30%G.F.(UL94V-0),Black
- Contact:Phosphor Bronze,Gold Plated Over Nickel
- RoHS Compliant

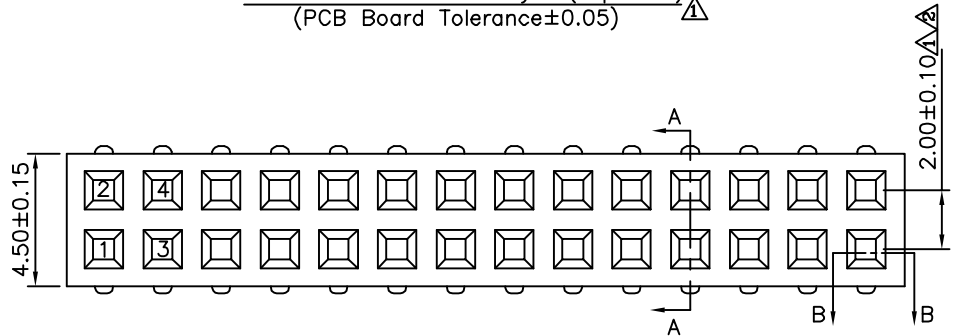

△△ Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°	△ A4	Modify Dim.	HZF	09/24/2015			
12815		EMILY			△ A3	Modify Data	HZF	11/27/2014			
		CHECKED BY			HZF		△ A2	Modify Data	HZF	10/11/2012	
SCALE		NONE		DRAWING BY		HAO		△ A1	Modify Data	HZF	08/18/2011
REV.		A4		UNIT		mm		△ A0	NEW RELEASE	BECKY	11/04/2005
NO.		REV.		REVISIONS		CHK		DATE			

NO.	REV.	REVISIONS	CHK	DATE