
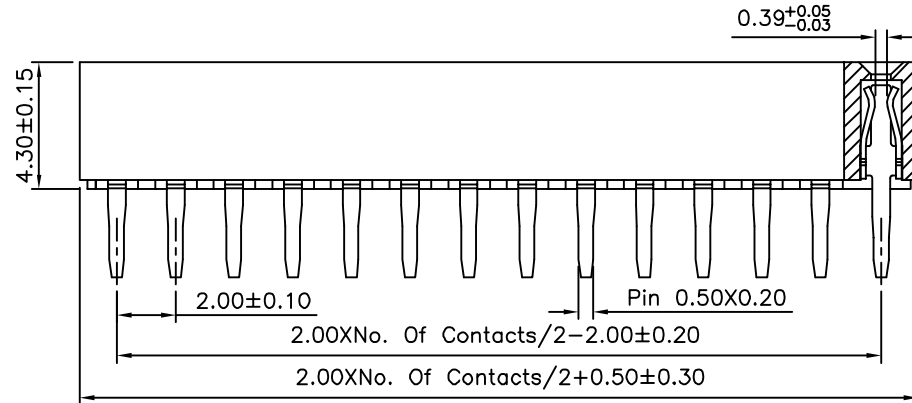



Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

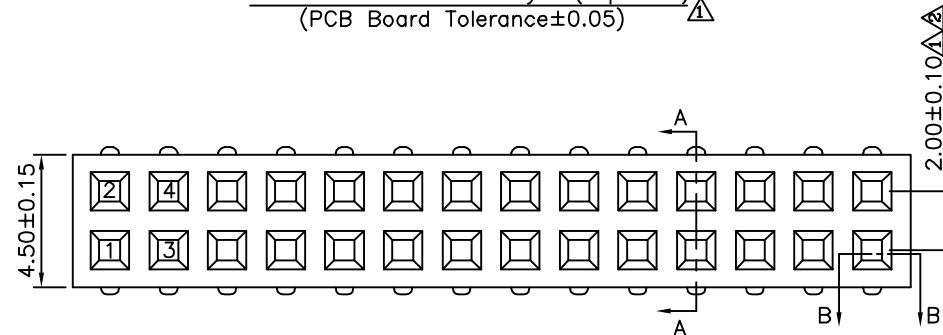

Section B-B



Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12841

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A4

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ± 0.40

.XX ± 0.25

.XXX ± 0.15

ANG. $\pm 3^\circ$

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

A4 Modify Dim.

A3 Modify Data

A2 Modify Data

A1 Modify Data

A0 NEW RELEASE

BECKY

11/04/2005

HZF

HZF

HZF

HZF

BECKY

11/04/2005

DATE

09/24/2015

11/27/2014

10/11/2012

08/18/2011

11/04/2005