
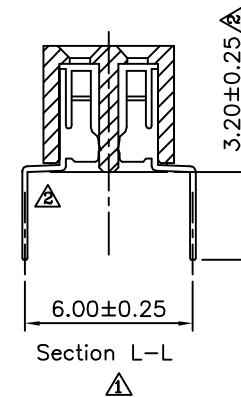
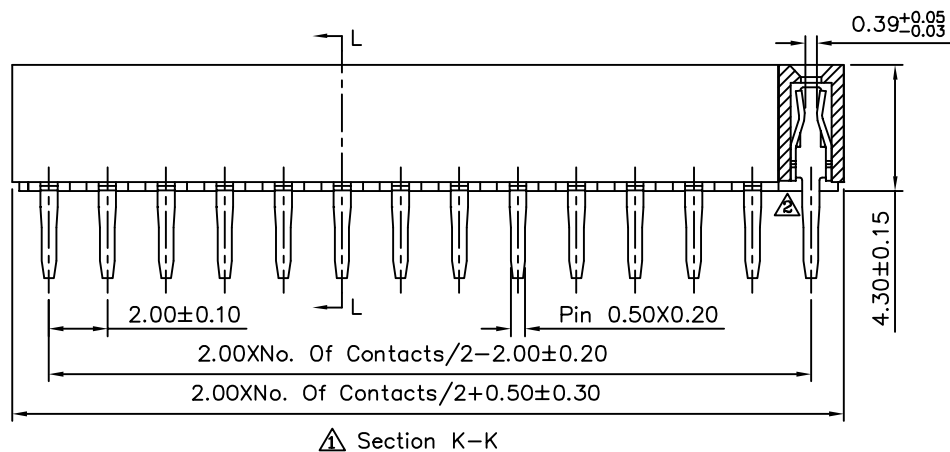


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

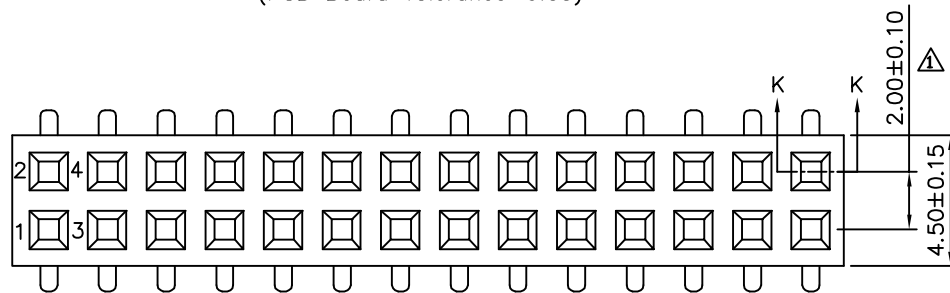

SPECIFICATION
 Current Rating:2.0 Amp
 Dielectric Withstanding:500V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operating Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 12871		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°							
		MEI									
		CHECKED BY									
		HZF									
DRAWING BY		HAO				⚠ A2	Modify Data		HZF	09/24/2015	
						⚠ A1	Modify Data		HZF	10/08/2012	
						⚠ A0	NEW RELEASE		HZF	01/04/2009	
SCALE	NONE	REV.	A2	UNIT		NO.	REV.	REVISIONS	CHK	DATE	
	5		6	mm	7		8	9		0	