

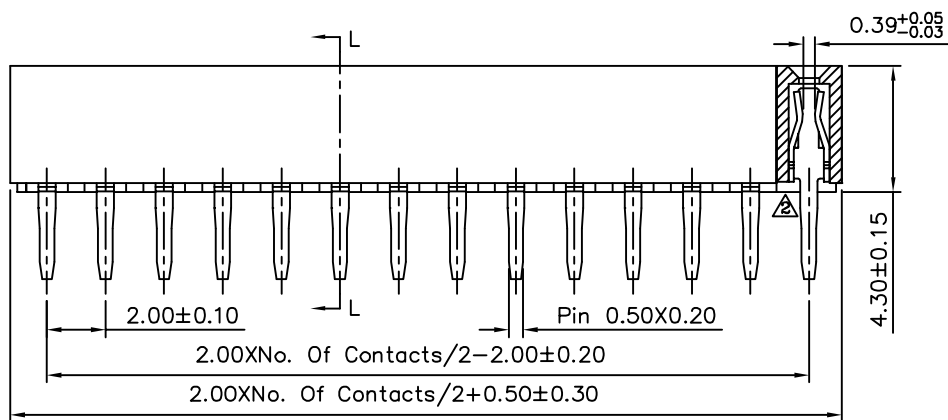


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

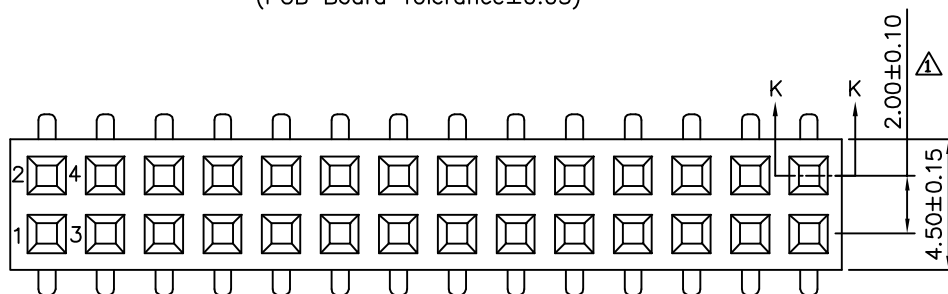

Section K-K



Section L-L

SPECIFICATION
 Current Rating:2.0 Amp
 Dielectric Withstanding:500V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operating Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12873

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^{\circ}$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	09/24/2015
A1		Modify Data	HZF	10/08/2012
A0		NEW RELEASE	HZF	01/04/2009