

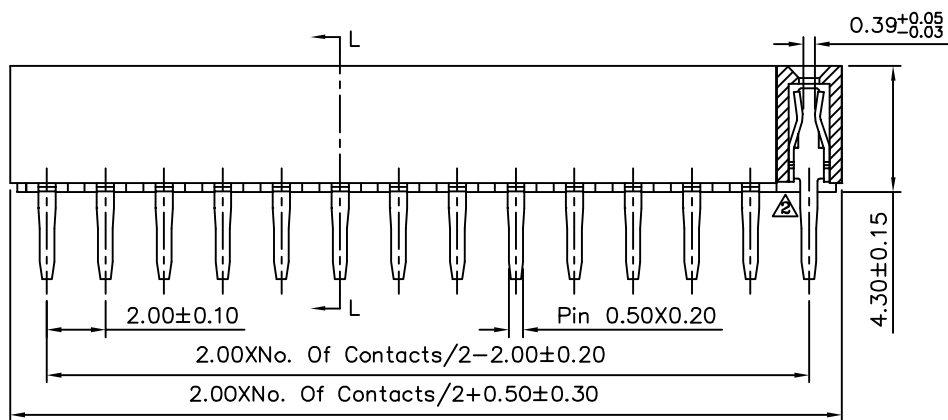


Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance $\pm 0.05$ )

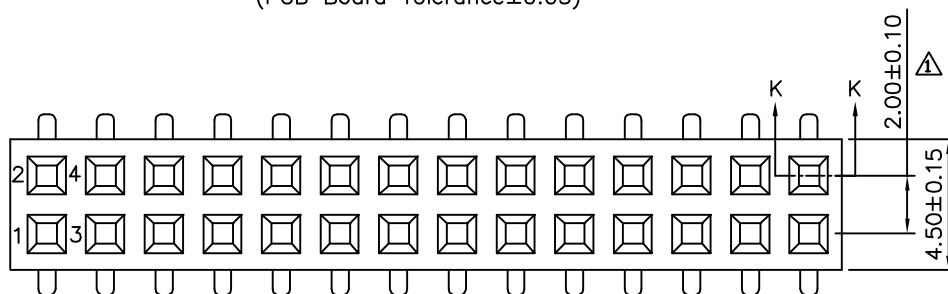

Section K-K



Section L-L

**SPECIFICATION**  
 Current Rating:2.0 Amp  
 Dielectric Withstanding:500V AC/DC  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Operating Temperature:-40°C~+105°C  
 Contact:Phosphor Bronze,Gold Plated Over Nickel  
 Insulator:PA9T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

12874

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X  $\pm 0.40$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.15$   
ANG.  $\pm 3^\circ$

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 09/24/2015 |
| A1  |      | Modify Data | HZF | 10/08/2012 |
| A0  |      | NEW RELEASE | HZF | 01/04/2009 |