

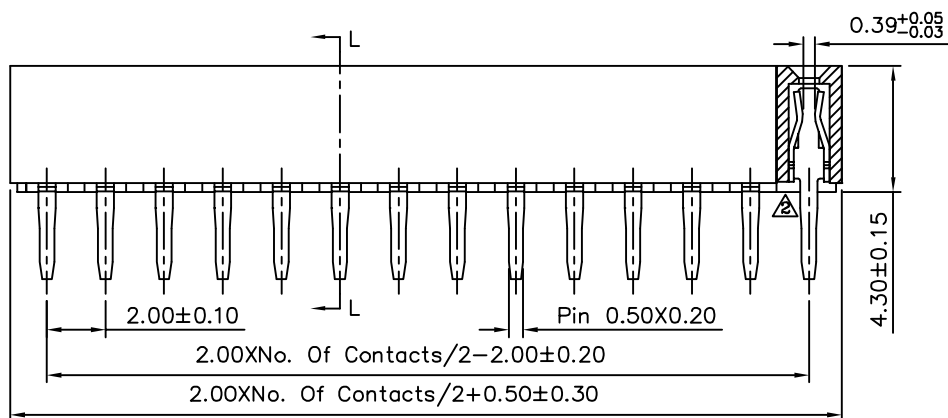


Recommended P.C.B. Layout(Top Side) Δ
(PCB Board Tolerance ± 0.05)

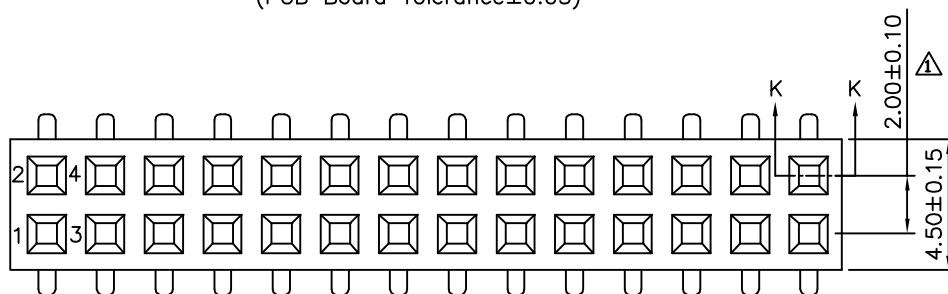

Δ Section K-K

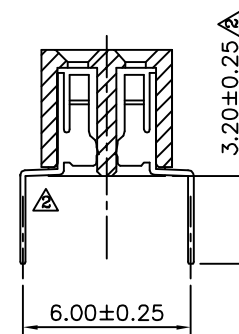

Section L-L

Δ

SPECIFICATION

Current Rating:2.0 Amp
Dielectric Withstanding:500V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operating Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
 Δ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12877

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



	A2	Modify Data	HZF	09/24/2015
	A1	Modify Data	HZF	10/08/2012
	A0	NEW RELEASE	HZF	01/04/2009
NO.REV.	REVISIONS		CHK	DATE