





**△△ SPECIFICATION**  
 Current:3A  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Withstanding Voltage:1000V AC/Minute  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~80 Contacts  
 RoHS Compliant

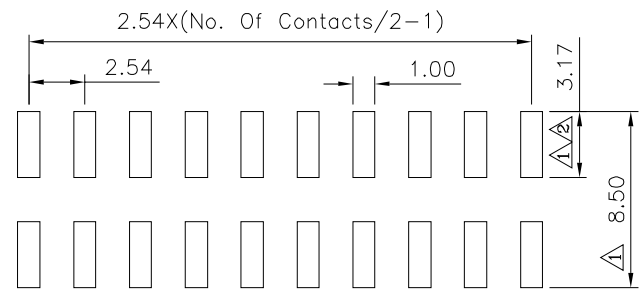

Recommended P.C.B Layout

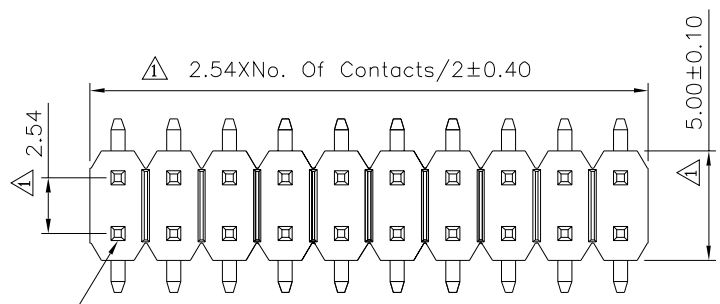

△ Pin 1

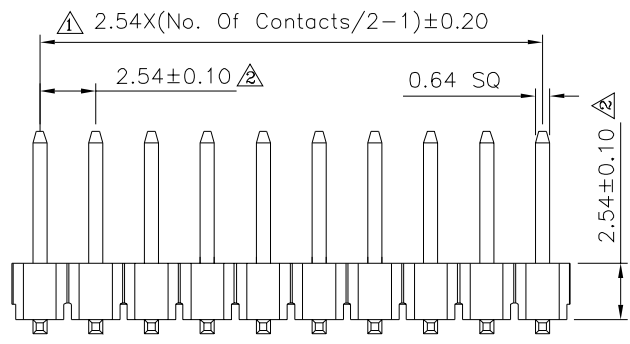

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 .XXX ±0.05
13035		MEI		
		CHECKED BY	HZF	
		DRAWING BY	WSS	
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	12/22/2022
△2	A2	Modify Data	HZF	08/31/2011
△1	A1	Modify Data	HZF	11/25/2009
△0	A0	NEW RELEASE	SHIN	03/13/2006