


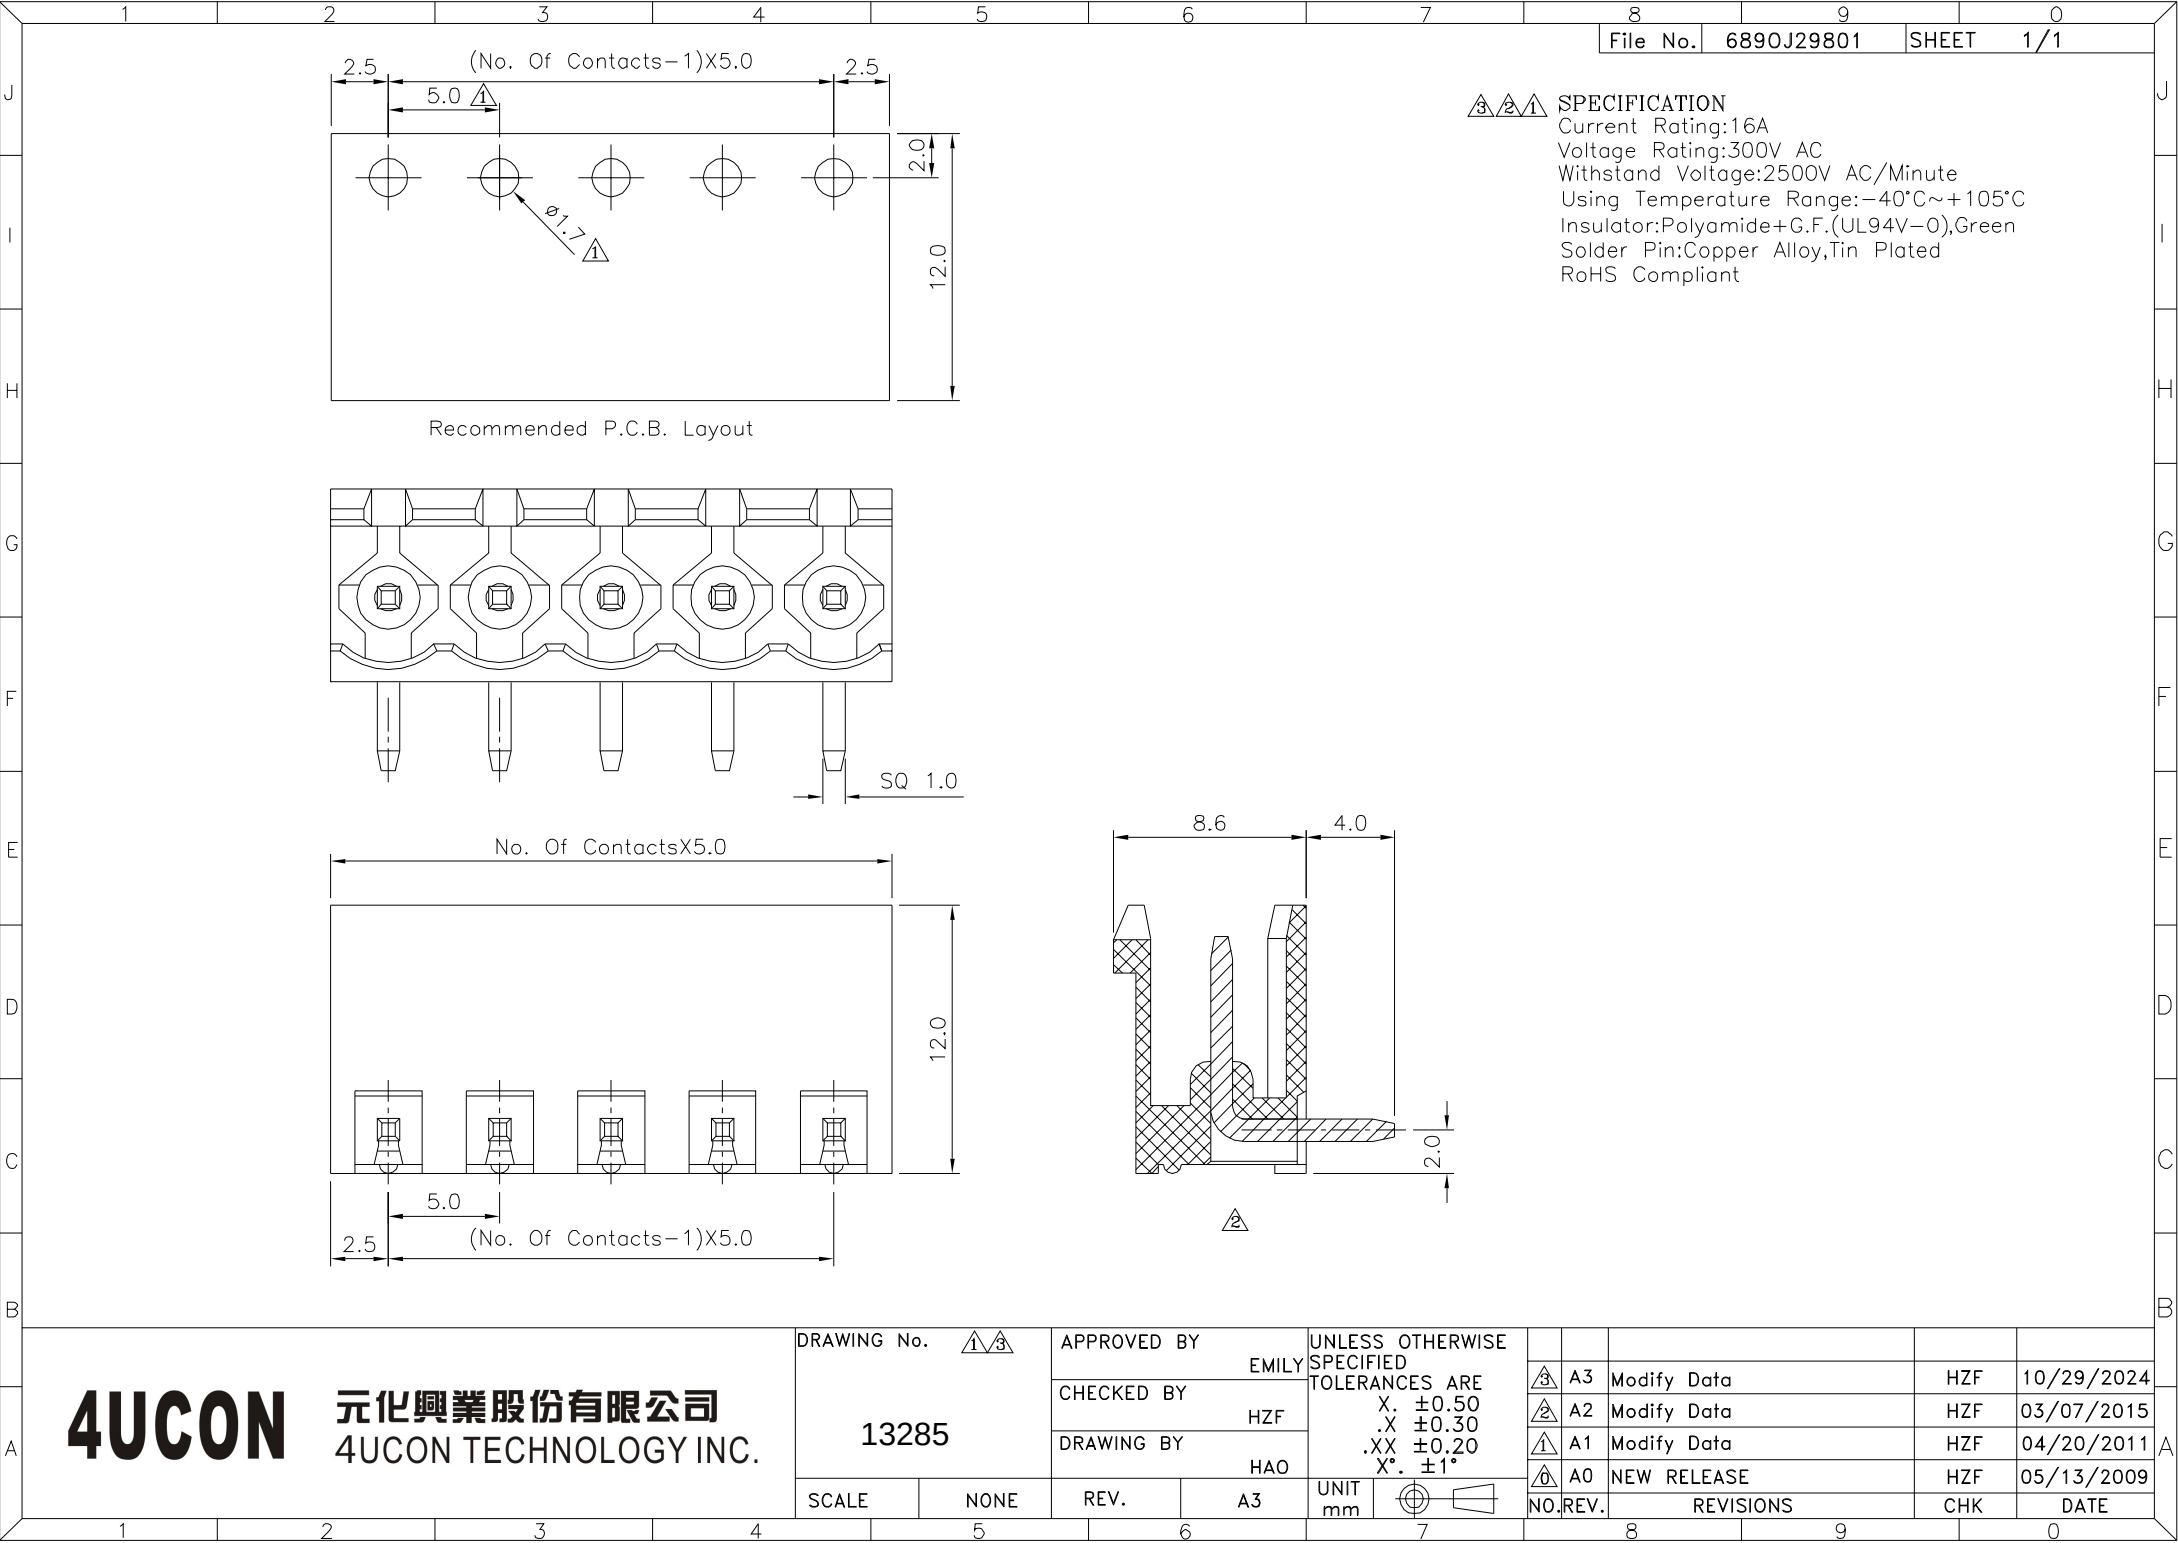

△△△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:-40°C~+105°C
Insulator:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1 3 13285		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X°. ±1°							
		EMILY				3	A3	Modify Data		HZF	10/29/2024
		CHECKED BY				2	A2	Modify Data		HZF	03/07/2015
		HZF				1	A1	Modify Data		HZF	04/20/2011
		DRAWING BY			0	A0	NEW RELEASE		HZF	05/13/2009	
SCALE		NONE		REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE