


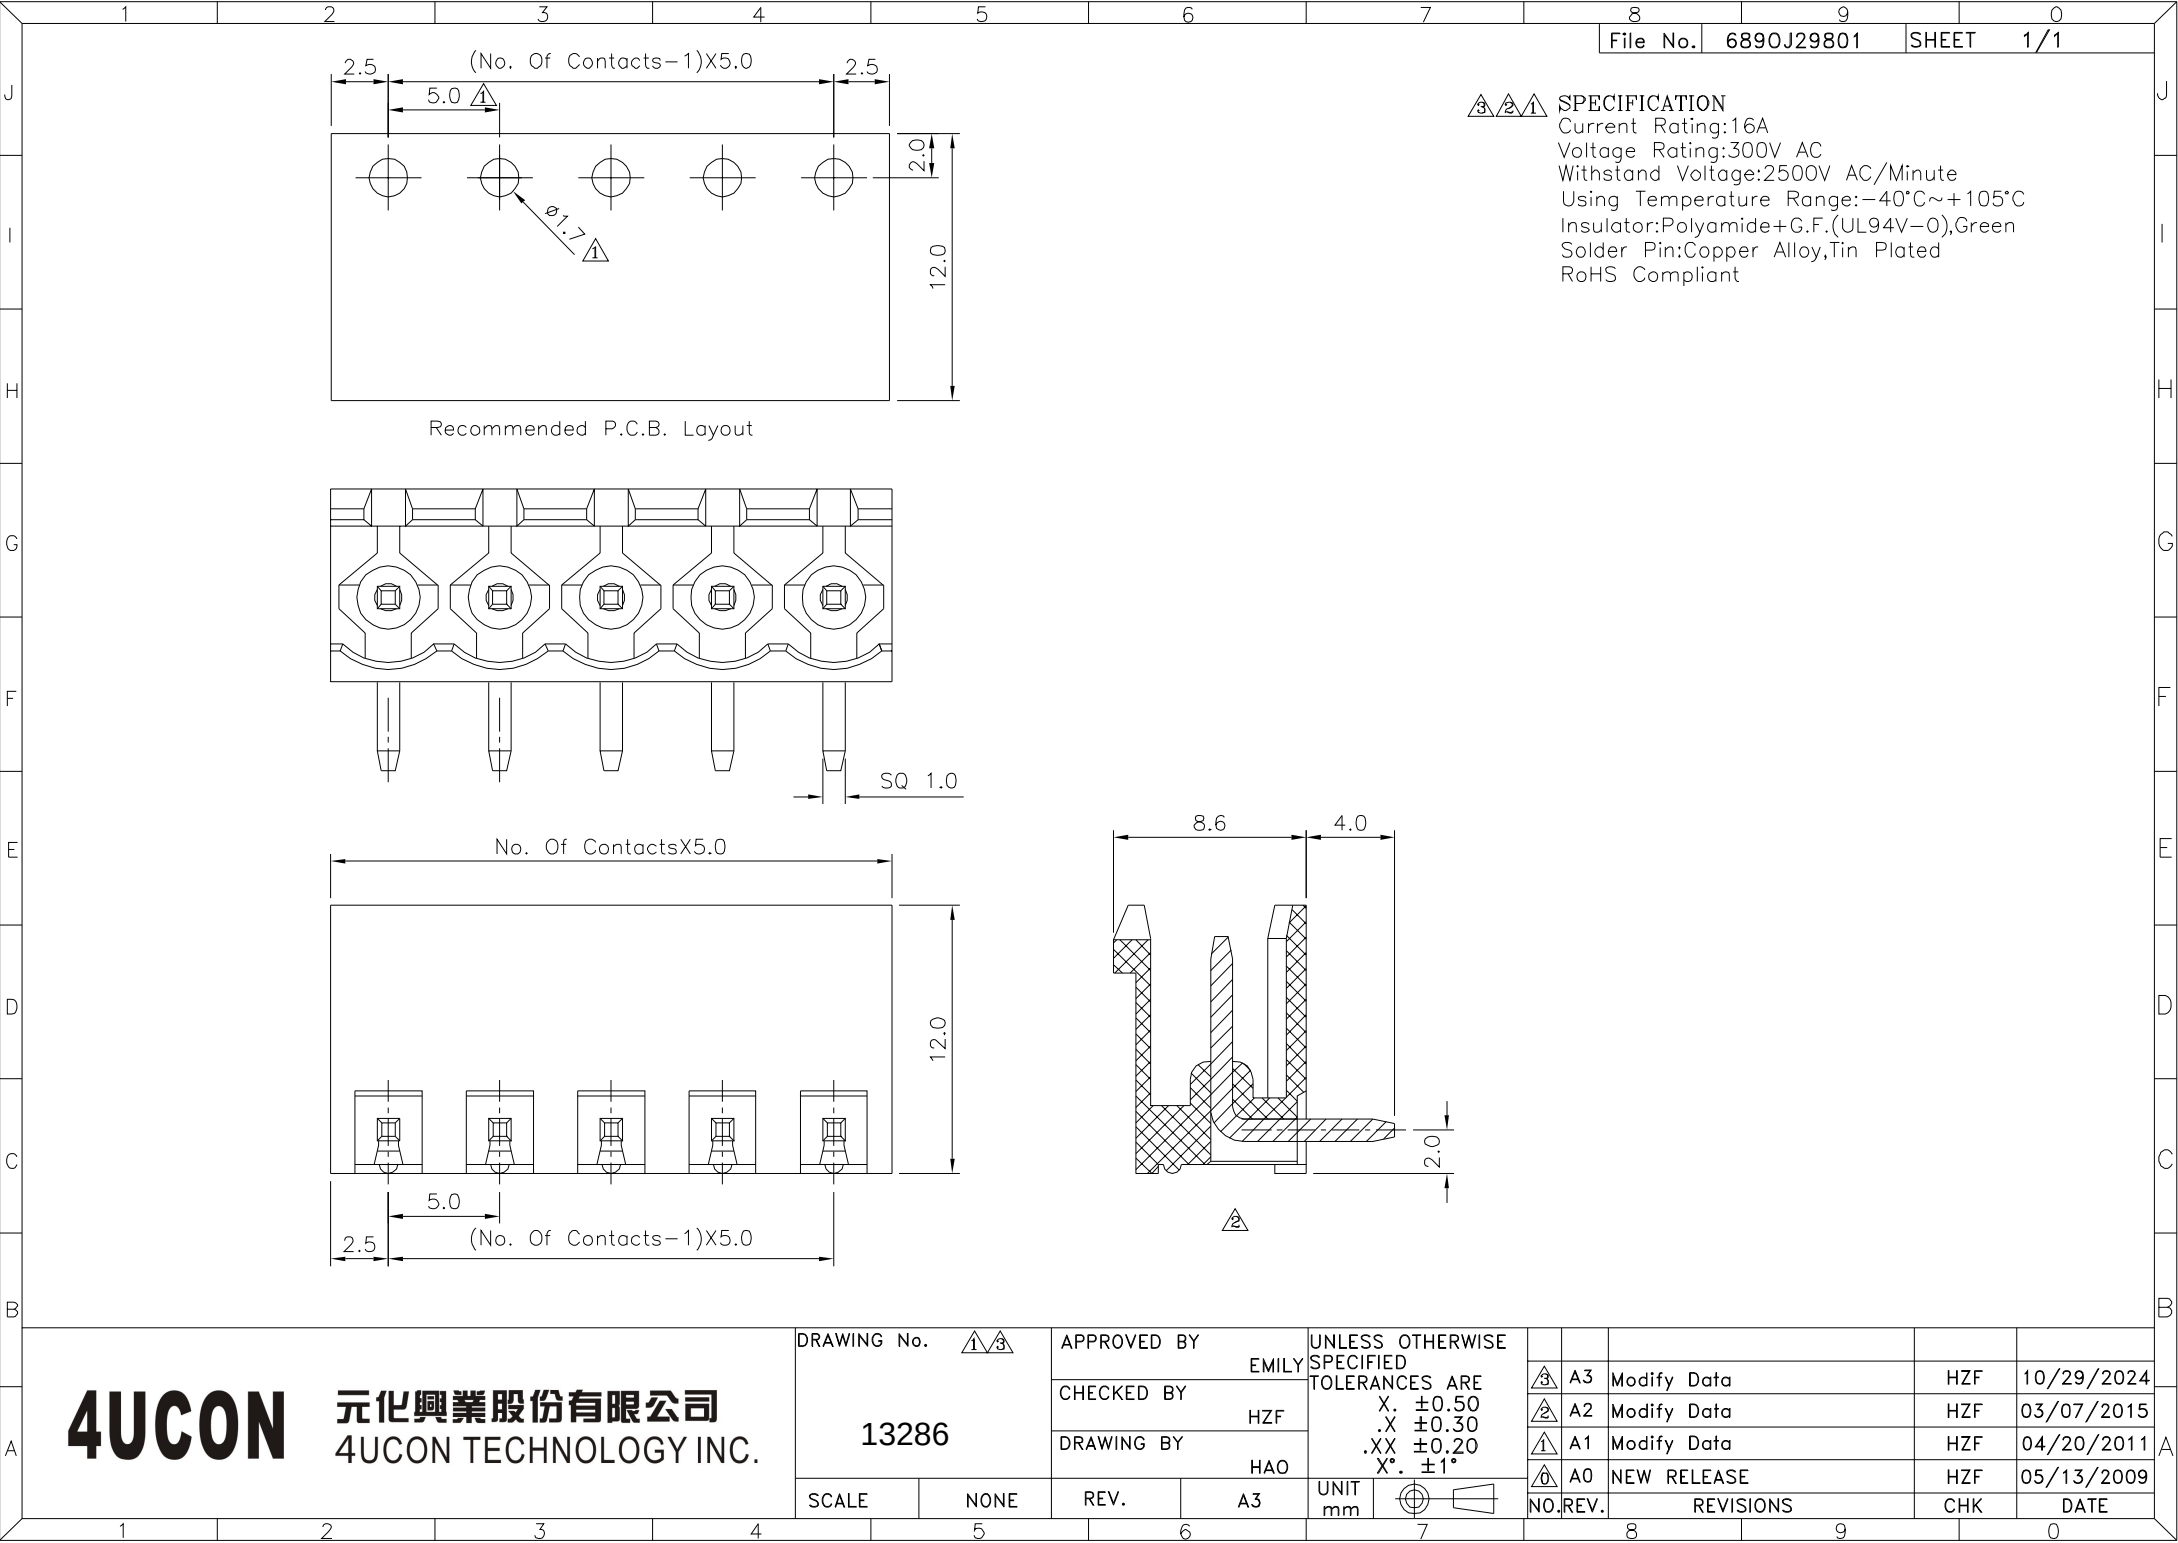

△△△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:-40°C~+105°C
Insulator:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△

13286

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X° ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△△	A3	Modify Data	HZF	10/29/2024
△△	A2	Modify Data	HZF	03/07/2015
△△	A1	Modify Data	HZF	04/20/2011
△△	A0	NEW RELEASE	HZF	05/13/2009