

SPECIFICATION

1. Material & Finish

Base: PA9T(UL94V-0)

Slider: PPS(UL94V-0)

Contact: Phosphor Bronze, Tin Plated Over Nickel

Me: Brass, Tin Alloy Plated

2. Electrical Characteristics

Current Rating: 0.5 Amp Max.

Voltage Rating: 100V AC Max.

Contact Resistance: 30 Milliohms Max.

Insulation Resistance: 500 Megaohms Min.







Dielectric Withstanding Voltage: 500V AC RMS

3. Environmental Characteristics

Operation Temperature: -40°C ~ +85°C

Processing Temperature: 260±5° For 30s

4. RoHS Compliant

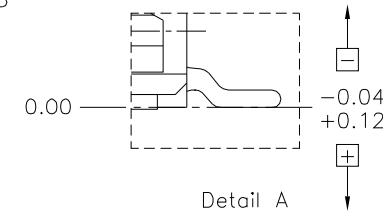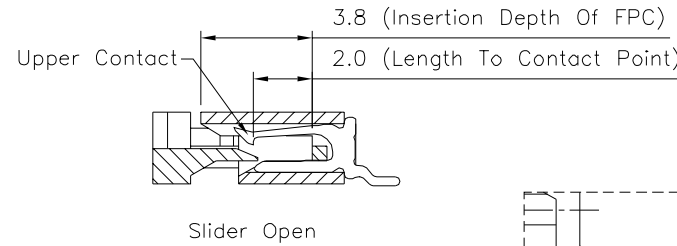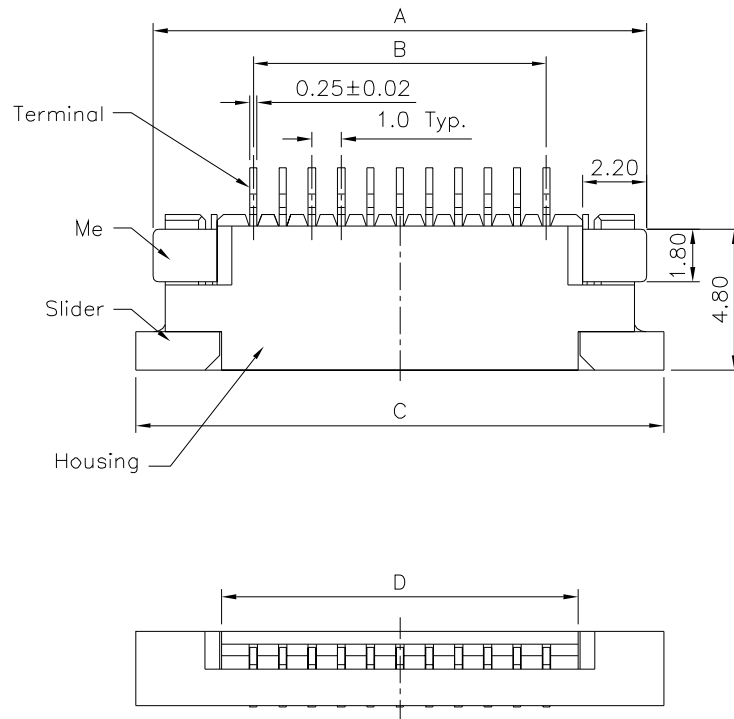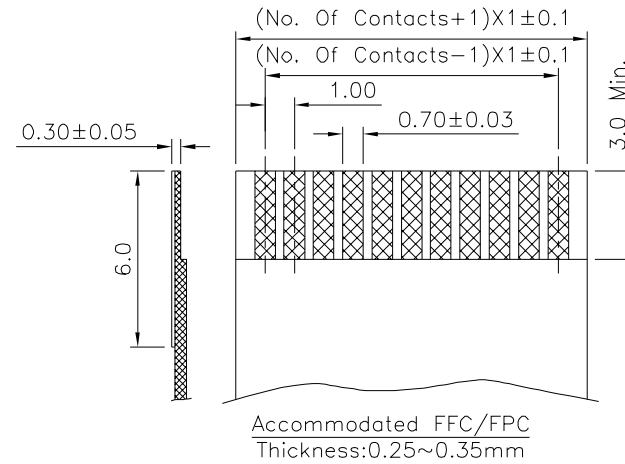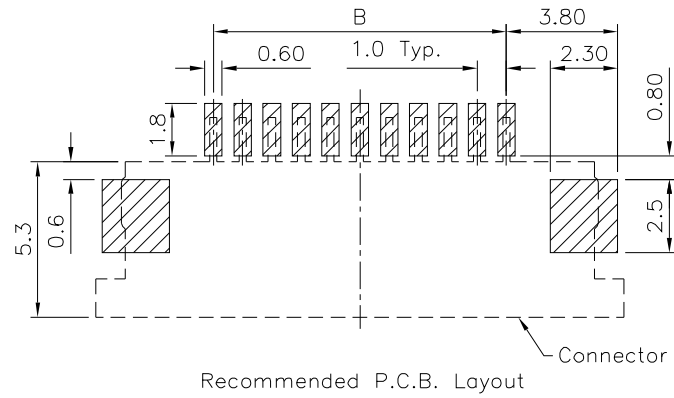

Pin	A±0.25	B±0.15	C±0.20	D±0.10
*4	10.00	3.00	11.00	5.05
*5	11.00	4.00	12.00	6.05
*6	12.00	5.00	13.00	7.05
*7	13.00	6.00	14.00	8.05
*8	14.00	7.00	15.00	9.05
*9	15.00	8.00	16.00	10.05
*10	16.00	9.00	17.00	11.05
11	17.00	10.00	18.00	12.05
*12	18.00	11.00	19.00	13.05
13	19.00	12.00	20.00	14.05
14	20.00	13.00	21.00	15.05
*15	21.00	14.00	22.00	16.05
*16	22.00	15.00	23.00	17.05
17	23.00	16.00	24.00	18.05
*18	24.00	17.00	25.00	19.05
*19	25.00	18.00	26.00	20.25
20	26.00	19.00	27.00	21.05
*21	27.00	20.00	28.00	22.05
*22	28.00	21.00	29.00	23.05
23	29.00	22.00	30.00	24.05
24	30.00	23.00	31.00	25.05
25	31.00	24.00	32.00	26.05
26	32.00	25.00	33.00	27.05
*27	33.00	26.00	34.00	28.05
28	34.00	27.00	35.00	29.05
29	35.00	28.00	36.00	30.05
*30	36.00	29.00	37.00	31.05
31	37.00	30.00	38.00	32.05
32	38.00	31.00	39.00	33.05
33	39.00	32.00	40.00	34.05
34	40.00	33.00	41.00	35.05

The Mark Of "*" Are Reel Tooled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13370

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

C2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE.XX ±0.25
ANG.

UNIT

mm



C2

Modify Data

HZF

08/03/2019

C1

Modify Data

HZF

03/01/2017

C0

NEW RELEASE

HZF

06/09/2016

NO. REV.

REVISIONS

CHK

DATE