




△

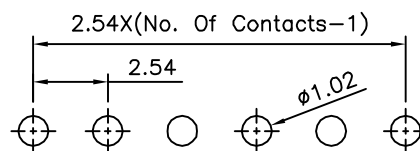

Recommended P.C.B. Layout

△SPECIFICATION

Current Rating:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 △Contact:Brass,Gold Flash Over Nickel
 △No. Of Contacts:02~40 Contacts
 RoHS Compliant

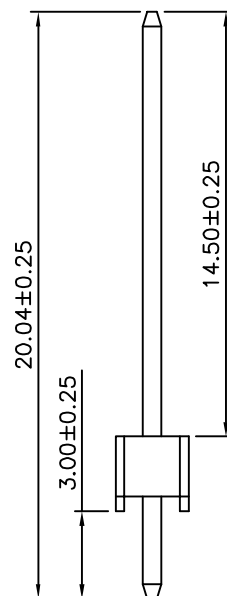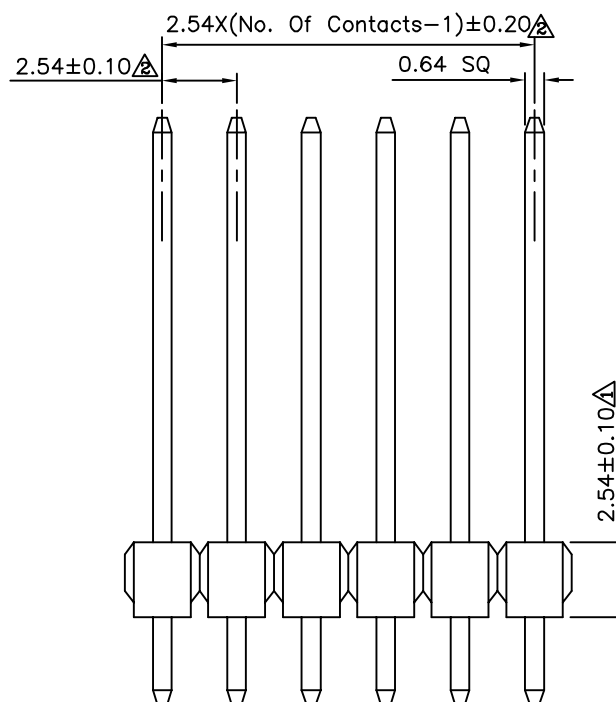

△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13375

APPROVED BY
 EMILY

CHECKED BY
 HZF

DRAWING BY
 GAO

SCALE


NONE

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



△A2	A2	Modify Data	HZF	04/02/2013
△A1	A1	Modify Data	HZF	08/30/2010
△A0	A0	NEW RELEASE	HZF	10/18/2006
NO.	REV.	REVISIONS	CHK	DATE