

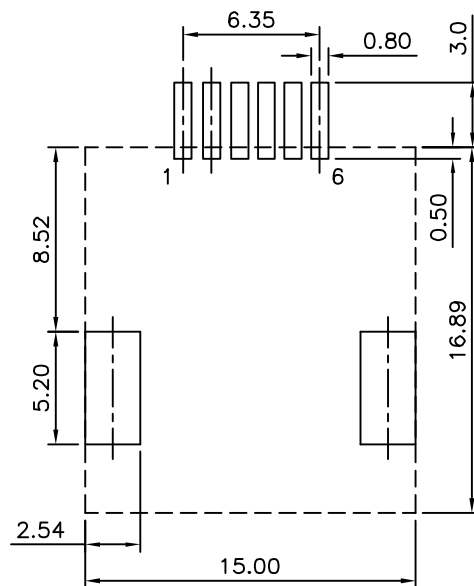
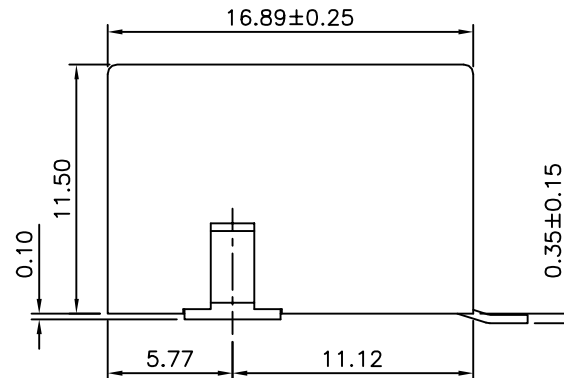
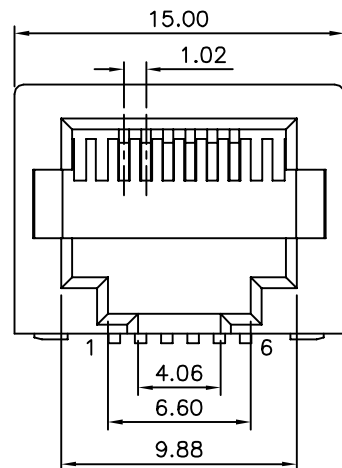


△ SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:-40°C~+85°C
Relative Humidity:70% ±10%RH
Insulation Resistance:500 Megaohms Min. Initial
At 500V DC
Contact Resistance:20 Milliohms Max. Initial
30 Milliohms Max. Final
Durability:750 Cycles
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between
Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between
Shield And Contacts
Housing:PA9T(UL94V-0),Black
Insert Housing:PA9T(UL94V-0),Black
Contact:Phosphor Bronze
Gold Plated 06u" On Contact Area,
Gold Flash On Other Area,Over Nickel
Hold Down:Brass,Tin Plated
Cavity Conforms To FCC Rules And
Regulations Part 68,Subpart F.
RoHS Compliant

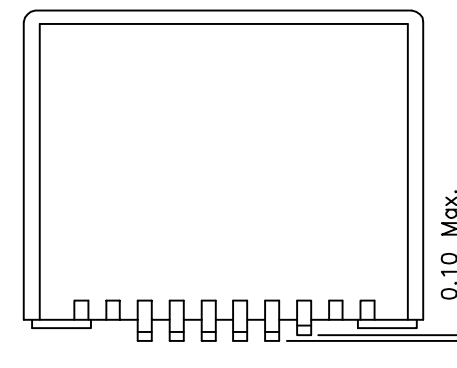

Recommended P.C.B. Layout

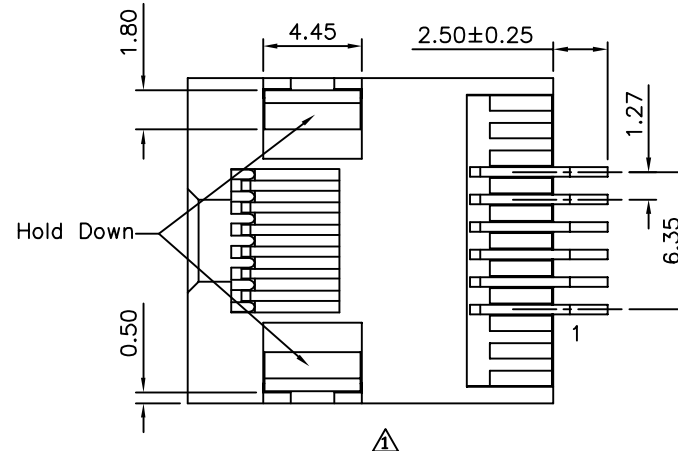

Coplanarity:
The Maximum Distance
Between Lowest And
Highest Pin When
Housing Rests
On A Flat Surface

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13395

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.25
.XX ±0.13
.XXX ±0.05
ANG. ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	01/05/2016	
△ A0	NEW RELEASE	HZF	02/07/2013	