
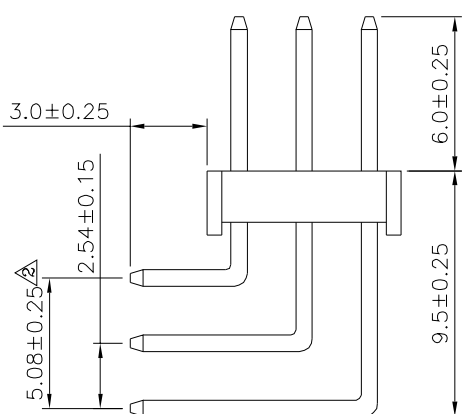
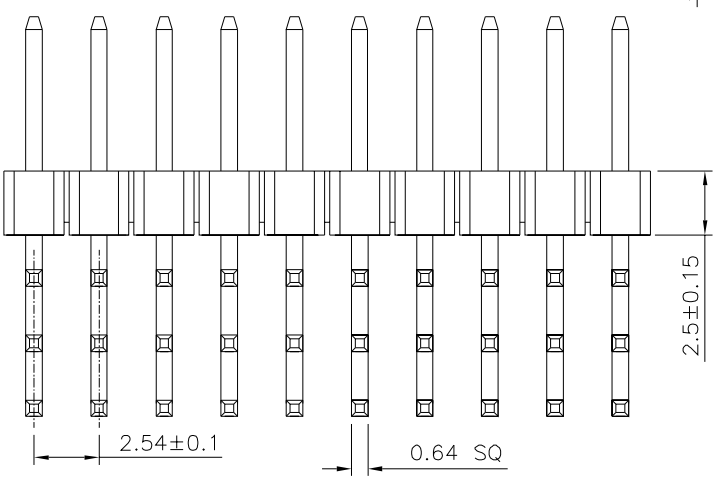
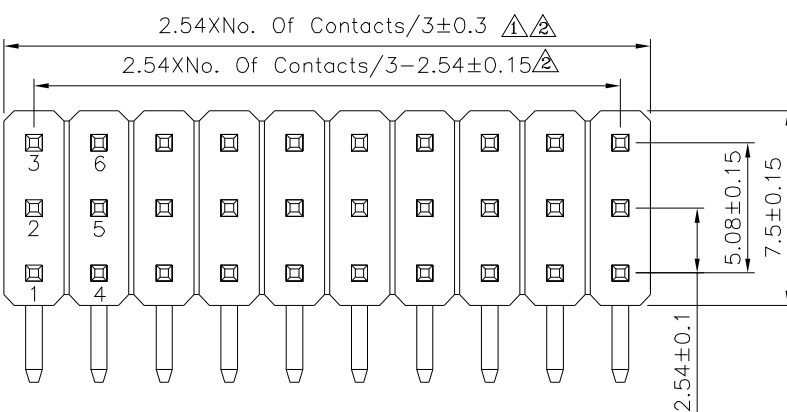


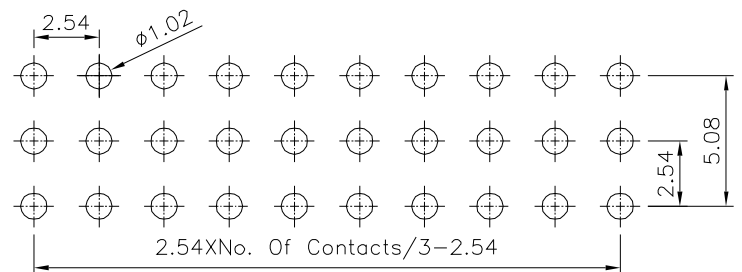

**SPECIFICATION**  
Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Brass,Gold Flash Over Nickel  
⚠ Insulator:PA9T(UL94V-0),Black  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
**13641**

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
CYP  
UNIT  
mm

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.25 X.\* ±2\*  
.X ±0.20 .X\* ±1.5\*  
.XX ±0.15 .XX\* ±1\*  
.XXX ±0.10 .XXX\* ±0.5\*  
NO. REV. REVISIONS

|          |           |             |      |            |
|----------|-----------|-------------|------|------------|
| 3        | A3        | Modify Data | HZF  | 10/20/2023 |
| 2        | A2        | Modify Data | HZF  | 01/12/2022 |
| 1        | A1        | Modify Data | HZF  | 02/08/2017 |
| 0        | A0        | NEW RELEASE | HZF  | 08/09/2014 |
| NO. REV. | REVISIONS | CHK         | DATE |            |