

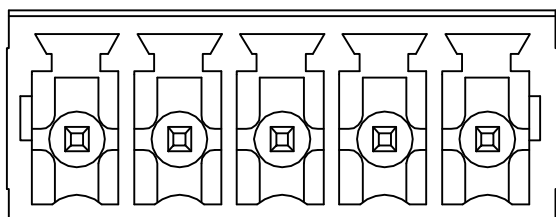


Recommended P.C.B. Layout

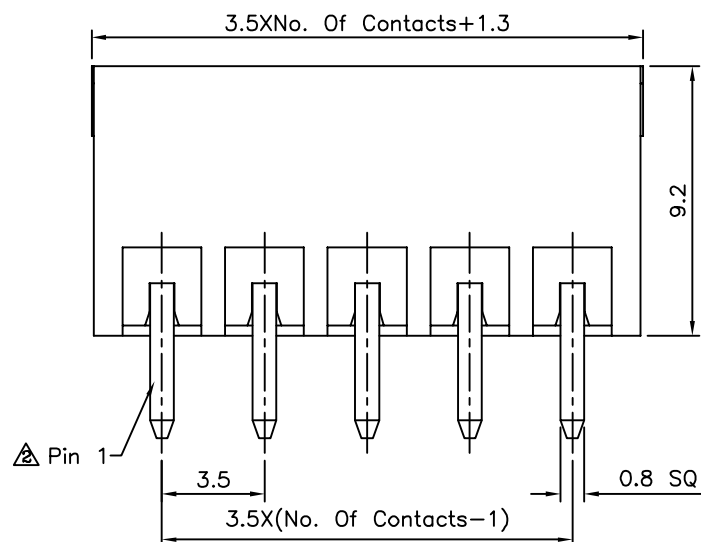

3/4

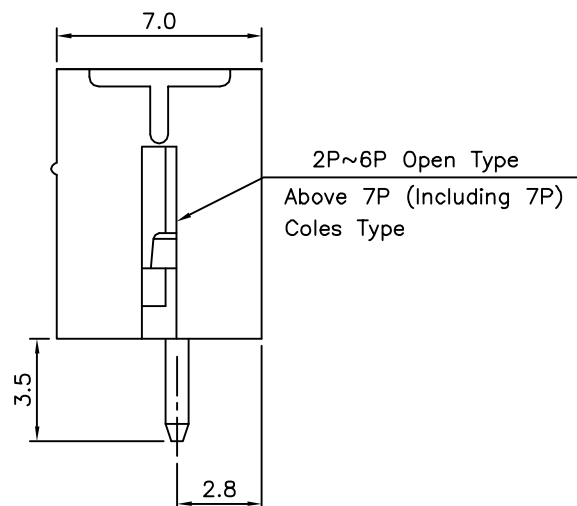

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec/1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
,Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13755

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	05/28/2012
△ A3		Modify Data	HZF	11/23/2011
△ A2		Add Pin 1	HZF	11/22/2011
△ A1		Modify Data	HZF	10/14/2011
△ A0		NEW RELEASE	HZF	04/07/2009