

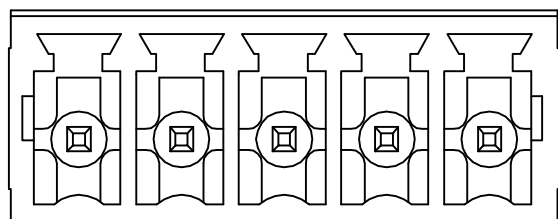


Recommended P.C.B. Layout

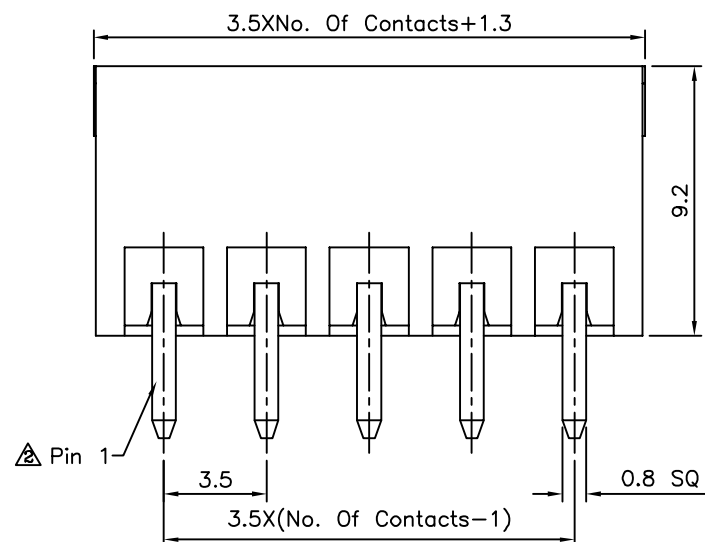

3/4

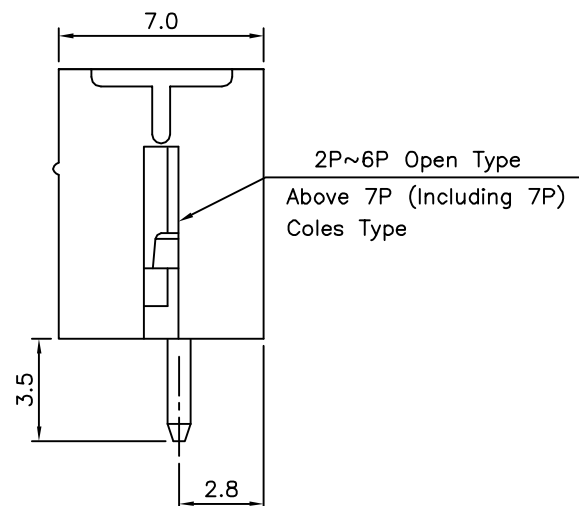

△ SPECIFICATION

Current Rating:12 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec/1 PCS

Operation Temperature:-40°C~+105°C

Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
,Green

Solder Pin:Copper Alloy,Tin Plated

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13758

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm

△ A4

Modify Data

HZF

05/28/2012

△ A3

Modify Data

HZF

11/23/2011

△ A2

Add Pin 1

HZF

11/22/2011

△ A1

Modify Data

HZF

10/14/2011

△ A0

NEW RELEASE

HZF

04/07/2009

NO. REV.

REVISIONS

CHK

DATE