
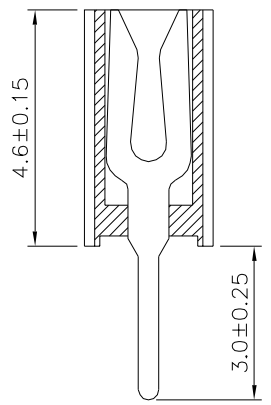
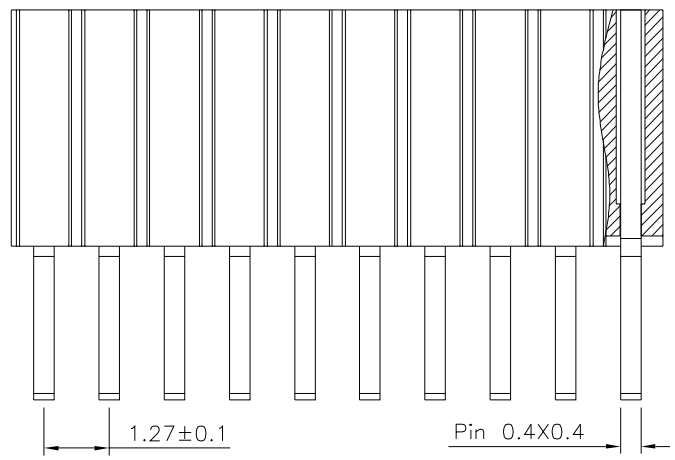


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

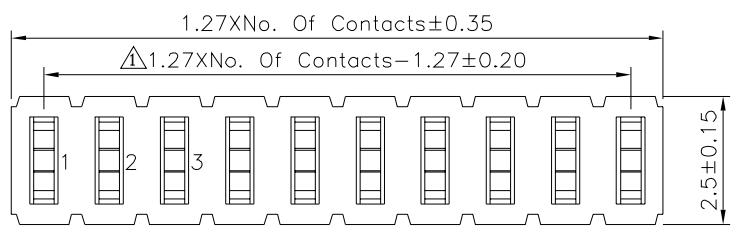

SPECIFICATION

Current Rating: 1 Amp
 Withstand Voltage: 500V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -40°C ~ +105°C
 Insulator: PA6T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
13773		MEI		
		CHECKED BY		
SCALE NONE		HZF		
		DRAWING BY		
REV. A1		HAO		X: ±0.25 X.: ±2° .X ±0.20 .X. ±1.5° .XX ±0.15 .XX. ±1° .XXX ±0.10 .XXX. ±0.5°
UNIT	mm			NO. REV.

A1		Modify Data	HZF	03/26/2016
A0		NEW RELEASE	HZF	02/01/2015
NO. REV.		REVISIONS	CHK	DATE