

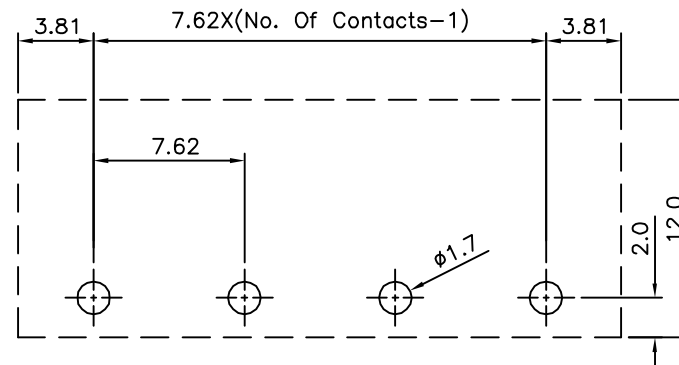
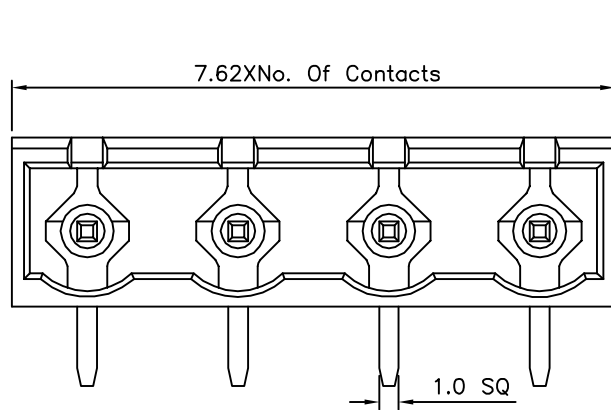


△SPECIFICATION

Current Rating:16A
 Voltage Rating:300V AC
 Withstand Voltage:2500V AC For 1 Minute
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5s Max.
 Insulator Body:Polyamide+G.F.(UL94V-0),Green
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant



Recommended P.C.B. Layout

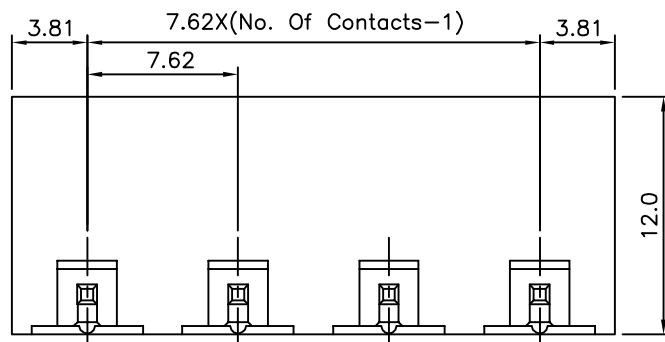

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13857

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


GAO

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.15
 .XXX ±0.05
 ANG. ±1°

UNIT
 mm



NO.

REV.

REVISIONS

REVISIONS

CHK

DATE

A1 Modify Spec.

A0 NEW RELEASE

HZF

03/13/2013

HZF

03/10/2010